




GENUINE PARTS CATALOG

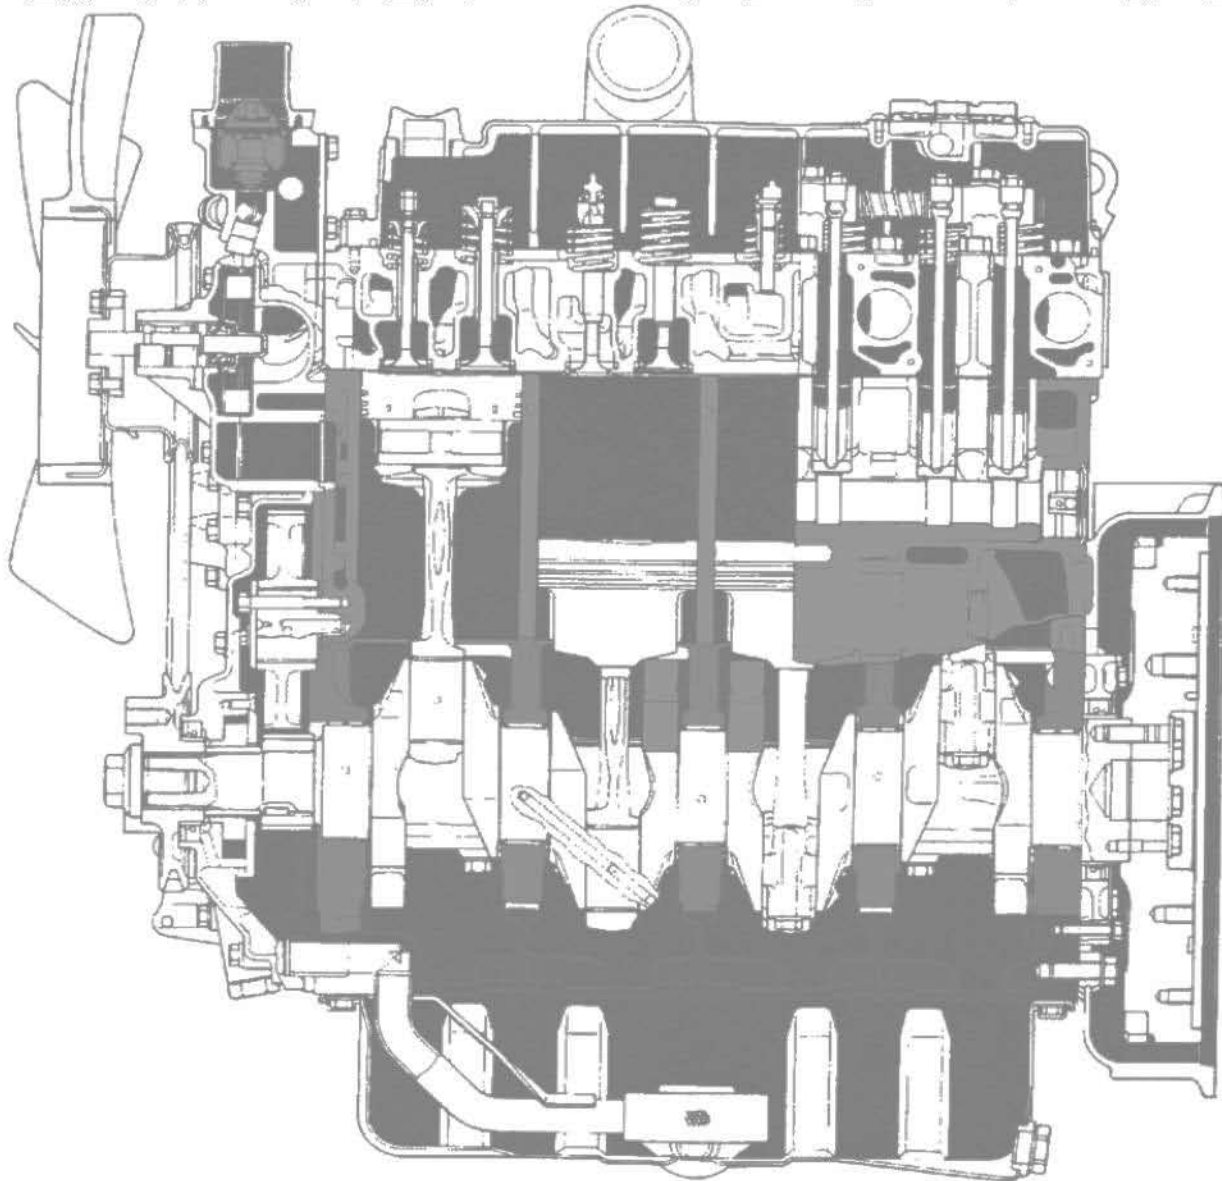

KUBOTA CANADA LTD

TOUGH
Kubota
STUFF

Updated Oct 1, 2008

[Index >](#)



Table of Contents

1- Introduction

Genuine Parts Catalogue - Important Notice	1-3
Equipment Manufactures Reference	1-4
Kubota Engine Families	1-6
How to Read Model Name	1-10
How to Read Serial Number	1-12
Serial Number Locations	1-14
Workshop Manuals	1-15

2- Filters

Standard Kubota Filters	2-1
-------------------------	---------------------

3- Metal Kits

Typical Page	3-1
Metal Kits	3-2

4- Piston Kits

Typical Page	4-1
Piston kits	4-2

5- Gasket Kits

Typical Page	5-1
Gasket Kit Index	5-2
Gasket kit Contents	5-6

6- Option Kits

Typical Page	6-1
Option Kits Index	6-2
Rad Option Kit Contents	6-8
Air Cleaner Option Kit Contents	6-38
Fuel Filter Option Kit Contents	6-46
Muffler Option Kit Contents	6-48
Complete Accessories Kit Contents	6-54

7- Miscellaneous

Block Heaters	7-1
Block Heater Contents	7-3
Starter Switches Assemblies & Keys	7-6
Miscellaneous Part Numbers	7-9
Paint	7-9
Batteries	7-9
GL Panel Covers	7-9
GL Remote Starts	7-9
Sealants	7-9
Complete O-Ring Kit	7-9
Machine to Engine Cross Reference	7-10
Glow Plug Specifications	7-14
Alternator Specifications - IC Regulator Type	7-16
AC Dynamo Specifications	7-20
Stop Solenoid Specifications	7-22
Starter Specifications	7-24

Important Notice

IMPORTANT: This catalog is the property of KUBOTA CANANDA LTD. It is published and provided to Canadian distributors only. Please do not copy or reproduce this catalog (complete or portions) in any format without the prior written approval of Kubota Canada Ltd.

- When revision are made each distributor will be provided with a new version of the parts catalog
- All data in this catalog is considered to be accurate at time of printing and is subject to change without notice
- This catalog is only a reference guide. The proper selection of replacement parts requires accurate model identification. YOU ALONE must decide if your parts selection are correct for the applicable engine model.
- If you find a questionable part number please call to let us know, so we can change it for the revised copy.

Equipment Manufactures Reference

MANUFACTURES NAME		PARTS BOOK ABBREVIATION	
MANUFACTURES NAME	BRAND	PRIOR TO 2005	PRESENT
ALLMAND BROS	ALLMAND	A.BROS	ABR
ATLAS COPCO AIRPOWER N.V	ATLAS		ACP
ALLEN	ALLEN	ALLEN	ALN
TEREX	AMIDA	AMIDA	AMD
ASPLUNDH	ASPLUNDH	ASPLUNDH	APLD
ARIENS	ARIENS/WOODS/GRAVELY	ARIENS	ARS
APPLIED SWEEPER	APPLIED SWEEPER	A.SWEEPER	ASW
A.T.C	TELEFLEX	A.T.C	ATC
BURKEEN	BURKEEN	BURKEEN	BKN
BOMAG	BOMAG	BOMAG	BMG
BROCE	BROCE	BRCE	BRCE
BROOKS PERKINS	BROOKS/PERKINS	BROOKS	BRK
LIBRA COMPACT	LIRA/VERMEER/TRAK	LIBRA	CAMS
TEREK	COLEMAN	COLEMAN	CLM
CORNIVER	CORNIVER	CORNIVER	CNV
CHARLES MACHINE	DITCH WITCH	D.WITCH	DWCH
EPS		EPS	EPS
EXCEL	HUSTLER	EXCEL	EXL
FINN	FINN	FINN	FINN
FLORY	FLORY	FLORY	FLR
FISHER	FISHER	FISHER	FSR
GEHL	GEHL	GEHL	GEHL
TEREX	GENIE/TEREX	GENIE	GNI
GENSET	THERMAL RC	GENSET	GNST
GRIMMER SCHMIDT	GRIMMER SCHMIDT	GRIMMER	GRM
GROVE	GROVE	GROVE	GRV
H.G.MAKELIM		HGM	HGM
ICEMASTER	FISHER PANDA	ICEMASTER	IMS
INGERSOL RAND	BLAW KNOX	IRBK	IRBK
JLG	JLG	JLG	JLG
KANGA	KANGA	KANGA	KAN
MOFFETT KOOI	KOOI	KOOI	KOOI
LINCOLN ELECTRIC	LINCOLN	LINCLN	LCN
BR.LEE	BR.LEE		LEE
LASTEC	LASTEC	LASTEC	LTC
LITTAU	LITTAU	LITTAU	LTU

[more...](#)

Equipment Manufactures Reference (continued)

MANUFACTURES NAME		PARTS BOOK ABBREVIATION	
MANUFACTURES NAME	BRAND	PRIOR TO 2005	PRESENT
MECHRON	MECHRON	MECHRON	MCR
MADVAC	MADVAC	MADVAC	MDV
MOFFETT LOOI	MOFFETT	MOFFETT	MFT
MILLER WELDER	MILLER	MILLER	MLR
MANITOU	MANITOU	MANITOU	MNT
MINUTEMAN	MINUTEMAN	MINUTEMAN	MNTM
DENYO	MULTIQUIP	DENYO	DENYO
MORIDGE	GRASSHOPPER	MORIDGE	MRG
NANNI	NANNI	NANNI	NANI
PANY PACK	PONY PACK	PONY PACK	PPC
PRINCETON	PRINCETON	PRINCETON	PRT
POWER TECHNOLOGY SYSTEM INC.	PTSI	PTSI	PTSI
QUALITY	DONKEY	QUANTITY	QLT
INGERSOL RAND	INGERSOL RAND	INGERSOL	RAND
RED-D-ARC	RED-D-ARC	R.D.A	RDA
KUBOTA CANADA LTD	KCL	KCL	KCL
KUBOTA ENGINE AMERICA	REAR END PLATE	REP	REP
SOUTHEASTERERN POWER PRODUCTS	PHASOR MARINE	SEP	SEPP
SKYJACK	SKYJACK	SKYJACK	SJC
SNORKEL	SNORKEL	SNORKEL	SKL
SULLAIR	SULLAIR	SULLAIR	SLR
SNAPPER	SNAPPER	SNAPPER	SNP
SPYDER	SPYDER	SPYDER	SPD
T&J	T&J	T&J	TJM
THOMAS	THOMAS	THOMAS	TMS
TENNANT	TANNANT	TENNANT	TNAT
SCAT TRAK	SCAT TRAK/TRAK	TRAK	TRK
TYMCO	TYMCO	TYMCO	TYMC
VERMEER	VERMEER	NMR	VMR
WALKER	WALKER	WALKER	WLKR
MULTIQUIP	WHITEMAN	WHMAN	WMN
WOODMIZER	WOODMIZER	MIZER	WMZ

Kubota Engine Families

SERIES NAME	MODELS			
	PRE TIER ENGINES	TIER 1 ENGINES	TIER 2 ENGINES	CURRENT PRODUCTION ENGINES
Super Mini 62.2 mm	Z400	Discontinued for KCL use, replacement engines use NSM.		
	Z430			
	D600			
	D640			
	V800			
	WG600			
New Super Mini 68mm	Z482	Same	Z482-E2	Z482-E3
	D662	Same	D662-E2	Discontinued for KCL use
	D722	Same	D722-E2	D722-E3
	WG/DF750	Discontinued replaced by WG/DF 752		
		WG/DF752	WG/DF752-E2	WG/DF 752-E2
New Super Mini 73.6 mm		Z602	Z602-E2	Z602-E3
		D902	D902-E2	D902-E3
		WG/DF972	WG/DF972-E2	WG/DF972-E3
70 mm	Z500	Discontinued for KCL use.No replacement engines.		
	Z600			
	ZH600			
	Z600BG			
	D650			
	D750			
	D850			
	DH850			
	D950			
	D950BG			
	V1100			
	VH1100			
	V1200			
	V1200BG			
05 Series 73.6 mm	D905	SAME	D905-E2	Discontinued for KCL use
	D905BG	SAME	D905-E2BG	
	D1005	SAME	D1005-E2	D1005-E3
	D1005BG	SAME	D1005-E2BG	D1005-E3BG
	V1205	SAME	V1205-E2	Discontinued for KCL use
	V1205BG	SAME	V1205-EBG	
	V1305	SAME	V13505-E2	Discontinued for KCL use
	V1305BG	SAME	V1305-E2BG	
	WG/DF1005	SAME	WG/DF1005-E2	WG/DF1005-E2

Kubota Engine Families (continued)

SERIES NAME	MODELS			
	PRE TIER ENGINES	TIER 1 ENGINES	TIER 2 ENGINES	CURRENT PRODUCTION ENGINES
05 Series 78.4 mm	D1105	SAME	D1105-E2	D1105-E3
	D1105T	SAME	D1105T-E2	D1105T-E3
	D1105BG	SAME	D1105-E2BG	D1105-E3BG
	V1505	SAME	V1505-E2	V1505-E3
	V1505T	SAME	V1505T-E2	V1505T-E3
	V1505BG	SAME	V1505-E2BG	V1505-E3BG
82 mm	Z751	Discontinued for KCL use. For replacement engines use 03 series.		
	Z851			
	D1102			
	D1302			
	D1402			
	D1402BG			
	V1502			
	V1702			
	V1902			
	V1902BG			
	S2600			
	S2800			
03 Series 92.4 mm	S2800BG			
	D1403	SAME	D1403-E2	Discontinued for KCL use
	D1403BG	SAME	D1402-E2BG	
	D1503	SAME	D1503-E2	
	D1703	SAME	D1703-E2	
	D1703BG	SAME	D1703-E2BG	
	V1903	SAME	V1903-E2	
	V1903BG	SAME	V1903-E2BG	
	V2003T	SAME	V2003T-E2	
	V2003TBG	SAME	V2003T-E2BG	
	V2203DI	SAME		
	V2203	SAME	V2203-E2	
	V2203BG	SAME	V2203-E2BG	
	F2503T	SAME		
	F2803	SAME		
	F2803BG	SAME		

[more...](#)

Kubota Engine Families (continued)

SERIES NAME	MODELS			
	PRE TIER ENGINES	TIER 1 ENGINES	TIER 2 ENGINES	CURRENT PRODUCTION ENGINES
03M 92.4 mm			D1503M-E2	D1503M-E3
			D1703M-E2	D1703M-E3
			D1803M-E2	D1803M-E3
			V2003M-E2	V2003M-E3
			V2003MT-E2	V2003MT-E2
			V2403M-E2	V2403M-E3
			V2403MT-E3	V2403MT-E3
V3 Series 110 mm/120 mm	V3300	SAME	V3300-E2	Discontinued for KCL use
	V3300DI	SAME	V3300DI-E2	Discontinued for KCL use
	V3300BG	SAME	V3300-E2BG	V3300-E3BG
	V3300T	SAME	V3300T-E2	Discontinued for KCL use
	V3300TDI	SAME	V3300TDI-E2	Discontinued for KCL use
	V3300TBG	SAME	V3300T-E2BG	Discontinued for KCL use
				V3600-E3
				V3600T-E3
			V3800DI-E2	V3800DI-E3
			V3800TDI-E2	V3800TDI-E3
07 Series				V2607DIT-E3
				V3307DIT-E3
115 mm	D3200	Discontinued for KCL use		
	V4300			
	V4300T			
125 mm	D3502	Discontinued for KCL use		
	D3502BG			
	V4702			
	V4702T			
	V4702BG			
	F5802T			
OC Series	OC60	SAME	OC60-E2	OC60-E3
	OC95	SAME	OC95-E2	OC95-E3

[more...](#)

Kubota Engine Families (continued)

SERIES NAME	MODELS			
	PRE TIER ENGINES	TIER 1 ENGINES	TIER 2 ENGINES	CURRENT PRODUCTION ENGINES
Horizontal Engines	EA200	SAME		
	EA300	SAME	EA300-E2	EA330-E3
	EB300	SAME		
	EL300	SAME	EL300-E2	
	RK501			
	RK601			
	ZB400	SAME		
	ZB500	SAME		
	ZB600	SAME		
	ZB18NB	SAME		
	ZB950NB	SAME		

Note: If replacing any super mini (62.2 mm) with New super mini (68 mm) engines or 82 mm O2 series with 92.4 O3 series the flywheel housing pilot and mounting holes are different and therefore require a new housing. Also the inlet manifolds from O2 to O3

The S2600/S2800 series engines must be rebuilt as there is no direct replacement for all six cylinder engines. Also the F2803 has to be rebuilt as no direct replacement is available.

The O3 series has a larger fan to crankshaft dimension than the O3M radiators will have to be lowered. The O3M has a pull throttle instead of a push.

How To Read Model Name

DIESEL ENGINES ONLY

CYLINDER CODE	M = 03M MATURE SERIES ONLY	INJECTION TYPE: BLANK = INDIRECT INJECTION (IDI) DI = DIRECT INJECTION	EMISSION TYPE; B = EARLIER INDUSTRIAL ENGINE EB = TIER 1 INDUSTRIAL ENGINE E2B = TIER 2 INDUSTRIAL ENGINE	SUFFIX: VERIATION OF SPEC
E = 1 CYL Z = 2 CYL D = 3 CYL V = 4 CYL F = 5 CYL S = 6 CYL				

↓ ↓ ↓ ↓ ↓

V 2003 - M - DI - T - E2B - SAE 2

FIRST 2 DIGITS = APPROXIMATE DISPLACEMENT: EXAMPLE: 482 = 480 CC 722 = 719 CC 1005 = 1001 CC 2003 = 1999 CC	LAST DIGITS = ENGINE SERIES: EXAMPLE: 482 = NSM 722 = NSM 1005 = 05 SERIES 2003 = 03 SERIES	TURBO	OEM SPEC: SAE = SPEC WITH SAE HOUSING REP = SPEC WITH REAR END PLATE KEA = STANDARD KEA SPEC KCL = STANDARD KCL SPEC OEM SPEC ENGINE = SEE PAGE 3

[more...](#)

How To Read Model Name (Continued)

GASOLINE ENGINES ONLY

OPERATING FUEL:

WG = GASOLINE ONLY
DF = GASOLINE / PROPANE
DG = NATURAL GAS

EMISSION TYPE:

B = EARLIER GAS
E = TIER 1 GAS
E2 = TIER 2 GAS



DF 972 - 2 SKY



FIRST 3 DIGITS = APPROXIMATE DISPLACEMENT:

750 = 740 CC
752 = 740 CC
1005 = 996 CC
972 = 962 CC

OEM SPEC:

SKY = SKY JACK
JLG = JLG EQUIPMENT
MORIDGE = GRASSHOPPER

How to Read Serial Number

NOTE: Always obtain serial number when possible. The serial number can help to determine the engines model and help select the correct parts by serial numbers breaks.


OLD FORMAT: 4-6 Numbers that are sequential with no breaks for production month or year.

NEW FORMAT: (After 1997)

Alpha-numeric (XJ 5050 OR 5J5050) with breaks for production month and year.

NEWEST FORMAT: (After May 2007)

This format has now change to accommodate higher production volumes. For engines numbered after 19998, immediately after the production month code , an alphabectical letter is substituted for the first character as the third digit. The letters "I" and "O"will be omitted.

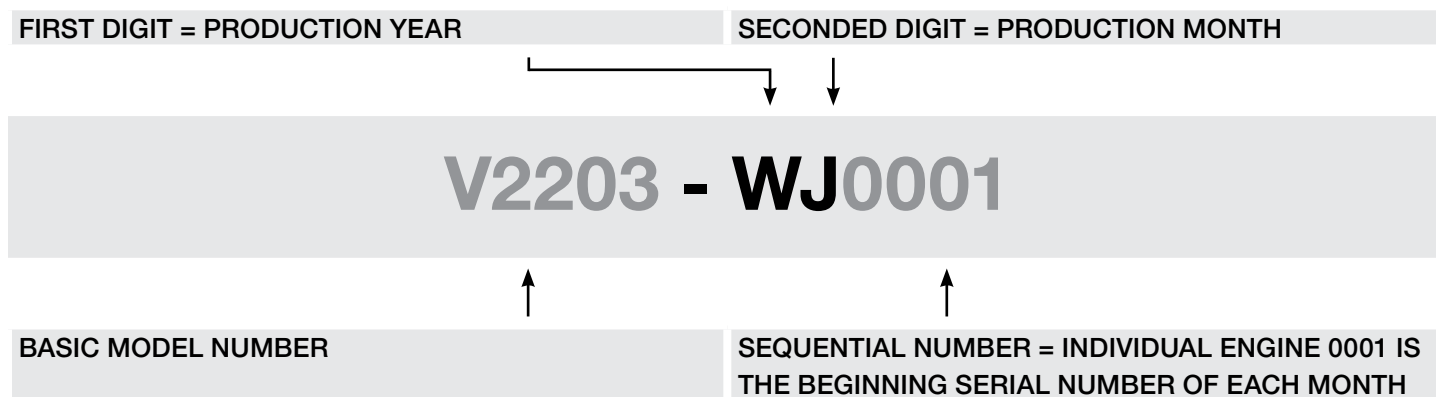

[more...](#)

How to Read Serial Number (continued)

DETAIL:

A) The characters before the “-” indicate the base engine model
eg: 2203

B) The first two characters after the “-” denote the year and month of manufacture.
This method of production date will remain unchanged.
eg: 7A, numeric followed by alphabetic

PRODUCTION YEAR	PRODUCTION MONTH
↓ ↓	
2203 - 6J001	

Production Year	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	
Numerals or Letters	W	X	Y	1	2	3	4	5	6	7	8	9	A	
Production Month			Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0001 ~ 9999			A	C	E	G	J	L	N	Q	S	U	W	Y
10000 ~ 19998			B	D	F	H	K	M	P	R	T	V	X	Z

C) The last four digits of the serial number are sequential, identifying the individual engine.
eg: 6 J 0001, therefore, serial production in May 2006

1 - 9,999	=	6J0001 - 6J9999
10, 000 - 19,998	=	6K0001 - 6K9999


D) This format has now been changed to accommodate higher production volumes. For engines numbered after 19,998, immediately after the production month code, an alphabetical letter is substituted for the first character as the third digit.
The letters “I” and “O” will be omitted.
eg: Production in May 2007

1 - 9,999	=	7J0001 - 7J9999
10, 000 - 19,998	=	7K0001 - 7K9999
19,999 - 20,997	=	7KA001 - 7KA999
20,998 - 21,996	=	7KB001 - 7KB999

After the 21996th unit of production, the third digit used would be C,
After the 22995th unit of production, the third digit used would be D, ect.

Serial Number Locations

05 SERIES & WG/DF 1005

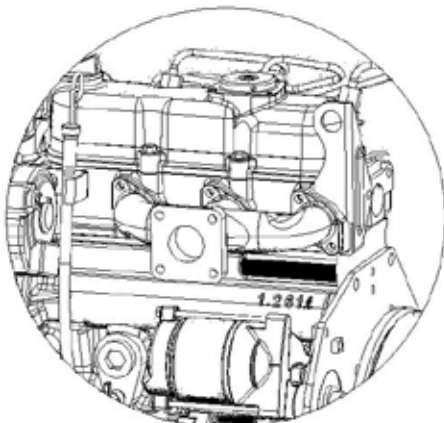


Rear of the block

ALL MODELS




All Models have serial # stickers on the valve cover.

03 SERIES, SUPER MINI & WG/DF/DG

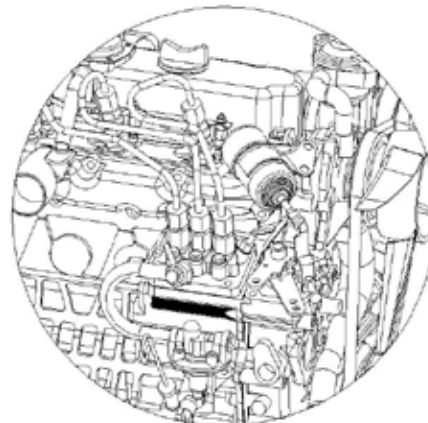


On the block next to the injection pump.

V3300, V3600 & V3800

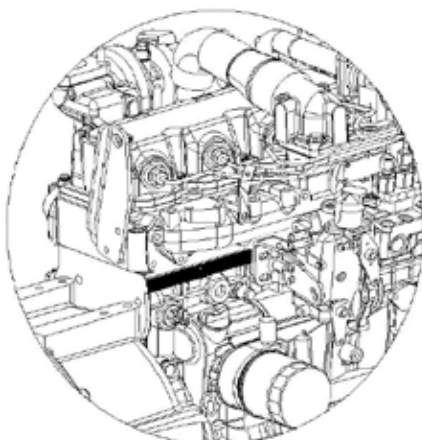


Rear of the block under the Intake Manifold

V2607 & 3307

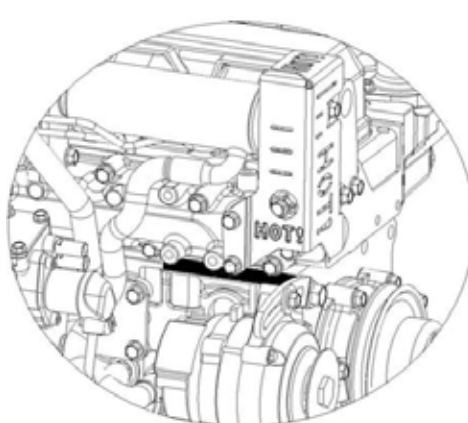

Injection Pump side under Intake manifold

EL/EA/OC & ZB600

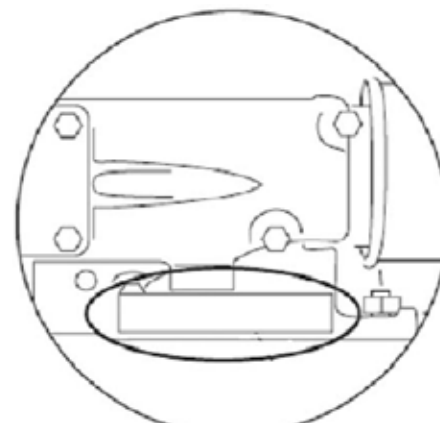


Bottom of the block by the oil filter or on the engine block on mounting pad.

ALL MODELS




DO NOT use the model information from the EPA label.

GL6500

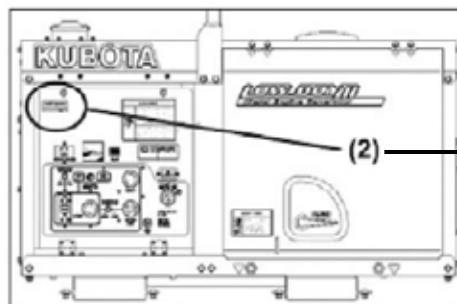

Note Generators also have corresponding engine serial numbers.

GL7000 & GL11000

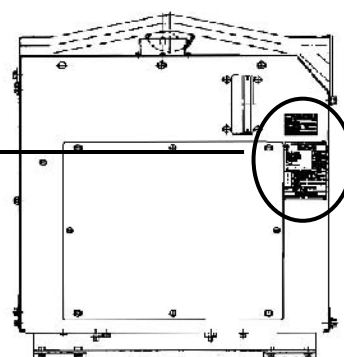

Workshop Manuals

MODEL	FORMER CODE	NEW CODE	DOCUMENT	LANGUAGE
Mechanism Engine	97897-01873	9Y021-01873	WSM	ENGLISH
	97897-02111	9Y021-02111	WSM	FRENCH
Electronic Governor	97897-03010	9Y021-03010	WSM	ENGLISH
WG600-B	97897-00433	9Y0200433	WSM	ENGLISH
WG750-B, WG750-E DG750, DF750-E	97897-00643	9Y021-00643	WSM	ENGLISH
WG1005, DF1005	97897-01971	9Y021-02101	WSM	ENGLISH
	97897-02010	9Y021-01990	WSM	FRENCH
WG752-E2, DF752-E2	97897-02101	9Y021-02101	WSM	ENGLISH
	97897-01990	9Y021-01990	WSM	FRENCH
WG972-E2, DF972-E2	97897-02672	9Y021-02672	WSM	ENGLISH
	97897-02681	9Y021-02681	WSM	FRENCH
68mm Stroke Series (NSM)	97897-02401	9Y021-02401	WSM	ENGLISH
68mm Stroke Series (NSM)	97897-02411	9Y021-02411	WSM	FRENCH
Z602-E, D902-E	97897-02182	9Y021-02182	WSM	ENGLISH
	97897-02360	9Y021-02360	WSM	FRENCH
SM-E2B Series	97897-03173	9Y021-03173	WSM	ENGLISH
	97897-03251	9Y021-03251	WSM	FRENCH
05 Series	97897-02432	9Y021-02432	WSM	ENGLISH
	97897-02441	9Y021-02441	WSM	FRENCH
05-E2B Series 05-T-E2B Series	97897-02752	9Y021-02752	WSM	ENGLISH
05-E2B Series 05-T-E2B Series	97897-02760	9Y021-02760	WSM	FRENCH
92.44mm Stroke Series (03 Series)	97897-02460	9Y021-02460	WSM	ENGLISH
	97897-02470	9Y021-02470	WSM	FRENCH
03M-E2B Series	97897-02813	9Y021-02813	WSM	ENGLISH
	97897-02820	9Y021-02820	WSM	FRENCH
03M-DI-E2B Series	97897-02862	9Y021-02862	WSM	ENGLISH
	97897-02871	9Y021-02871	WSM	FRENCH
03M Series	97897-02132	9Y021-02132	WSM	ENGLISH
	97897-02201	9Y021-02201	WSM	FRENCH
03M-DI Series	97897-02152	9Y021-02152	WSM	ENGLISH
	97897-02550	9Y021-02550	WSM	FRENCH
V2003-T-B, F2503-T-B	97897-01670	9Y021-03060	WSM	ENGLISH
	97897-03071	9Y021-03071	WSM	FRENCH
03-E2B Series	97897-03091	9Y021-03091	WSM	ENGLISH
	97897-03101	9Y021-03101	WSM	FRENCH

[more...](#)

Workshop Manuals (continued)

MODEL	FORMER CODE	NEW CODE	DOCUMENT	LANGUAGE
V3300DI-B, V3300DI-TB	97897-02264	9Y021-02264	WSM	ENGLISH
V3300-B, V3300-TB	97897-02295	9Y021-02295	WSM	ENGLISH
V3300-B, V3300-TB	97897-02302	9Y021-02302	WSM	FRENCH
V3800DI-E2B, V3800DI-T-E2B	97897-02702	9Y021-02702	WSM	ENGLISH
V3000-E2B, V3300-T-E2B	97897-02912	9Y021-02912	WSM	ENGLISH
	97897-02921	9Y021-02921	WSM	FRENCH
"V3300DI-E2B V3300DI-T-E2B"	97897-02962	9Y021-02962	WSM	ENGLISH
"V3300DI-E2B V3300DI-T-E2B"	97897-02971	9Y021-02971	WSM	FRENCH
OC60, OC95	97897-00922		WSM	ENGLISH
OC60-E2B, OC95-E2B	97897-03291	9Y021-03291	WSM	ENGLISH
"EA300-E2-NB1 EA300-E2-NB1-APU EL300-E2-AR EL300-E2-AR-KCL"	97897-03300	9Y021-03300	WSM	ENGLISH
GL7000, GL11000	97897-03400	9Y021-03400	WSM	ENGLISH
SQ SERIES (FOR CANADA)	97897-01980	9Y021-01980	WSM	ENGLISH
GH SERIES	97897-01030		WSM	ENGLISH
GS SERIES	97897-00700		WSM	ENGLISH
70 MM SERIES	97897-00625		WSM	ENGLISH
70 MM SERIES		9Y121-00700	WSM	FRENCH
82 MM SERIES	97897-01095		WSM	ENGLISH
82 MM OLD SERIES	97897-00661		WSM	ENGLISH
125 MM SERIES	97897-01110		WSM	ENGLISH
S2800	97897-00772		WSM	ENGLISH
CD NSM SERIES	97897-01780		WSM	ENGLISH
CD 05 SERIES	97897-01790		WSM	ENGLISH
CD 03 SERIES	97897-01800		WSM	ENGLISH
CD V3300	97897-01810		WSM	ENGLISH
CD D782	97897-01820		WSM	ENGLISH

[more...](#)

Flat Rate Schudules

MODEL	FORMER CODE	NEW CODE	DOCUMENT	LANGUAGE
WG600-B, WG750-B, WG750-E, WG752-E, DG750-E, DF750-E, DF752-E2	97897-20292	9Y022-20292	FRS	E, F, D
WG1005, DF1005	97897-20771	9Y022-20771	FRS	E, F, D
WG972-E2, DF972-E2	97897-20831	9Y022-20831	FRS	E, F, D
SM-E2B SERIES	97897-20931	9Y022-20931	FRS	E, F, D
Z602-E, D902-E	97897-20811	9Y022-20811	FRS	E, F, D
05-E2B , 05-E2BG SERIES	97897-20851	9Y022-20851	FRS	E, F, D
03M SERIES, 03M -DI SERIES	97897-20750	9Y022-20750	FRS	E, F, D
03M-E2B, 03M-DI-E2B SERIES	97897-20870	9Y022-20870	FRS	E, F, D
03-E2B, 03-T-E2B SERIES	97897-20910	9Y022-20910	FRS	E, F, D
V3300-E2B, V3300-T- E2B, V3300DI-E2B, V3300DI-T-E2B, V3800DI-E2B, V3800-DI-T-E2B	97897-20891	9Y022-20891	FRS	E, F, D
V3300-B, V3300DI-TB	97897-20790	9Y022-20790	FRS	E, F, D
V3007-DI-E2B, V3007-DI-E2B	97897-21000	9Y022-21000	FRS	E, F, D
GL7000, GL11000	97897-20840	9Y022-20840	FRS	E,S

Note: **E** - English, **F** - French, **D** - German

This page has been left blank intentionally.

This page has been left blank intentionally.

This page has been left blank intentionally.

Section 2 - Filters

Standard Kubota Filters [2-1](#)

Standard Kubota Filters Images [2-5](#)

Standard Kubota Filters

MODEL		AIR FILTERS		FUEL FILTERS		OIL FILTERS		
SERIES	SPECIFIC	JAPAN	DOMESTIC	JAPAN	DOMESTIC	JAPAN	DOMESTIC	
NSM New Super Mini	Z402	N/A	NONE	15231-43560	NONE	15853-32430	70000-32050	
	Z482	19167-11080 MC	70000-11221 MC					
		1G659-11220 PC	1G659-11222 PC					
	RADIAL SEAL	K1211-82320						
	Z602	19167-11080 MC	70000-11221 MC					
		1G659-11220 PC	1G659-11222 PC					
	D662	19167-11080 MC	70000-11221 MC					
		1G659-11220 PC	1G659-11222 PC					
	D772	19167-11080 MC	70000-11221 MC					
		1G659-11220 PC	1G659-11222 PC					
	D772T [TURBO]	N/A	NONE					
	D782	1G347-11180	NONE			15853-32430	Use Japan	
D902	19167-11080 MC	70000-11221 MC	19167-11080 MC	70000-11221 MC				
	72000-01074	1G659-11222 PC	1G659-11220 PC	1G659-11222 PC				
Older Super Mini	Z400	19176-11080	70000-11221	15231-43560	NONE	15853-32430	NONE	
	D600							
	D640							
	V800							
70 mm	Z500	N/A	NONE	NONE	70000-34500	15241-32090	70000-32050	
	Z600	19176-11080	70000-11221					
	ZH600							
	D750							
	D850							
	DH850							
	D950							
	V1100	NONE	70000-11081					
	VH1100							
	V1200							
82 mm	S2200	N/A	NONE	70000-34500	70000-34500	15521-32430	15521-32430	
	S2600	15606-11080	70000-11080					
	S2800	15621-11180 I	NONE					
		15621-11210 O						

Note: **I** Inner Filter **O** Outer Filter **MC** Metal Canister **PC** Plastic Canister

[more...](#)

Standard Kubota Filters

MODEL		AIR FILTERS		FUEL FILTERS		OIL FILTERS			
SERIES	SPECIFIC	JAPAN	DOMESTIC	JAPAN	DOMESTIC	JAPAN	DOMESTIC		
02 Series	D1102	USE DOMESTIC	70000-11081	NONE	NONE	16414-32430 OR 15521-32430 OR 17321-34430	15521-32430		
	D1302 [D1301]								
	D1402								
	V1502 [V1501]								
	V1702 [V1701]	15606-11080	70000-11080	15601-43170	70000-43170				
	V1902								
	F2302DI								
03 Series	D1403	15401-11080	70000-11081	16631-43560	16631-43560	16414-32430	15521-34230		
	D1503								
	D1703 [M, M-DI]								
	D1803 [D-DI]								
	V1903	15606-11080	70000-11080					15601-43170	70000-43170
	V2003 (M, MT)								
	V2203DI								
	V2203 (m)								
	V2403 [M, M-DI]								
	F2503T								
	F2803								
05 Series	D905	15741-11083	15741-11080	15221-43170	70000-43081	16271-32393	70000-32050		
	D1005								
	D1105								
	D1105T	17351-11083	17351-11083				16271-32093		
	V1205	15741-11083	15741-11080						
	V1305								
	V1505								
	V1505T	17351-11083	17351-11083						
V3	V3300 (DI)	P827653 O	P827653 O	16631-43560	NONE	1C020-32430	NONE		
		P829332 I	P829332 I						
	V3300 (T, DIT)	P828889 O	P828889 O						
		P829333 I	P829333 I						
	V3800 DI	P887653 O	P887653						
		P829332 I	P829332 I						
	V3800 DIT	P828889 O	P828889 O						
		P829333 I	P829333 I						

Note: **I** Inner Filter **O** Outer Filter **MC** Metal Canister **PC** Plastic Canister

[more...](#)

Standard Kubota Filters

MODEL		AIR FILTERS		FUEL FILTERS		OIL FILTERS				
SERIES	SPECIFIC	JAPAN	DOMESTIC	JAPAN	DOMESTIC	JAPAN	DOMESTIC			
WG DF DG	WG600	19167-11080	70000-11221	12581-43012 [In-Line Filter]	NONE	15853-32430	70000-32050			
	WG750									
	WG752	19167-11080 MC	70000-11221 MC					15241-32090		
		1G659-11220 PC	1G659-11222 PC							
	WG972	1G659-11220	1G659-11222			15853-32430				
	WG1005	15741-11083	15741-11080					15241-32090		
	DF750	19167-11080	70000-11221						15853-32430	
	DF752	19167-11080 MC	70000-11221 MC					15241-32090		
		1G659-11220 PC	1G659-11222 PC							
	DF972	1G659-11220	1G659-11222			15853-32430				
	DF1005	15741-11083	15741-11080							
DG750	19167-11080	70000-11221								
Horizontal	ZB400	See Parts Catalog	NONE	15231-43560	NONE	14952-32110	NONE			
	ZB500					15241-32090				
	ZB600	19215-11220	NONE			14911-32110				
	EA/EB200-300	14971-11180	NONE	See Parts Catalog	NONE	14911-32110				
	EL300									
	EA400-600	14348-11180	NONE	15231-43560	NONE	19164-32010	NONE			
	RK301-401	14971-11180	NONE							
	RK451-601	14348-11180	NONE							
OC/AC	AC60	11420-11180	NONE	11420-43012T	NONE	14911-32110	NONE			
	OC60			11460-43012T	NONE					
	OC80									
	OC95									
GL Series	GL3500	13415-11080	NONE	15231-43560	NONE	SEE NOTE 2	NONE			
	GL4500	15852-11080				15241-32090				
	GL4500S	13415-11080				SEE NOTE 2				
	GL5500	15852-11080				15241-32090		NONE		
	GL5500S									
	GL6500S >795553	67980-82630				N/A		NONE	15241-32090	70000-32050
	GL6500S <795553	SEE NOTE 1								
	GL6000	N/A								
	GL7000	6C060-99410 ^o		15231-43560	NONE		15241-32090			
		32721-58242 ⁱ		N/A	NONE		N/A			
	GL9000	N/A								
	GL11000	6C010-99410 ^o		15231-43560	NONE	15241-32090				
32721-58242 ⁱ										

Note: **I** Inner Filter **O** Outer Filter **MC** Metal Canister **PC** Plastic Canister

[more...](#)

Standard Kubota Filters

MODEL		AIR FILTERS		FUEL FILTERS		OIL FILTERS	
SERIES	SPECIFIC	JAPAN	DOMESTIC	JAPAN	DOMESTIC	JAPAN	DOMESTIC
KJ-X 60 Hertz	KJ-S150VX	15741-11083	15741-11080	15221-43170	70000-43081	16414-32430	
	KJ-S200FX					15402-32430	15402-32430
	KJ-T160DX					16414-34430	
	KJ-T210VX					15402-32430	15402-32430
	KJ-T270FX						
	KJ-S130DX-USA					16414-32430	
	KJ-S150VX-USA						
	KJ-T210-VX-USA						
	KJ-T270-SW-USA					15402-32430	15402-32430
SQ 60 Hertz	SQ-1140	17351-11083	NONE	15521-43160 ^A	NONE	16414-32430	15521-32430
				RB101-51280 ^B			
	SQ-1200			15521-43160 ^A			
				RB101-51280 ^B			
	SQ-3170			15521-43160 ^A			
				RB101-51280 ^B			
	SQ-3250			15521-43160 ^A			
				RB101-51280 ^B			
	SQ-3350	59800-26110 ^O		16631-43560 ^A		1C020-32430	NONE
		3A111-19130 ^I		RB101-51280 ^B			

- 1)** Use 15852-11080 For Serial <= 783565 & Use 16853-11220 for serial between 783565 and 795553
2) Integral type; refer to parts catalog
O) Outer filter
I) Inner filter
A) Main filter [after fuel pump]
B) Water separator filter [before fuel pump]
PC) Plastic canister housing
MC) Metal canister housing

Standard Kubota Filters

[Click here to enlarge](#)

11420-11180 AIR FILTER



APPLICATION

AC/OC

[Click here to enlarge](#)

13415-11080 AIR FILTER



APPLICATION

GL 4500S

[Click here to enlarge](#)

14348-11180 AIR FILTER



APPLICATION

EA 400-600

[Click here to enlarge](#)

14971-11180 AIR FILTER



APPLICATION

EA/EB/EL

[Click here to enlarge](#)

15621-11180 AIR FILTER



APPLICATION

S2800

[Click here to enlarge](#)

15621-11210 AIR FILTER



APPLICATION

Standard Kubota Filters

[Click here to enlarge](#)

15852-11082 AIR FILTER




APPLICATION

GL4500S

[Click here to enlarge](#)

15741-11080 AIR FILTER

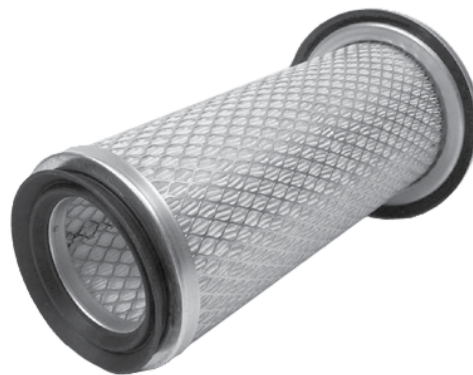

APPLICATION

05 SERIES, WG/DF 1005

[Click here to enlarge](#)

16853-11220 AIR FILTER



APPLICATION

GL 6500S

[Click here to enlarge](#)

17351-11083 AIR FILTER



APPLICATION

SQ 1140,1200, GENERATORS

[Click here to enlarge](#)

19167-11080 AIR FILTER



APPLICATION

OLD SM, NEW SM, 70 MM SERIES, WG/DF

[Click here to enlarge](#)

76611-58420 AIR FILTER



APPLICATION

ZB 600

Standard Kubota Filters

[Click here to enlarge](#)

59800-26110 AIR FILTER



APPLICATION

SQ 3250,3350

[Click here to enlarge](#)

67980-82630 AIR FILTER



APPLICATION

GL 6500S, (~795553)

[Click here to enlarge](#)

70000-11080 AIR FILTER



APPLICATION

02 SERIES, 03 SERIES

[Click here to enlarge](#)

70000-11081 AIR FILTER



APPLICATION

02 SERIES, 03 SERIES

[Click here to enlarge](#)

1G659-11220 AIR FILTER



APPLICATION

NEW SM, WG/DF

[Click here to enlarge](#)

3A111-19130 AIR FILTER



APPLICATION

SQ 3250/3350, INNER FILTER

Standard Kubota Filters

[Click here to enlarge](#)

6C060-99410 AIR FILTER



APPLICATION

GL 7000/11000

[Click here to enlarge](#)

32721-58242 AIR FILTER



APPLICATION

GL 7000/ 11000

[Click here to enlarge](#)

70000-11221 AIR FILTER



APPLICATION

OLD SM, NEW SM, 70 MM SERIES, WG/DF

[Click here to enlarge](#)

70000-43080 FUEL FILTER



APPLICATION

NEW SM, WG/DF

[Click here to enlarge](#)

15231-43560 FUEL FILTER



APPLICATION

OLD SM, NEW SM, ZB,EA,EB, GL SERIES, PACKAGE OF 12

[Click here to enlarge](#)

11420-43012 FUEL FILTER



APPLICATION

AC/ OC

Standard Kubota Filters

[Click here to enlarge](#)

70000-34500 FUEL FILTER



APPLICATION

70 mm, 82 mm, F2803, F3202 DI

[Click here to enlarge](#)

16631-43560 FUEL FILTER



APPLICATION

03 SERIES, V3300, V3800, SQ-3350

[Click here to enlarge](#)

15521-43160 FUEL FILTER



APPLICATION

SQ SERIES

[Click here to enlarge](#)

13901-41350 FUEL FILTER



APPLICATION

AC/OC, FUEL TANK STRAINER

[Click here to enlarge](#)

15521-32430 FUEL FILTER



APPLICATION

02 SERIES, 03 SERIES, SQ SERIES

[Click here to enlarge](#)

13351-43010 FUEL FILTER



APPLICATION

IN LINE

Standard Kubota Filters

[Click here to enlarge](#)

RB101-51280 FUEL FILTER



APPLICATION

SQ SERIES

[Click here to enlarge](#)

16631-43560 FUEL FILTER



APPLICATION

OLD SM, NEW SM, WG/DF 750, WG/DF 752

[Click here to enlarge](#)

16271-32092 OIL FILTER



APPLICATION

05 SERIES

[Click here to enlarge](#)

19164-32010 OIL FILTER



APPLICATION

EA/RK, L=144mm

[Click here to enlarge](#)

15241-32090 OIL FILTER



APPLICATION

70mm, WG/DF 1005, ZB500/ZB600, GL 6500, GL 7000, GL 11000

[Click here to enlarge](#)

1C020-32430 OIL FILTER



APPLICATION

V3300, V3800, SQ SERIES

Standard Kubota Filters

[Click here to enlarge](#)

70000-32090 OIL FILTER



APPLICATION

82 MM, F2302DI, F2803

[Click here to enlarge](#)

15853-32430 OIL FILTER



APPLICATION

OLD SM, NEW SM, WG/DF 750, WG/DF 752

[Click here to enlarge](#)

14911-32110 OIL FILTER



APPLICATION

EA/EB/EL, AC/OC, L=135 mm

[Click here to enlarge](#)

14952-32110 OIL FILTER



APPLICATION

ZB 400, L=185 mm

Section 3 - Metal Kits

Typical Page

[3-1](#)

Metal Kits

[3-2](#)

Typical Page (Metal Kits)


MODEL			KIT PART NUMBER			
SERIES	BASE	SPECIFIC	STANDARD	(-0.2 MM)	(-0.4 MM)	NOTES
OLD SM 62.2 mm	Z400	Z400	07916-28150	NONE	NONE	ALL
	STEP 1	D600	07916-28130	STEP 2	NONE	ALL
		D640	07916-28130		NONE	
		V800	07916-28700		NONE	ALL
NSM 68 mm	Z402	NONE				
	Z482	Z482	07916-29190	1G957-23760	1G957-23770	ALL
	Z602	D602	1G460-23752	1G460-23762	1G460-23770	STEP 3
	D662	D662	07916-28210	16871-23770	16871-23770	
	D722	D722				
		D722-T	NONE			
	D782	D782	1E051-23752	1E051-23760	1E051-23770	ALL
	D902	D902	1G962-23752	1G962-23762	1G962-23772	ALL

STEP 1 - Look up the model under the base engine eg: Z482

STEP 2 - Select the kit part number from the standard or undersize columns eg: -0.2 mm

STEP 3 - Refer to notes column for special information or serial number breaks.

[Metal Kits >>](#)

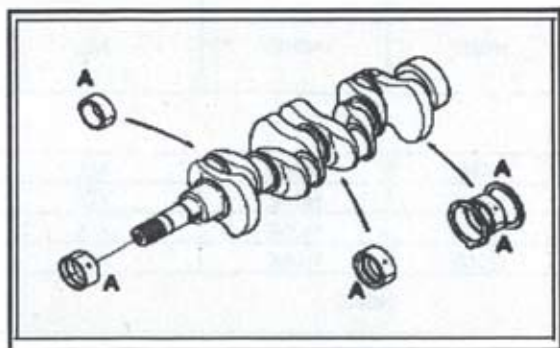

METAL KITS CONTENTS ALL A ITEMS

Crankpin,
Crankshaft Front Main,
Crankshaft Mains,
Crankshaft Side (Thrusts Top & Bottom)

Metal Kits

MODEL			KIT PART NUMBER			
SERIES	BASE	SPECIFIC	STANDARD	(-0.2 MM)	(-0.4 MM)	NOTES
OLD SM 62.2 mm	Z400	Z400	07916-28150	NONE	NONE	ALL
	D600	D600	07916-28130	NONE	NONE	ALL
	D640	D640	07916-28130	NONE		
	V800	V800	07916-28700	NONE	NONE	ALL
NSM 68 mm	Z402	Z402	NONE			
	Z482	Z482	1E051-23752	1E051-23760	1E051-23770	ALL
	Z602	Z602	1G962-23752	1G962-23762	1G962-23772	ALL
	D662	D662	07916-28210	16871-23770	16871-23770	ALL
	D722	D722				
		D722-T	NONE			
	D782	D782	1E051-23752	1E051-23760	1E051-23770	ALL
	D902	D902	1G962-23752	1G962-23762	1G962-23772	ALL
70 mm	Z500	Z500	07916-28200	NONE	NONE	ALL
	Z600	Z600				
	ZH600	ZH600				
	D750	D750	07916-28090	NONE	NONE	ALL
	D850	D850	07916-28090	NONE	NONE	ALL
		DH850				
	D950	D950	07916-28140	NONE	NONE	ALL
	V1100	V1100				
	VH1100					
V1200	V1200					
82 mm	S2200	S2200	NONE			
	S2600	S2600				
	S2800	S2800	07916-28160	NONE	NONE	ALL
115 mm	D3200	D3200	07916-28170	NONE	NONE	ALL
	V4300	V4300	07916-28180	NONE	NONE	ALL
		V4300T	07916-28180	NONE	NONE	ALL
125 mm	D3502	D3502	NONE			
	V4702	V4702				
02 Series	Z751	Z751	NONE			
	Z851	Z851				
	D1102	D1102				
	D1302	D1302				
	D1402	D1402	07916-28110	NONE	NONE	ALL
	V1502	V1502	NONE			
	V1702	V1702	07916-28120	NONE	NONE	ALL
	V1902	V1902	07916-28120	NONE	NONE	ALL
	F2802DI	F280DI	07916-28220	NONE	NONE	ALL

Metal Kits (continued)

MODEL			KIT PART NUMBER			
SERIES	BASE	SPECIFIC	STANDARD	(-0.2 MM)	(-0.4 MM)	NOTES
03 Series	D1403	D1403	07916-28070	07916-28722	07916-28732	ALL**
		D1403-E2B	1G842-23750	1G842-23760	1G842-23770	3S0001~
	D1503	D1503M-E2B	1G842-23750	1G842-23760	1G842-23770	3S0001~
	D1703	D1703	07916-28070	07916-28722	07916-28732	ALL**
		D1703M				
		D1703MDI				
		D1703-E2B	1G842-23750	1G842-23760	1G842-23770	3S0001~
		D1703M-E2B				
		D1703MDI-E2B				
	D1803	D1803M-E2B	1G842-23750	1G842-23760	1G842-23770	3S0001~
	V1903	V1903	07916-28000	07196-23740	07916-28752	ALL**
		V1903-E2B	1G842-23750	1G842-23760	1G842-23770	3S0001~
	V2003	V203T	07916-28000	07916-28740	07916-28750	ALL**
		V2003M				
		V2003MT				
		V2003T-E2B	1G856-23750	1G856-23760	1G856-23770	3S0001~
		V2003M-E2B				
		V2003MT-E2B				
		V2003MDIT-E2B				
	V2203	V2203	07916-28000	07916-28740	07916-28752	ALL**
		V2203M				
		V2203DI				
		V2203-E2B	1G856-23750	1G856-23760	1G23770	3S0001~
		V2203M-E2B				
		V2203MDI-E2B				
	V2403	V2403M-E2B	1G856-23750	1G856-23760	1G856-23770	3S0001~
		V2403MDI-E2B				
	F2803	F2803	07916-28780	07916-28790	07916-2880	ALL
05 Series	D905	D905	07916-28240	07916-28760	07916-28770	ALL
	D1005	D1005	07916-28240	07916-28760	07916-28770	ALL
	D1105	D1105	07916-28240	07916-28760	07916-28770	ALL
		D1105T	NONE			
		D1105T-E2B	1G995-23750	1G993-23760	1G993-23770	3S0001~
	V1205	V1205	07916-28710	07916-28920	07916-28930	ALL
	V1305	V1305	07916-28710	07916-28920	07916-28930	ALL
	V1505	V1505	07916-28710	07916-28920	07916-28930	ALL
		V1505T	NONE			
		V1505T-E2B	1G992-23750	1G992-23760	1G992-23770	ALL

[more...](#)

Metal Kits (continued)

MODEL			KIT PART NUMBER			
SERIES	BASE	SPECIFIC	STANDARD	(-0.2 MM)	(-0.4 MM)	NOTES
V3300	V3300	V3300	07916-28940	07916-28952	07916-28962	ALL
		V3300T				
		V3300-E2B				
		V3300T-E2B				
V3300DI	V3300DI	V3300DI-E2B				
		V3300DIT-E2B				
V3800DI	V3800DI	V3800DI-E2B				
		V3800DIT-E2B				
WG	WG	WG600	07916-28130	NONE	NONE	NONE
		WG750	EG601-23750	EG601-23760	EG601-23770	ALL
		WG752-E2	EG601-23750	EG601-23760	EG601-23770	ALL
		WG972-E2	1G962-23752	1G962-23762	1G962-23772	ALL
		WG1005	07916-28240	07916-28760	07916-28770	ALL
DF	DF	DF750	EG601-23750	EG601-23760	EG601-23770	ALL
		DF752-E2	EG601-23750	EG601-23760	EG601-23770	ALL
		DF972-E2	1G962-23752	1G962-23762	1G962-23772	ALL
		DF1005	EG601-23750	EG601-23760	EG601-23770	ALL
DG	DG750	DG750	07916-28240	07916-28760	07916-28770	ALL
Horizontal	ZB	ZB400	NONE			
		ZB500	NONE			
		ZB600-C	07916-28100	NONE	NONE	ALL
	EA/EB/EL	ALL	NONE			
	RK	ALL	NONE			
OC/AC	OC/AC	AC60	NONE			
		OC60-D1-Q,G,D				
		OC60-G1-R				
		OC60-D1-R1				
		OC60-G-EC-Q-EC				
		OC95-D1/G1				
GS/GH	ALL	ALL				

NOTE** These kits are for earlier produced engines (3S0001). These models had a 52 mm diameter crankshaft journal. Some late models may have larger 60 mm diameter crankshafts journal. Please check diameter for journal before ordering. If larger order from "E2B" models.

This page has been left blank intentionally.

Section 4 - Piston Kits

Typical Page

[4-1](#)

Piston kits

[4-2](#)

Typical Page (Piston Kits)

MODEL				KIT PART NUMBER			
SERIES	BASE	SPECIFIC	STANDARD	OVERSIZE	REQ QTY	OS	NOTES
Super Mini	Z400	Z400	07916-28250	07916-28390	2	.5 mm	STEP 3
		D600			3	.5 mm	
	STEP 1	D640	STEP 2	07916-28410	3	.5 mm	
		V800		07916-28390	4	.5 mm	
NSM New Super Mini		Z402		NONE			
		Z482	07916-28460	07916-28470	2	.25 mm	COMPLETE
	Z482	Z482	16853-21000	NONE	2	STAND	PISTON, RINGS, CIR CLIPS
	Z602	Z602	1G460-21002	1G690-21780	2	.25 mm	INCLUDES HEAD GASKET
	D662	D662	07916-28440	07916-28450	3	.25 mm	ALL
	D722	D722	07916-28460	07916-28470	3	.25 mm	COMPLETE
		D722	16873-21000	NONE	3	.25 mm	~5T9999 =
		D722	16873-21002	NONE	3	.25 mm	5U000/1~ =
		D722T	NONE				
	D782	D782	1E051-21770	1E051-21780	3	.25 mm	~4D1132
		D782	1E051-21772	1E051-21782	3	.25 mm	4E000/4 ~
	D902	D902	1G960-21002	1G960-21780	3	.25 mm	INCLUDES HEAD GASKET

STEP 1 - Look up specific model in the kit index section eg: Z482

[Piston Kits >>](#)



STEP 2 - Select the part number from the standard or oversize columns eg: Stand

STEP 3 - Refer to notes column for special information or serial number breaks

PISTON & RING KITS CONTENTS INCLUDE ALL THE A ITEMS :

Ring Set, Piston, Piston Pin, CIR-Clips,
Piston Pin Bushing

Important: Kubota piston use a key stone top ring. The ring is labelled with a letter for the top side if it will not fit in the groove if installed upside down. If a customer inquires that a top ring does not fit or is too small, please first ask the customer to check the orientation of the ring.

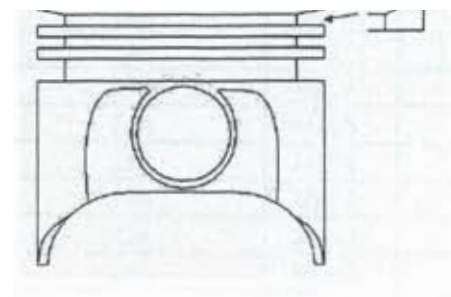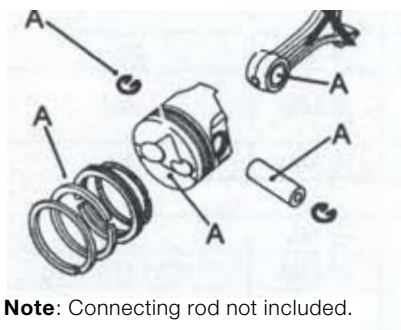

Piston Kits

MODEL				KIT PART NUMBER			
SERIES	BASE	SPECIFIC	STANDARD	OVERSIZE	REQ QTY	OS	NOTES
Super Mini	Z400	Z400	07916-28250	07916-28390	2	.5 mm	ALL
	D600	D600			3	.5mm	
	D640	D640	07916-28400	07916-28410	3	.5 mm	
	V800	V800	07916-28250	07916-28390	4	.5 mm	
NSM New Super Mini	Z402	Z402	NONE				
	Z482	Z482	07916-28460	07916-28470	2	.25 mm	COMPLETE
		Z482	16853-21000	NONE	2	STAND	PISTON, RINGS, CIR CLIPS
	Z602	Z602	1G460-21002	1G690-21780	2	.25 mm	INCLUDES HEAD GASKET
	D662	D662	07916-28440	07916-28450	3	.25 mm	ALL
	D722	D722	07916-28460	07916-28470	3	.25 mm	COMPLETE
		D722	16873-21000	NONE	3	.25 mm	~5T9999 ‡
		D722	16873-21002	NONE	3	.25 mm	5U0001~ ‡
		D722T	NONE				
	D782	D782	1E051-21770	1E051-21780	3	.25 mm	~4D1132
		D782	1E051-21772	1E051-21782	3	.25 mm	4E0001~ ^
	D902	D902	1G960-21002	1G960-21780	3	.25 mm	INCLUDES HEAD GASKET
70 mm	Z500	Z500	NONE				
	Z600	Z600	07916-28260	07916-28480	2	.5 mm	ALL
	ZH600	ZH600					
	D750	D750	07916-26520	07916-26530	3	.5 mm	ALL
	D850	D850	07916-28260	07916-28480	3	.5 mm	ALL
		DH850					
	D950	D950	07916-26560	07916-26570	3	.5 mm	ALL
	V1100	V1100	07916-28260	07916-28480	4	.5 mm	ALL
		VH1100					
V1200	V1200	07916-26560	07916-26570	4	.5 mm	ALL	
82 mm	S2200	S2200	NONE				
	S2600	S2600	07916-26630	07916-26640	6	.5 mm	ALL
	S2800	S2800	07916-28340	07916-27000	3	.5 mm	CYLS 1,2 & 6
			07916-28350	07916-27010	3	.5 mm	CYLS 3,4 & 5
115 mm	D3200DI	D320DI	07916-28370	07916-26640	3	.2 mm	ALL
				07916-27000	3	.4 mm	ALL
				07916-27070	3	.6 mm	ALL
125 mm	D3502DI V4702DI	D3502DI V4702DI	07916-27100	07916-27050	3	.2 mm	ALL
				07916-27060	3	.4 mm	ALL
				07916-27070	3	.6 mm	ALL

‡ Not Interchangeable ^ New for Old

[more...](#)

Piston Kits (continued)

[...continued](#)

MODEL				KIT PART NUMBER				
SERIES	BASE	SPECIFIC	STANDARD	OVERSIZE	REQ QTY	OS	NOTES	
02 Series	DH1101	DH1101	07916-26580	NONE	3	.5 mm	ALL	
	D1102	D1102	07916-26590	07916-26600	3	.5 mm	ALL	
	D1302	D1302	07916-26650	07916-26640	3	.5 mm	ALL	
	D1501	D1501	07916-26580	NONE	4	.5 mm	ALL	
	D1402	D1402	07916-28310	07916-26690	2	.5 mm	CYLS 1 & 3	
			07916-28320	07916-26700	2	.5 mm	CYL 2	
	V1501 V1502	V1501 V1502	07916-26590	07916-26600	4	.5 mm	ALL	
02 Series	V1071 V1702	V1071 V1702	07916-26780	07916-26750	4	.5 mm	ALL	
	V1902	V1902	07916-28310	07916-26690	2	.5 mm	CYLS 1 & 4	
			07916-28320	07916-26700	2	.5 mm	CYLS 2 & 3	
	F2302DI	F2302DI	07916-26960	07916-26970	5	.5 mm	ALL	
03 Series	D1403	D1403	07916-27660	07916-27670	3	.5 mm	ALL	
	D1503	D1503	07916-27642	07916-27652	3	.5 mm		
		D1503M	1G726-21772	1G755-21782	2	.25 mm	ALL	
		D1503M-E2B						
	D1703	D1703	07916-26940	07916-26950	3	.5 mm	ALL	
		D1703-E2B	16404-21772	1G755-21782	3	.25 mm	~3Z1998	
		D1703M	1G856-21772	1G755-21782	3	.25 mm		
		D1703M-E2B					4A0001~	
		D1703MDI	NONE					
		D1703MDI-E2B						
		D1803	D1803M	1G805-21770	1G805-21780	3	.25 mm	
	D1803M-E2B		4A0001~					
	V1903	V1903	07916-27660	07916-27670	4	.5 mm	~3Z1998	
		V1903-E2B	1G427-21770	1G427-21780	3	.5 mm	4A0001	
	V2003	V2003T	NONE					
		V2003M-E2B	1G726-21772	1G726-21782	4	.25 mm	ALL	
		V2003MT-E2B	1G468-21770	1G468-21780	4	.25 mm	ALL	
		V2003MDIT-E2B	1G488-21770	1G488-21780	4	.25 mm	ALL	
	V2403	V2403M-E2B	1G856-21770	1G856-21772	4	.25 mm	4A0001~	
		V2403MDI-E2B	1G486-21770	1G486-21780	4	.25 mm	~5U0001	
	F2803	F2803	07916-26660	07916-26790	5	.5 mm	ALL	
		F2803-DI	07916-20900	07916-26910	5	.5 mm	ALL	
		F2803-T	NONE					

‡ Not Interchangeable ▲ New for Old

[more...](#)

Piston Kits (continued)

...continued

MODEL				KIT PART NUMBER			
SERIES	BASE	SPECIFIC	STANDARD	OVERSIZE	REQ QTY	OS	NOTES
O5 Series	D905	D905	07916-26800	07916-26810	3	.5 mm	ALL
	D1005	D1005	07916-26842	07916-26852	3	.5 mm	ALL
	D1105	D1105	1G069-21773	1G069-21793	3	.5 mm	ALL
		D1105T	1G993-21770	1G995-21790	3	.5 mm	ALL
	V1205	V1205	07916-26800	07916-26810	4	.5 mm	ALL
		V1205T	07916-26820	07916-26830	4	.5 mm	ALL
	V1305	V1305	07916-26842	07916-26852	4	.5 mm	ALL
	V1505	V1505	1G069-21773	1G069-21793	4	.5 mm	ALL
V1505T		1G993-21770	1G995-21790	4	.5 mm	ALL	
V3 Series	V3300	V3300	07916-28970	07916-28980	4	.5 mm	~YY0471
		V3300T	07916-28990	07916-24812	4	.5 mm	~YY0471
		V3300	1G533-21770	1G533-21790	4	.5 mm	YY0471~
		V3300T	1G563-21770	1G563-21790	4	.5 mm	YY0471~
V38	V3800DI	V3800DI-E2B	1G539-21770	1G539-21790	4	.5 mm	4A0001~
		V3800DIT-E2B	1G549-21770	1G549-21790	4	.5 mm	4A0001~
WG DF DG	WG	WG600	07916-27080	07916-27090	3	.5 mm	ALL
		WG750	07916-27140	07916-27150		.5 mm	ALL
		WG752-E2	EG601-21770	EG601-21780		.5 mm	ALL
		WG972-E2	EG561-21770	EG561-21780		.5 mm	ALL
		WG1005	NONE				
	DF	DF750	07916-27140	07916-27150		.5 mm	ALL
		DF752-E2	EG601-21770	EG601-21780		.5 mm	ALL
		DF972-E2	EG511-21770	EG561-21780		.5 mm	ALL
		DF1005	NONE				
		DF750	07916-27140	07916-27140		.5 mm	ALL
DF972		NONE					
Horizontal	ZB	ZB400	07916-28420	07916-27150		.5 mm	ALL
		ZB500				.5 mm	ALL
		ZB600-C	07916-28260	07916-28480		.5 mm	ALL
	EA/EB/EL	ALL	NONE				
	RK	ALL					
	OC/AC	OC/AC	AC60	07916-27160	07916-27170	1	.25 mm
OC60-D1Q, G, D			07916-27180	791627190		.25 mm	ALL
OC60-G1-R							
OC-60-D1-R1			07916-27340	07916-27350		.25 mm	ALL
OC60-G-EC-Q-EC							
OC95-D1/G1			07916-27220	07916-27230		.25 mm	ALL

‡ Not Interchangeable ▲ New for Old

[more...](#)

Piston Kits (continued)

...continued

MODEL				KIT PART NUMBER			
SERIES	BASE	SPECIFIC	STANDARD	OVERSIZE	REQ QTY	OS	NOTES
GS/GH	GS/GH	GS130		13901-21850		.5 mm	ALL
		GS200		12896-21850		.5 mm	ALL
		GS280		13941-21860		.25 mm	ALL
				13961-21860		.5 mm	ALL
		GH120 GH170		12647-21860		.25 mm	ALL
				12647-21850		.5 mm	ALL
		GH250		12627-21860		.25 mm	ALL
				12627-21850		.5 mm	ALL
		GH280		12546-21860		.25 mm	ALL
				12546-21850		.5 mm	ALL
		GH400		12181-21850		.25 mm	ALL
				12181-21862		.50 mm	ALL

‡ Not Interchangeable ^ New for Old

Section 5 - Gasket Kits

Typical Page	5-1
Gasket Kit Index	5-2
Gasket kit Contents	5-6

Typical Page (Gaskets)

MODEL			KIT PART NUMBER			
SERIES	BASE	SPECIFIC	UPPER	NOTES	LOWER	NOTES
NSM	Z402	STEP 1	STEP 2		~	STEP 3
	Z482			~4Y9999	07916-29495	
		Z482-E2B	1G957-99360	5A0001~	1G957-99360	5A0001~
	Z602	Z602	1G460-99352	~4Y9999	1G460-99362	~4Y9999
		Z602-E2B	1G829-99350	5A0001~	1G959-99362	5A0001~
	D662	D662	16863-99353	ALL	16863-99362	ALL
	D722	D722	07916-29477	~4Y9999	07916-29485	~4Y9999
		D722-E2B	1G958-99350	5A0001~	1G957-99360	5A0001~
		D722T	NONE			
	D782	D782	NONE			
	D902	D902-BBS1	1G823-99353	ALL	1G962-99360	ALL
		D902-BBS-1				
		D902-2BBS-1			1G960-99364	ALL
		D902-2BBS-2				

STEP 1 - Find correct engine model number eg: Z602

STEP 2 - Select the kit part number from the upper or lower kit list.

STEP 3 - Refer to notes column for special information or serial number breaks.

Upper Kits Include all gaskets and seals from the cylinder head and up, including the head gasket.

[Gasket Kit Index >>](#)

Lower kits include all gaskets and seals from the cylinder head down to the oil pan, including front gear case.

Gasket Kit Index

MODEL			KIT PART NUMBER			
SERIES	BASE	SPECIFIC	UPPER	NOTES	LOWER	NOTES
NSM	Z402	Z402	~		~	
	Z482	Z482	07916-29435	~4Y9999	07916-29495	~4Y9999
		Z482-E2B	1G957-99350	5A0001~	1G957-99360	5A0001~
	Z602	Z602	1G460-99352	~4Y9999	1G460-99362	~4Y9999
		Z602-E2B	1G829-99350	5A0001~	1G959-99362	5A0001~
	D662	D662	16863-99353	ALL	16863-99362	ALL
	D722	D722	07916-29477	~4Y9999	07916-29485	~4Y9999
		D722-E2B	1G958-99350	5A0001~	1G957-99360	5A0001~
		D722T	NONE			
	D782	D782	NONE			
	D902	D902-BBS1	1G823-99353	ALL	1G962-99360	ALL
		D902-BBS-1			1G960-99364	ALL
		D902-2BBS-1				
		D902-2BBS-2				
SUPER MINI	Z400	Z400	07916-24010	ALL	07916-24010	ALL
	Z430	Z430	07916-24505	ALL	07916-24515	ALL
	D600	D600	07916-24535	ALL	07916-24535	ALL
	D640	D640	07916-29185	ALL	07916-29185	ALL
	V800	V800	07916-29015	ALL	07916-29015	ALL
70 MM	Z500	Z500	07916-24065	ALL	07916-24075	ALL
	Z600	Z600	07916-24565	ALL	07916-29905	ALL
		ZH600	NONE			
	D750	D750	07916-24195	no water pump	07916-29865	ALL
	D850	D850	07916-24405	ALL	07916-29595	ALL
		DH850	07916-24405	ALL	07916-24415	ALL
	D950	D950	07916-24385	ALL	07916-29865	ALL
	V1100	V1100	07916-29305	ALL	07916-29315	ALL
		VH1100	07916-29305	ALL	07916-29315	ALL
	V1200	V1200	07916-29325	ALL	07916-29335	ALL
82MM	S2200	S2200	07916-24445			
	S2600	S2600	07916-24465	ALL	07916-29915	ALL
	S2800	S2800	07916-24485	ALL	07916-24495	ALL
115 MM	D3200	D3200 -DI	07916-24422	ALL	07916-24430	ALL
	V4300	V4300-DI	07916-24325	ALL	07916-24332	ALL
	V4300T	V4300-DI-T	07916-29060	ALL	07916-29070	ALL
125 MM	D3502	D3502-DI	07916-29525	ALL	07916-29530	ALL
	V4702	V4702-DI	07916-29545	ALL	07916-29555	ALL

[more...](#)

Gasket Kit Index

[...continued](#)

MODEL			KIT PART NUMBER			
SERIES	BASE	SPECIFIC	UPPER	NOTES	LOWER	NOTES
82 mm	Z751	Z751	NONE			
	Z851	Z851	NONE			
	D1102	D1102	07916-24345	ALL	07916-29950	ALL
	D1302	D1302	07916-24586	ALL	07916-29640	ALL
	D1402	D1402	07916-24365	ALL	07916-29635	ALL
	V1502	V1502	07916-24280	ALL	07916-29985	ALL
	V1702	V1702	07916-29695	ALL	07916-29705	ALL
	V1902	V1902	07916-24305	ALL	07916-29615	ALL
	F2302-DI	F2802-DI	07916-29765	ALL	07916-29775	ALL
03 Series	D1403	D1403	07916-28885	~ 3Y9999	1G703-99354	~ 3Y9999
		D1403-E2B	1G971-99350	4A0001 ~	1G971-99362	4A0001 ~
	D1503	D1503				
		D1503M				
		D1503M-E2B	1G469-99350	4A0001 ~	1G469-99360	4A0001 ~
	D1703	D1703	07916-27715	~ 3Y9999	07916-27727	~ 3Y9999
	D1703-E2B	D1703-E2B	1G972-99350	4A0001 ~	1G971-99362	4A0001 ~
	D1703M	D1703	1G755-99353	ALL	1G726-99364	ALL
	D1703M-E2B	D1703M-E2B	1G462-99350	4A0001 ~	1G469-99360	4A0001 ~
	1703MDI	1703MDI	NONE			
	1703MDI-E2B	1703MDI-E2B	NONE			
	D1803	D1803M	1G755-99353	ALL	1G726-99364	ALL
	D1803M-E2B	D1803M-E2B	1G462-99350	ALL	1G469-99360	ALL
	V1903	V1903	07916-27736	~ 3Y9999	07916-29515	~ 3Y9999
		V1903-E2B	1G974-99350	4A0001 ~	1G974-99362	4A0001 ~
	V2003	V2003T	NONE			
		V2003T-E2B	1G970-99350	4A0001 ~	1G974-99362	4A0001 ~
		V2003M-E2B	1G464-99350	4A0001 ~	1G464-99360	4A0001 ~
		V2003MT-E2B	1G468-99350	4A0001 ~	1G464-99360	4A0001 ~
		V2003MDIT-E2B	1G488-99350	4A0001 ~	1G485-99360	4A0001 ~
	V2203	V2203	07916-29505	~ 3Y9999	07916-29515	~ 3Y9999
		V2202-DI	07916-29345	~ 3Y9999	07916-29356	~3Y9999
		V2203-DI				
		V2203-E2B	1G975-99353	4A0001 ~		4A0001 ~
		V2203M	1G789-99355	~ 3Y9999	1G799-99463	~ 3Y9999
		V2203M-E2B	1G465-99350	4A0001 ~	1G464-99360	4A0001 ~
		V2203MDI-E2B	1G485-99350	4A0001 ~	1G458-99360	4A0001 ~
	V2403	V2403M-E2B	1G465-99350	4A0001 ~		4A0001 ~
		V2403MDI-E2B	1G485-99350	4A0001 ~		4A0001 ~
	F2803	F2803	07916-27807	~ 3Y9999	07916-27825	~ 3Y9999~ 3Y9999
		F2803-DI	07916-27812	~ 3Y9999	07916-27825	

Gasket Kit Index

...continued

MODEL			KIT PART NUMBER			
SERIES	BASE	SPECIFIC	UPPER	NOTES	LOWER	NOTES
05 SERIES	D905	D905(A1)	07916-27885	~WAOOO1	07916-27797	~1T0001
		D905 (B1)	16226-99352	~4R0301	16226-99364	~4Y9999
		D905 (C1)	1G032-99350	METAL	1G032-99360	~3A0001
	D1005	D1005 (A1)	07916-27787	~4Z0548	07916-27797	~4Z0548
		D1005 (B1)	1G041-99350	~ 5A0001	1G062-99360	~ 5A0001
	D1105	D1105 (A1)	07916-29116		07916-29126	
		D1105 (B1)	07916-27787	~4E9526	07916-27796	<15685
		D1105 (C1)	1G062-99350	~4G0001	1G995-99362	4A0001~
		D1105T	1G993-99352	4J0001~	1G995-99362	4A0001~
	V1205	V1205 (A2)	16246-99352	~WA0001	16246-99364	
		V1205 (B2)	16245-99350	WA0001~	16246-99364	
	V1305	V1305(A2)	07916-29046	~5E0010	07916-29126	~4G0001
		V1305(C2)	1G986-99650	5E0010~	1G986-99362	4G0001~
	V1505	V1505(A2)	16286-99352	~116861	07916-27855	
		V1505(B2)	16285-99352	116860~		
		V1505 (C2)	1G089-99350	4E9456~	1G986-99362	4A0001~
		V1505T	1G992-99352	4E9456~	SAME NA	
V3.3	V3300	V3300	07916-27320	SEE NOTE D	07916-27330	~YX0940
		V3300T	07916-27327		07916-27336	YX0940~
		V3300-E2B	1G533-99350	4A0001~	1G533-99360	4A0001~
		V3300T-E2B	1G563-99352	4A0001~		
	V3300 DI	V3300DI-E2B	1G526-99350	4A0001~	1G526-99360	4A0001~
		V3300DIT-E2B				
V3.8	V3800 DI	V3800DI-E2B	1G556-99350	4A0001~		
		V3800DIT-E2B				
WG, DF, DG	WG	WG600	12691-99057	NO LONGER AVAILABLE		
		WG750				
		WG750-LP				
		WG752-E2	07916-25060	ALL	EG601-99340	ALL
		WG972-E2	EG511-99330	ALL	EG511-99340	ALL
		WG1005	12691-99057	NONE		
	DF	DF750	NO LONGER AVAILABLE			
		DF752-E2	EG601-99330	ALL	EG601-99340	ALL
		DF972-E2	EG511-99330	ALL	EG511-99340	ALL
		DF1005	NONE			
DG	DFG750	NO LONGER AVAILABLE				
	DG750	NO LONGER AVAILABLE				
07 SERIES	V3307	V3307DI-T-E3	1G776-95350	ALL	1G777-99360	ALL

more...

Gasket Kit Index

...continued

MODEL			KIT PART NUMBER			
SERIES	BASE	SPECIFIC	UPPER	NOTES	LOWER	NOTES
Horizontal	ZB	ZB400	NONE			
		ZB500	NONE			
		ZB600-C	07916-24545	ALL	07916-24555	ALL
	EA/EB/EL	ALL	NONE			
	RK	ALL				
OC/AC	OC/AC	ALL	NONE			
GS/GH	GS	GS130	07916-29055			
		GS160	07916-29415			
		GS200	07916-29165			
	GH	GH120	07916-29365			
		GH170	07916-29370			
		GH280	07916-29395			
		GH340	NONE			
		GH400	07916-29140			

NOTE: 1

- A) For early model with pre 1997 with a diameter of 38 mm, and head gasket without the additional cooling holes between cylinders. Refer to Bulletin OEM 01.02
- B) For later model with the serial numbers 1997 and up with the thermostat diameter of 44 mm and the additional cooling holes.
- C) For more recent models with all metal head gasket. IMPORTANT: All metal head gasket must not be used in place of the carbon fiber gasket.

NOTE: 2

- A2) For early model pre 1997 with thermostat diameter of 38 mm.
- B2) For later models with 44 mm diameter thermostat.
- C2) For more recent model with all metal head gasket. This should not be used in place of a carbon fiber gasket.

NOTE

- D) P/N 07916-27320 for serial ~YX0940 --- models with one size non-metal head gasket P/N 07916-27327 for serial XY0940~ Models with multi-size all metal head gasket. Kit contains only 2 notch gasket. Refer to WSM for additional head gasket information.

Gasket Kit Contents

07916-24005	KIT GASKET U,Z400	
P/N	DESCRIPTION	QTY
15841-13150	SEAL, VALVE STEM	4
04811-50300	O RING	1
15221-33700	O RING	1
15841-03312	GASKET, CYL. HEAD	1
15841-11820	GASKET, IN/MANIFOLD	1
15852-11820	GASKET, IN/MANIFOLD	1
15841-12350	GASKET, EX/MANIFOLD	2
15841-14520	GASKET, HEAD COVER	1
15601-96650	PACKING	3
15841-53620	PACKING	2
15841-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER	1

07916-24015	KIT GASKET L,Z400	
P/N	DESCRIPTION	QTY
04810-00140	O RING	1
04811-06130	O RING	3
04811-10070	O RING	1
04811-10160	O RING	1
04811-16220	O RING	1
15021-33660	PACKING	2
15109-33660	PACKING	1
15601-96650	PACKING	4
15841-01620	GASKET, OIL PAN	1
15841-04140	SEAL, OIL	1
15841-04360	GASKET, BEARING CASE	1
15841-04820	GASKET, BRG CASE COVER	1
15841-57210	GASKET, CONTROL PLATE	1
15841-73430	GASKET, WATER PUMP	1
15841-83110	GASKET, HYD PUMP	1
15862-04130	GASKET, GEARCASE	1
15862-52140	GASKET, FUEL PUMP	1
16851-35150	GASKET, OIL PUMP	1
19215-99160	SEAL, OIL	1
19461-88130	GASKET, HOUR METER GEARCASE	1

07916-24065	KIT GASKET U,Z500	
P/N	DESCRIPTION	QTY
15261-13150	SEAL, VALVE STEM	4
04811-00080	O RING	2
4811-50300	O RING	1
15221-33700	O RING	1
15261-03310	GASKET, CYL.HEAD	1
15261-03320	SHIM CYL.HEAD GASKET	1
15261-11820	GASKET, IN/MANIFOLD	1
15261-11830	GASKET, IN/MANIFOLD	1
15261-12360	GASKET, EX/MANIFOLD	2
15261-14520	GASKET, HEAD COVER	1
15261-14630	GASKET, HEAD COVER NUT	2
15261-66640	GASKET DEC/OPENING	2
15951-96660	PACKING	2
15261-72920	GASKET, W/FLANGE NA	1
17011-53620	GASKET	2

07916-24075	KIT GASKET L,Z500	
P/N	DESCRIPTION	QTY
04810-00140	O RING	1
04810-00150	O RING	1
04811-06130	O RING	3
04811-10220	O RING	1
15021-33660	PACKING	2
15261-36430	GASKET, OIL GUAGE	1
09550-00008	SEAL, OIL	1
09560-00007	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

07916-24195	KIT GASKET U,D750	
P/N	DESCRIPTION	QTY
15261-13150	SEAL, VALVE STEM	6
04811-50300	O RING	1
04811-00080	O RING	1
15221-33700	O RING	1
15371-03312	GASKET, CYL.HEAD	1
15371-03322	SHIM CYL. HEAD GASKET	1
15261-11820	GASKET, IN/MANIFOLD	1
15261-11830	GASKET, IN/MANIFOLD	2
15381-12360	GASKET, EX/MANIFOLD	1

[more...](#)

Gasket Kit Contents

[...continued](#)

07916-24195 KIT GASKET U,D750		
P/N	DESCRIPTION	QTY
15381-14520	GASKET, HEAD COVER	1
15261-14630	GASKET, HEAD COVER NUT	1
15261-66640	GASKET, DEC/ OPENING	3
15261-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
15231-05130	GASKET, BREATHER	1
15321-05430	GASKET, BREATHER COVER	1
15263-12370	GASKET, MUFFLER	1
15951-96660	PACKING	3
04717-01600	WASHER, SEAL	1
17011-53620	GASKET	3

07916-24285 KIT GASKET U,V1502		
P/N	DESCRIPTION	QTY
FUTURE		

07916-24305 KIT GASKET U,V1902		
P/N	DESCRIPTION	QTY
15221-13150	SEAL, VALVE STEM	8
04811-50300	O RING	2
04811-06100	O RING	1
15808-03310	GASKET, CYL.HEAD	1
15471-11823	GASKET, IN/MANIFOLD	1
15521-12350	GASKET, EX/MANIFOLD	4
15471-14520	GASKET, HEAD COVER	1
15521-72920	GASKET, W/FLANGE NA	1
15221-66640	GASKET, DEC/OPENING	4
15321-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER NA	1
15021-33660	PACKING	4
15313-12370	PACKING	1
17011-53620	GASKET	4

07916-24345 KIT GASKET U,D1102		
P/N	DESCRIPTION	QTY
15221-13150	SEAL, VALVE STEM	6
04811-50300	O RING	4
04811-06100	O RING	1
15221-33770	O RING	1
15321-03310	GASKET, CYL.HEAD	1

[...continued](#)

07916-24345 KIT GASKET U,D1102		
P/N	DESCRIPTION	QTY
15521-11820	GASKET, IN/MANIFOLD	1
15521-12350	GASKET, EX/MANIFOLD	3
15521-14520	GASKET, HEAD COVER	1
15521-72920	GASKET, W/FLANGE NA	1
15321-73270	GASKET, THERMOSTAT	1
15021-33660	PACKING	3

07916-24345 KIT GASKET U,D1102		
P/N	DESCRIPTION	QTY
17011-53620	GASKET	3

07916-24365 KIT GASKET U,D1402		
P/N	DESCRIPTION	QTY
15221-13150	SEAL, VALVE STEM	6
04811-50300	O RING	2
04811-06100	O RING	1
15221-33770	O RING	1
15814-03310	GASKET, CYL.HEAD	1
15521-11820	GASKET, IN/MANIFOLD	1
15521-12350	GASKET, EX/MANIFOLD	3
15521-14520	GASKET, HEAD COVER	1
15521-72920	GASKET, W/FLANGE NA	1
15221-66640	GASKET, DEC/OPENING	3
15321-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER NA	1
15021-33660	PACKING	3
17011-53620	GASKET	3
04717-01600	WASHER, SEAL	1

07916-24385 KIT GASKET U,D950		
P/N	DESCRIPTION	QTY
15261-13150	SEAL, VALVE STEM	6
04714-00300	PACKING	2
04811-50300	O RING	1
04811-00080	O RING	1
15221-33700	O RING	1
15978-03310	GASKET, CYL.HEAD	1
15531-03320	SHIM CYL. GEAD GASKET	1
15261-11820	GASKET, IN/MANIFOLD	1
15261-11830	GASKET, IN/MANIFOLD	2
15261-12360	GASKET, EX/MANIFOLD	3

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

07916-24385 KIT GASKET U,D950		
P/N	DESCRIPTION	QTY
15381-12360	GASKET, EX/MANIFOLD	1
15381-14520	GASKET, HEAD COVER	1
15261-66640	GASKET DEC/OPENING	3
15261-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
15951-96660	PACKING	3
04717-01600	WASHER, SEAL	1
17011-53620	GASKET	3

07916-24405 KIT GASKET U,D850,DH850		
P/N	DESCRIPTION	QTY
15261-13150	SEAL, VALVE STEM	6
04811-050300	O RING	1
04811-00080	O RING	1
15221-33700	O RING	1
15582-03310	GASKET, CYL.HEAD	1
15381-03320	SHIM CYL. HEAD GASKET	1
15261-11820	GASKET, IN/MANIFOLD	1
15261-11830	GASKET, IN/MANIFOLD	2
15261-12362	GASKET, EX/MANIFOLD	3
15381-12360	GASKET, EX/MANIFOLD	2
15381-14520	GASKET, HEAD COVER	1
15261-66640	GASKET DEC/OPENING	3
15231-05130	GASKET BREATHER	1
15261-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER NA	1
15951-96660	PACKING	3
04717-01600	WASHER, SEAL	1
17011-53620	GASKET	3

07916-24465 KIT GASKET U,S2600		
P/N	DESCRIPTION	QTY
15221-13150	SEAL, VALVE STEM	12
04811-50300	O RING	1
04811-06100	O RING	2
15221-33770	O RING	1
15611-03312	GASKET, CYL.HEAD	1
15611-03320	SHIM CYL. HEAD GASKET	1
15601-11820	GASKET, IN/MANIFOLD	1

[...continued](#)

07916-24465 KIT GASKET U,S2600		
P/N	DESCRIPTION	QTY
15601-11830	GASKET, IN/MANIFOLD	3
15521-12350	GASKET, EX/MANIFOLD	6
15221-14630	GASKET, HEAD COVER NUT	6
15601-14520	GASKET, HEAD COVER	1
15221-66640	GASKET, DEC/OPENING	3
15321-05430	GASKET, BREATHER COVER	2
15601-72920	GASKET, W/FLANGE NA	1
15321-73270	GASKET, THERMOSTAT	1
15021-12360	GASKET, MUFFLER NA	1
15324-96650	PACKING	1
15021-33660	PACKING	1
17011-53620	GASKET	6

07916-24485 KIT GASKET U,S2800		
P/N	DESCRIPTION	QTY
15221-13150	SEAL, VALVE STEM	12
04811-50300	O RING	1
15221-33770	O RING	1
15621-03313	GASKET, CYL.HEAD	1
15621-03320	SHIM CYL. HEAD GASKET	1
15601-11820	GASKET, IN/MANIFOLD	1
15601-11830	GASKET, IN/MANIFOLD	3
15521-12350	GASKET, EX/MANIFOLD	6
15601-14520	GASKET, HEAD COVER	1
15621-14520	GASKET, HEAD COVER	1
15601-72920	GASKET, W/FLANGE NA	1
15321-73270	GASKET, THERMOSTAT	1
15621-12230	GASKET, MUFFLER NA	1
15324-96650	PACKING	1
15021-33660	PACKING	1
17011-53620	GASKET	6
04717-01600	WASHER	1
04810-00100	O RING	1
04810-00150	O RING	3
04811-00050	O RING	2
04811-00120	O RING	1
04811-00160	O RING	1
04811-00280	O RING	1
04811-06100	O RING	2

[more...](#)
[more...](#)

Gasket Kit Contents

...continued

07916-24485 KIT GASKET U,S2800		
P/N	DESCRIPTION	QTY
04811-10070	O RING	1
04811-10300	O RING	1
04811-40240	O RING	1
04811-50300	O RING	1
35880-94870	O RING	1
15021-33660	PACKING	9
15109-33660	PACKING	2
15213-32320	PACKING	1
15601-96650	PACKING	2
15401-32890	PACKING	1
34150-37860	PACKING	1
15601-01622	GASKET, OIL PAN	1
15605-01620	GASKET, OIL PAN	1

07916-24495 KIT GASKET L,S2800		
P/N	DESCRIPTION	QTY
09550-00001	SEAL, OIL	1
19202-04360	GASKET, BEARING CASE	1
15221-04820	GASKET, BRG CASE COVER	1
15221-57210	GASKET, CONTROL PLATE	1
15321-73430	GASKET, WATER PUMP	1
15601-04132	GASKET, GEARCASE	1
15221-05430	GASKET, BREATHER COVER	1
15221-51660	GASKET, PUMP COVER	1
15221-35150	GASKET, OIL PUMP	1
15241-52140	GASKET, FUEL PUMP	1
15601-04460	SEAL, OIL	1
15471-57980	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

07916-24525 KIT GASKET U,D600		
P/N	DESCRIPTION	QTY
15841-13150	SEAL, VALVE STEM	6
04811-50300	O RING	1
15221-33700	O RING	1
15861-03312	GASKET, CLY.HEAD	1
15861-11820	GASKET, IN/MANIFOLD	1
15862-11820	GASKET, IN/MANIFOLD	1

more...

...continued

07916-24525 KIT GASKET U,D600		
P/N	DESCRIPTION	QTY
15841-12350	GASKET, EX/MANIFOLD	1
15861-14520	GASKET, HEAD COVER	1
15841-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER NA	1
15601-96650	PACKING	4
15841-53620	SEAL, HEAT	3

07916-24535 KIT GASKET L,D600		
P/N	DESCRIPTION	QTY
04811-00140	O RING	1
04811-06130	O RING	3
04811-10070	O RING	1
04811-10160	O RING	1
04811-16220	O RING	1
15021-33660	PACKING	2
15109-33660	PACKING	1
15601-96650	PACKING	4
15861-01620	GASKET, OIL PAN	1
15841-04140	SEAL, OIL	1
15841-04360	GASKET, BEARING CASE	1
15841-04820	GASKET, BRG CASE COVER	1
15841-57210	GASKET, CONTROL PLATE	1
15841-73430	GASKET, WATER PUMP	1
15841-83110	GASKET, HYD PUMP	1
15862-04130	GASKET, GEARCASE	1
15862-52140	GASKET, FUEL PUMP	1
16851-35150	GASKET, OIL PUMP	1
19215-99160	SEAL, OIL	1
19461-88130	GASKET, HOUR METER GEARCASE	1

07916-24545 KIT GASKET U,ZB600-C		
P/N	DESCRIPTION	QTY
04811-00080	O RING	1
15221-33770	O RING	1
15261-11820	GASKET, IN-MANIFOLD	1
15261-11830	GASKET, IN-MANIFOLD	1
15261-13150	SEAL, VALVE STEM	4
15261-14520	GASKET, HEAD COVER	1

more...

Gasket Kit Contents

...continued

07916-24545 KIT GASKET U,ZB600-C		
P/N	DESCRIPTION	QTY
15261-14630	GASKET, HEAD COVER NUT	2
15261-66640	GASKET, DEC/OPENING	2
15271-03380	GASKET, COVER	1
15272-12360	GASKET, EX-MANIFOLD	2
15901-03310	GASKET, CYL HEAD	1
15901-03320	SHIM, CYL HEAD GASKET	1
17011-53620	GASKET, NOZZLE PIECE	2

07916-24555 KIT GASKET L,ZB600-C		
P/N	DESCRIPTION	QTY
04724-00120	PACKING	1
04810-00150	O RING	1
04811-00120	O RING	1
04811-10440	O RING	1
04811-10070	O RING	1
04811-10100	O RING	1
04811-10120	O RING	1
04811-50300	O RING	1
09560-00007	SEAL, OIL	1
15021-33660	PACKING	1
15109-33660	PACKING	1
15231-05130	GASKET, BREATHER	2
15271-01620	GASKET, OIL PAN	1
15271-04140	SEAL, OIL	1
15271-04290	GASKET, CAP	1
15271-04360	GASKET, BEARING CASE	1
15271-04720	GASKET, CRAKCASE COVER	1
15271-04820	GASKET, BEARING CASE COVER	1
15271-35160	O RING	1
15271-54150	GASKET, SUPPORT	1
15271-72120	GASKET, RADIATOR	1
15276-04130	GASKET, GEARCASE	1
15901-54190	PACKING	2
19215-04460	SEAL, OIL	1

07916-24565 KIT GASKET U,Z600		
P/N	DESCRIPTION	QTY
15261-13150	SEAL, VALVE STEM	4
04811-50300	O RING	1

...continued

07916-24565 KIT GASKET U,Z600		
P/N	DESCRIPTION	QTY
04811-00080	O RING	1
15221-33700	O RING	1
15901-03314	GASKET, CYL.HEAD	1
15901-03320	SHIM CYL. HEAD GASKET	1
15261-11820	GASKET, IN/MANIFOLD	1
15261-11830	GASKET, IN/MANIFOLD	1
15261-12360	GASKET, EX/MANIFOLD	2
15272-12360	GASKET, EX/MANIFOLD	2
15261-14520	GASKET, HEAD COVER	1
15261-66640	GASKET DEC/OPENING	2
15261-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER NA	1
15951-96660	PACKING	2
04707-01600	WASHER, SEAL	1
04714-00300	PACKING	1
15324-96650	PACKING	1
17011-53620	GASKET	2

07916-24585 KIT GASKET U,D1302		
P/N	DESCRIPTION	QTY
15521-14520	GASKET HEAD COVER	1
15313-11820	INTAKE MANIFOLD GASKET	1
15313-12350	EXHAUST MANIFOLD GASKET	1
15221-13150	VALVE SEALS	6
15296-66640	GASKET	3
15766-72920	GASKET	1
15263-12370	EXHAUST GASKET	1
15313-73270	GASKET	1
T0070-16420	GASKET	1
15313-03310	HEAD GASKET	1
04811-06100	O-RING	1
04811-50300	O-RING	2
15221-33700	O-RING	1
15021-33660	GASKET	3
17011-53620	GASKET	3

more...

Gasket Kit Contents

...continued

07916-27320 KIT GASKET U,V3300 [~YX0940]		
P/N	DESCRIPTION	QTY
1C010-03310	GASKET, CYL HEAD [CARBON-TYPE]	1
1C010-14520	GASKET, HEAD COVER	1
1C010-12352	GASKET, EX-MANIFOLD	1
1C010-11820	GASKET, IN-MANIFOLD	1
1C010-73270	GASKET, THERMOSTAT	1
1C010-72820	GASKET, W/FLANGE	1
1C040-17110	GASKET, TURBO TO FLANGE	1
1C040-17100	GASKET, TURBO TO MANI-FOLD	1
1C010-72922	GASKET, W/FLANGE	1
16299-33670	PACKING, COVER	1
1C011-12230	GASKET, MUFFLER	1
1C010-13160	SEAL, VALVE STEM	4
19077-53650	SEAL, HEAT	4
1C010-13150	SEAL, VALVE STEM	8
04811-50300	O RING	1
15221-33700	O RING	1
15021-33660	GASKET	2
15109-33660	GASKET	1
15471-96650	GASKET	2
15601-96650	GASKET	2
15841-53622	GASKET	4

07916-27327 KIT GASKET U,V3300 [~YX0940]		
P/N	DESCRIPTION	QTY
1C020-03310	GASKET, CYL HEAD [ALL METAL 2-NOTCH]	1
1C010-14520	GASKET, HEAD COVER	1
1C010-12352	GASKET, EX-MANIFOLD	1
1C010-11820	GASKET, IN-MANIFOLD	1
1C010-73270	GASKET, THERMOSTAT	1
1C010-72820	GASKET, W/FLANGE	1
1C040-17110	GASKET, TURBO TO FLANGE	1
1C040-17100	GASKET, TURBO TO MANI-FOLD	1
1C010-72922	GASKET, W/FLANGE	1
1C040-05130	GASKET, BREATHER VALVE COVER	1
1C040-33670	PACKING, COVER	1
1C011-12230	GASKET, MUFFLER	1

07916-27327 KIT GASKET U,V3300 [~YX0940]		
P/N	DESCRIPTION	QTY
1C010-13160	SEAL, VALVE STEM	4
19077-53650	SEAL, HEAT	4
1C010-13150	SEAL, VALVE STEM	8
04817-50300	O RING	1
15021-33660	GASKET	2
15109-33660	GASKET	1
1C020-96650	GASKET	2
15601-96650	GASKET	2
15841-53622	GASKET	4

07916-27336 KIT GASKET L,V3300 [~YX0940]		
P/N	DESCRIPTION	QTY
1C010-04130	GEAR CASE GASKET	1
1C010-51180	GASKET	1
1C010-73430	WATER PUMP GASKET	1
1C010-51660	GASKET	1
16264-52140	GASKET	1
15625-32890	GASKET	1
16264-88130	GASKET	1
1C010-16220	O-RING	1
1C010-52130	O-RING	1
1C010-55770	O-RING	1
15021-33660	PACKING COPPER	5
15471-96650	PACKING COPPER	2
15601-96650	PACKING COPPER	18
15451-99670	GASKET	3
04724-00200	GASKET	1
1C010-04140	SEAL	1
1C010-04460	SEAL	1
04814-00200	O-RING	1
04814-00240	O-RING	1
04811-50300	O-RING	2
04811-10070	O-RING	2
04811-00220	O-RING	1
04811-00160	O-RING	1
04818-00420	O-RING	1
04815-06710	O-RING	2
1C011-43330	GASKET	1

more...

Gasket Kit Contents

...continued

07916-27330	KIT GASKET L,V3300 [~YX0940]	
P/N	DESCRIPTION	QTY
NO LONGER AVAILABLE		

07916-27812	KIT GASKET U,F2803 DI	
P/N	DESCRIPTION	QTY
17121-03310	GASKET CYLINDER HEAD	1
17381-14520	GASKET HEAD COVER	1
17121-11820	GASKET IN MANIFOLD	1
15522-12350	GASKET EX MANIFOLD	5
17383-12370	GASKET MUFFLER	1
17383-12380	GASKET MUFFLER	1
15766-72920	GASKET WATER FLANGE	1
15313-73270	GASKET	1
15221-13150	SEAL VALVE STEM	10
15021-33660	GASKET	5
15221-33700	O-RING	1
04811-50300	O-RING	1

07916-27825	KIT GASKET L,F2803 DI	
P/N	DESCRIPTION	QTY
15296-51660	GASKET	1
15296-35150	GASKET	1
17326-04130	GEAR CASE GASKET	1
15766-7330	GASKET	1
15439-57210	GASKET	1
15296-88130	GASKET	1
17326-73430	WATER PUMP GASKET	1
15263-52140	GASKET	1
17326-32620	GASKET	1
15625-05430	GASKET	1
17121-01620	OIL PAN GASKET	1
16478-01620	OIL PAN GASKET	1
19077-04360	GASKET	1
17118-04830	GASKET	1
04811-00120	O-RING	1
04811-00150	O-RING	3
04811-00180	O-RING	1
04811-00200	O-RING	1
04811-00360	O-RING	1
04811-10300	O-RING	1
19202-96830	O-RING	1

07916-27825	KIT GASKET L,F2803 DI	
P/N	DESCRIPTION	QTY
15471-57980	SEAL OIL	1
17381-04460	SEAL OIL	1
19202-04140	SEAL OIL	1
15021-33660	GASKET	3
15109-33660	GASKET COPPER	2
15401-96650	WASHER-NIPPLE	2
15451-96670	GASKET COPPER	1
15601-96650	GASKET COPPER	2

07916-29005	KIT GASKET U,V800	
P/N	DESCRIPTION	QTY
15841-13150	SEAL, VALVE STEM	8
04811-50300	O RING	1
15221-33700	O RING	1
15881-03310	GASKET, CYL.HEAD	1
15861-11820	GASKET, IN/MANIFOLD	1
15841-12350	GASKET, EX/MANIFOLD	1
15861-14520	GASKET, HEAD COVER	1
15881-14520	GASKET, HEAD COVER	1
15263-12370	GASKET, MUFFLER NA	1
15601-96650	PACKING	5
15841-53620	SEAL, HEAT	4

07916-29015	KIT GASKET L,V800	
P/N	DESCRIPTION	QTY
04811-00140	O RING	1
04811-06130	O RING	3
04811-10070	O RING	1
04811-10160	O RING	1
04811-16220	O RING	1
15021-33660	PACKING	2
15109-33660	PACKING	1
15601-96650	PACKING	4
15881-01620	GASKET, OIL PAN	1
15841-04140	SEAL, OIL	1
15841-04360	GASKET, BEARING CASE	1
15841-04820	GASKET, BRG CASE COVER	1
15841-57210	GASKET, CONTROL PLATE	1
15881-73430	GASKET, WATER PUMP	1
15841-72920	GASKET, WATER FLANGE	1

more...

more...

Gasket Kit Contents

[...continued](#)

07916-29015	KIT GASKET L,V800	
P/N	DESCRIPTION	QTY
15841-83110	GASKET, HYD PUMP	1
15862-04130	GASKET GEARCASE	1
15862-52140	GASKET, FUEL PUMP	1
16851-35150	GASKET, OIL PUMP	1
15676-73270	GASKET, THERMOSTAT	1
19215-99160	SEAL, OIL	1
19461-88130	GASKET, HOUR METER GEARCASE	1

07916-29055	KIT GASKET OH,GS130 SERIES	
P/N	DESCRIPTION	QTY
04724-00120	PACKING	2
04811-00160	O RING	1
09500-00025	SEAL, OIL	1
09500-00026	SEAL, OIL	1
12025-11510	GASKET, A/C	1
12866-11510	GASKET, A/C	1
13391-11510	GASKET, A/C	1
13484-01340	GASKET, CRANKCASE 2	1
13484-11510	GASKET, A/C	1
13484-12230	GASKET, MUFFLER	1
13484-13820	GASKET, TAPPET COVER	1
13484-46110	GASKET, CARBU	3
13901-44740	PACKING	1
13901-56240	PACKING	1
13484-03310	GASKET, CYL. HEAD	1

07916-29165	KIT GASKET OH,GS200 SERIES	
P/N	DESCRIPTION	QTY
04724-00120	PACKING	2
04811-00180	O RING	1
04811-00160	O RING	1
09500-00023	SEAL, OIL	1
12866-04460	SEAL, OIL	1
13106-04460	SEAL, OIL	1
12025-11510	GASKET, A/C	1
12866-11510	GASKET, A/C	1
13932-11512	GASKET, ELBOW A/C	1
12866-01180	GASKET, CRANKCASE	1
13921-01180	GASKET, CRANKCASE	1

[...continued](#)

07916-29165	KIT GASKET OH,GS200 SERIES	
P/N	DESCRIPTION	QTY
12035-12230	GASKET, MUFFLER	1
12201-13820	GASKET, TAPPET COVER	1
13884-13820	GASKET, TAPPET COVER	1
13848-46110	GASKET, CARBU	2
13941-44750	PACKING	1
13901-56240	PACKING	1
13941-03310	GASKET, CYL. HEAD	1

07916-29175	KIT GASKET U,D640	
P/N	DESCRIPTION	QTY
15841-13150	SEAL, VALVE STEM	6
04811-50300	O RING	1
15221-33700	O RING	1
15875-03310	GASKET, CYL.HEAD	1
15861-11820	GASKET, IN/MANIFOLD	1
15862-11820	GASKET, IN/MANIFOLD	1
15861-12350	GASKET, EX/MANIFOLD	1
15861-14520	GASKET, HEAD COVER	1
15841-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER NA	1
15601-96650	PACKING	4
15841-53620	SEAL, HEAT	3

07916-29185	KIT GASKET L,D640	
P/N	DESCRIPTION	QTY
04811-00140	O RING	1
04811-06130	O RING	3
04811-10070	O RING	1
04811-10160	O RING	1
04811-00160	O RING	1
04811-16220	O RING	1
15021-33660	PACKING	2
15109-33660	PACKING	1
15601-96650	PACKING	4
15861-01620	GASKET, OIL PAN	1
15841-04140	SEAL, OIL	1
15841-04360	GASKET, BEARING CASE	1
15841-04820	GASKET, BRG CASE COVER	1
15841-57210	GASKET, CONTROL PLATE	1

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

07916-29185	KIT GASKET L,D640	
P/N	DESCRIPTION	QTY
15881-73430	GASKET, WATER PUMP	1
15862-04130	GASKET, GEARCASE	1
15862-52140	GASKET, FUEL PUMP	1
16851-35150	GASKET, OIL PUMP	1
19215-99160	SEAL, OIL	1

07916-29305	KIT GASKET U,V1100, VH1100	
P/N	DESCRIPTION	QTY
15261-13150	SEAL, VALVE STEM	8
04811-50300	O RING	1
15221-33700	O RING	1
15443-03313	GASKET, CYL. HEAD	1
15443-03320	SHIM CYL. HEAD GASKET	1
15261-11820	GASKET, IN/MANIFOLD	1
15261-11830	GASKET, IN/MANIFOLD	3
15261-12360	GASKET, EX/MANIFOLD	4
15442-14520	GASKET, HEAD OVER	1
15261-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER NA	1
15951-96660	PACKING	4
04724-00210	PACKING	1
17011-53620	GASKET	4

07916-29315	KIT GASKET L,V1100, VH1100	
P/N	DESCRIPTION	QTY
04811-00070	O RING	1
04811-06130	O RING	3
04811-10070	O RING	1
04811-10220	O RING	1
04811-00140	O RING	1
04811-00150	O RING	3
15021-33660	PACKING	2
15109-33660	PACKING	1
15601-96650	PACKING	3
15442-01620	GASKET, OIL PAN	1
09550-00008	SEAL OIL	1
15261-04360	GASKET, BEARING CASE	1
15261-04820	GASKET, BRG CASE COVER	1
15261-57210	GASKET, CONTROL PLATE	1

[...continued](#)

07916-29315	KIT GASKET L,V1100, VH1100	
P/N	DESCRIPTION	QTY
15531-73430	GASKET, WATER PUMP	1
15531-04132	GASKET, GEARCASE	1
15231-05130	GASKET, BREATHER	1
15261-73920	GASKET, PUMP COVER	1
15521-04790	GASKET, COVER	1
15261-35150	GASKET OIL PUMP	1
15241-52140	GASKET, FUEL PUMP	1
15231-87130	GASKET, HYD PUMP	1
19215-04460	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

07916-29325	KIT GASKET U,V1200	
P/N	DESCRIPTION	QTY
15261-13150	SEAL, VALVE STEM	8
04811-50300	O RING	1
15221-33700	O RING	1
15442-03313	GASKET, CYL.HEAD	1
15442-03320	SHIM CYL.HEAD GASKET	1
15442-11820	GASKET, IN/MANIFOLD	1
15261-11830	GASKET, IN/MANIFOLD	3
15261-12360	GASKET, EX/MANIFOLD	4
15442-1260	GASKET, EX/MANIFOLD	1
15442-14520	GASKET, HEAD COVER	1
15261-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER NA	1
15951-96660	PACKING	4
17011-53620	GASKET	4

07916-29335	KIT GASKET L,V1200	
P/N	DESCRIPTION	QTY
04811-00070	O RING	1
04811-06130	O RING	3
04811-10070	O RING	1
04811-10220	O RING	1
04811-00140	O RING	1
04811-00150	O RING	1
15021-33660	PACKING	2
15109-33660	PACKING	1

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

07916-29335	KIT GASKET L,V1200	
P/N	DESCRIPTION	QTY
15601-96650	PACKING	2
15442-01620	GASKET, OIL PAN	1
09550-00008	SEAL, OIL	1
15261-04360	GASKET, BEARING CASE	1
15261-04820	GASKET, BRG CASE COVER	1
15261-57210	GASKET, CONTROL PLATE	1
15531-73430	GASKET, WATER PUMP	1
15531-04132	GASKET, GEARCASE	1
15231-05130	GASKET, BREATHER	1
15261-73920	GASKET, PUMP COVER	1
15261-35150	GASKET, OIL PUMP	1
15231-87130	GASKET, HYD PUMP	1
19215-04460	SEAL, OIL	1
15221-88130	GASKET, HOUR METER CASE	1

07916-29345	KIT GASKET U,V2203/V2202-DI	
P/N	DESCRIPTION	QTY
04724-00210	GASKET	1
04811-50300	O RING	1
15021-33660	GASKET	1
15221-13150	SEAL, VALVE STEM	1
15221-33700	O RING	1
15321-73270	GASKET, THERMOSTAT	1
15471-12230	GASKET, MUFFLER	1
15471-14520	GASKET, HEAD COVER	1
15521-12350	GASKET, EX/MANIFOLD	1
15521-72920	GASKET, WATER FLANGE	1
17111-11820	GASKET, IN/MANIFOLD	1
19013-03310	GASKET, CYL.HEAD	1

07916-29345	KIT GASKET U,V2203/V2202-DI	
P/N	DESCRIPTION	QTY
04724-00210	GASKET	1
04811-50300	O RING	1
15021-33660	GASKET	1
15221-13150	SEAL, VALVE STEM	1
15221-33700	O RING	1
15321-73270	GASKET, THERMOSTAT	1
15471-12230	GASKET, MUFFLER	1

[...continued](#)

07916-29345	KIT GASKET U,V2203/V2202-DI	
P/N	DESCRIPTION	QTY
15471-14520	GASKET, HEAD COVER	1
15521-12350	GASKET, EX/MANIFOLD	1
15521-72920	GASKET, WATER FLANGE	1
17111-11820	GASKET, IN/MANIFOLD	1
19013-03310	GASKET, CYL.HEAD	1

07916-29356	KIT GASKET L,V2203/V2202-DI	
P/N	DESCRIPTION	QTY
04274-00160	PACKING	1
04811-00120	O RING	1
04811-00150	O RING	3
04811-00160	O RING	1
04811-00360	O RING	1
04811-10300	O RING	1
15021-33660	PACKING	1
15109-33660	PACKING	1
15221-35150	GASKET, OIL PUMP	1
15221-51660	GASKET, PUMP COVER	1
15221-88130	GASKET, HOUR METER UNIT	1
15241-52140	GASKET, FUEL PUMP	1
15469-01620	GASKET OIL PAN	1
15471-57980	SEAL, OIL	1
15521-04133	GASKET, GEARCASE	1
15521-04790	GASKET, COVER	1
15521-73330	GASKET, WATER RETURN FLANGE	1
15521-73430	GASKET, WATER PUMP	1
15601-96650	PACKING	2
17331-57210	GASKET, SPEED CONTROL PLATE	1
19013-04362	GASKET, BEARING CASE	1
19013-04830	GASKET, BEARING CASE COVER	1
19202-04140	SEAL, OIL	1

07916-29365	KIT GASKET OH,GH120 SERIES	
P/N	DESCRIPTION	QTY
04724-00120	PACKING	2
04811-00160	O RING	1
09500-00025	SEAL, OIL	1
09500-00026	SEAL, OIL	1

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

07916-29365 KIT GASKET OH,GH120 SERIES		
P/N	DESCRIPTION	QTY
12866-11510	GASKET, A/C	1
13901-11510	GASKET, A/C	1
12653-46160	GASKET, INSULATOR	1
12653-11820	GASKET, ELBOW A/C	1
12643-01340	GASKET, CRANKCASE	1
12643-12230	GASKET, MUFFLER	1
12643-14520	GASKET, HEAD COVER	1
12643-05430	GASKET, BREATHER	1
13848-48110	GASKET, CARBU	2
13641-56240	PACKING	1
13941-44750	PACKING	1
12643-03310	GASKET, CYL. HEAD	1

07916-29395 KIT GASKET OH,GH280 SERIES		
P/N	DESCRIPTION	QTY
04724-00120	PACKING	1
04811-00180	O RING	1
13961-16640	SEAL, OIL	1
13961-23640	SEAL, OIL	1
12628-11510	GASKET, A/C	1
12628-46160	GASKET, INSULATOR	1
12628-11820	GASKET, ELBOW A/C	1
12628-01340	GASKET, CRANKCASE	1
12627-12230	GASKET, MUFFLER	1
12627-14520	GASKET, HEAD COVER	1
12628-46110	GASKET, CARBU	1
13266-44740	GASKET, FLOAT CHAMER	1
13641-56240	PACKING	1
12556-03310	GASKET, CYK. HEAD	1

07916-29415 KIT GASKET OH,GS160 SERIES		
P/N	DESCRIPTION	QTY
04724-00120	PACKING	1
04811-00160	O RING	1
09500-00025	SEAL, OIL	1
09500-00026	SEAL, OIL	1
12866-04460	SEAL, OIL	1
12313-11510	GASKET, A/C	1
12866-11510	GASKET, A/C	1
13901-11510	GASKET, A/C	1

[...continued](#)

07916-29415 KIT GASKET OH,GS160 SERIES		
P/N	DESCRIPTION	QTY
12866-01180	GASKET, CRANKCASE	1
13921-01180	GASKET, CARNKCASE	1
13932-11512	GASKET, ELBOW A/C	1
13921-12232	GASKET, MUFFLER	1
12201-13820	GASKET, TAPPET COVER	1
13884-13820	GASKET, TAPPET COVER	1
13484-46110	GASKET, CARBU	1
13941-44750	PACKING	1
13901-56240	PACKING	1
13921-03310	GASKET, CYL. HEAD	1

07916-29545 KIT GASKETU,V4702		
P/N	DESCRIPTION	QTY
FUTURE		

07916-29525 KIT GASKET U,D3502		
P/N	DESCRIPTION	QTY
FUTURE		

07916-29555 KIT GASKET L,V4702		
P/N	DESCRIPTION	QTY
FUTURE		

07916-29595 KIT GASKET L,D850		
P/N	DESCRIPTION	QTY
04810-00300	O RING	1
04811-00070	O RING	1
04811-00140	O RING	1
04811-06130	O RING	3
04811-10070	O RING	1
04811-10220	O RING	1
04714-00300	PACKING	1
09400-14247	SEAL, OIL	1
09550-00008	SEAL, OIL	1
09560-00007	SEAL, OIL	1
15021-33660	PACKING	2
15109-33660	PACKING	3
15601-96650	PACKING	2
15381-01620	GASKET, OIL PAN	1
19269-01620	GASKET, OIL PAN	1
19215-04460	SEAL, OIL	1

[more...](#)
[more...](#)

Gasket Kit Contents

...continued

07916-29595	KIT GASKET L,D850	
P/N	DESCRIPTION	QTY
15261-04360	GASKET, BEARING CASE	1
15261-04820	GASKET, BRG CASE COVER	1
15261-57210	GASKET, CONTROL PLATE	1
15531-73430	GASKET, WATER PUMP	1
15261-73920	GASKET, WATER COVER	1
15261-04132	GASKET, GEARCASE	1
15531-04132	GASKET, GEARCASE	1
15241-52140	GASKET, FUEL PUMP	1
15261-35150	GASKET, OIL PUMP	1
15221-88130	GASKET, HOUR METER GEARCASE	1
15231-05130	GASKET, BREATHER	1
15231-87130	GASKET, HYD PUMP	1

07916-29615	KIT GASKET L,V1902	
P/N	DESCRIPTION	QTY
04811-00060	O RING	1
04811-00120	O RING	1
04811-00160	O RING	1
04811-00360	O RING	1
04811-10070	O RING	1
04811-00150	O RING	3
04811-10160	O RING	1
04811-10300	O RING	1
15021-33660	PACKING	2
15109-33660	PACKING	1
15321-96650	PACKING	1
15451-96670	PACKING	1
19222-83110	PACKING	1
15601-96650	PACKING	2
15401-01620	GASKET, OIL PAN	1
15469-01620	GASKET, OIL PAN	1
17365-01620	GASKET, OIL PAN	1
09500-00001	SEAL, OIL	1
19202-04360	GASKET, BEARING CASE	1
15469-83110	GASKET, FUEL CAMSHAFT COVER	1
15221-04820	GASKET, BRG CASE COVER	1
15221-57210	GASKET, CONTROL PLATE	1
17331-57210	GASKET, CONTROL PLATE	1

...continued

07916-29615	KIT GASKET L,V1902	
P/N	DESCRIPTION	QTY
15521-73430	GASKET, WATER PUMP	1
15521-73330	GASKET, WATER RETURN FLANGE	1
15521-04133	GASKET, GEARCASE	1
15221-51660	GASKET PUMP COVER	1
15221-35150	GASKET, OIL PUMP	1
15261-36430	GASKET, OIL GUAGE	1
15241-52140	GASKET, FUEL PUMP	1
15221-04460	SEAL, OIL	1
15471-57980	SEAL, OIL	1
19202-04460	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

07916-29635	KIT GASKET L,D1402	
P/N	DESCRIPTION	QTY
04811-00120	O RING	1
04811-00140	O RING	1
04811-00360	O RING	1
04811-10070	O RING	1
04811-00150	O RING	4
04811-10300	O RING	1
15021-33660	PACKING	1
15109-33660	PACKING	1
34150-37860	PACKING	1
15601-96650	PACKING	2
15431-01620	GASKET, OIL PAN	1
09550-00001	SEAL, OIL	1
19202-04360	GASKET BEARING CASE	1
15221-04820	GASKET, BRG CASE COVER	1
15221-57210	GASKET, CONTROL PLATE	1
17331-57210	GASKET, CONTROL PLATE	1
15521-73430	GASKET, WATER PUMP	1
15521-73330	GASKET, WATER RETURN FLANGE	1
15521-04133	GASKET, GEARCASE	1
15221-51660	GASKET, PUMP COVER	1
15221-35150	GASKET OIL PUMP	1
19202-04460	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

more...

[Back](#)

5-17

[Next](#)

Oct 1, 2008

Gasket Kit Contents

...continued

07916-29645	KIT GASKET L,D1302	
P/N	DESCRIPTION	QTY
	FUTURE	

07916-29695	KIT GASKET U,V1702	
P/N	DESCRIPTION	QTY
15221-13150	SEAL, VALVE STEM	8
04811-50300	O RING	1
04811-06100	O RING	1
15221-33700	O RING	1
19227-03310	GASKET, CYL.HEAD	1
15471-11823	GASKET, IN/MANIFOLD	1
15521-12350	GASKET, EX/MANIFOLD	4
15471-14520	GASKET, HEAD COVER	1
15521-72920	GASKET, W/FLANGE NA	1
15221-66640	GASKET, DEC/OPENING	4
15321-73270	GASKET, THERMOSTAT	1
15263-12370	GASKET, MUFFLER NA	1
15021-33660	PACKING	4
15313-12370	PACKING	1
17011-53620	GASKET	4
04717-01600	WASHER, SEAL	1

07916-29705	KIT GASKET L,V1702	
P/N	DESCRIPTION	QTY
04811-00060	O RING	1
04811-00120	O RING	1
04811-00160	O RING	1
04811-00360	O RING	1
04811-10070	O RING	1
04811-00150	O RING	3
04811-10300	O RING	1
15021-33660	PACKING	1
15109-33660	PACKING	1
19222-83110	PACKING	1
15601-96650	PACKING	2
15401-01620	GASKET, OIL PAN	1
15469-01620	GASKET, OIL PAN	1
09500-00001	SEAL, OIL	1
19202-04360	GASKET, BEARING CASE	1
15221-04820	GASKET, BRG CASE COVER	1
15221-57210	GASKET, CONTROL PLATE	1

07916-29705	KIT GASKET L,V1702	
P/N	DESCRIPTION	QTY
15521-73430	GASKET, WATER PUMP	1
15521-73330	GASKET, WATER RETURN FLANGE	1
15521-04133	GASKET, GEARCASE	1
15221-51660	GASKET PUMP COVER	1
15221-35150	GASKET, OIL PUMPO	1
15241-52140	GASKET, FUEL PUMP	1
1920204460	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

07916-29865	KIT GASKET L,D750,D950	
P/N	DESCRIPTION	QTY
04810-00140	O RING	2
04810-00150	O RING	1
04811-00070	O RING	1
04811-05140	O RING	2
04811-05230	O RING	1
04811-01630	O RING	3
04811-10070	O RING	1
04811-10220	O RING	1
04714-00100	PACKING	2
09400-14247	SEAL, OIL	1
09550-00008	SEAL, OIL	1
09560-00007	SEAL, OIL	1
15021-33660	PACKING	2
15109-33660	PACKING	3
15601-96650	PACKING	2
66591-51160	PACKING	1
67810-36420	PACKING	1
15381-01620	GASKET, OIL PAN	1
19269-01620	GASKET, OIL PAN	1
15261-04360	GASKET, BEARING CASE	1
15261-04820	GASKET, BRG CASE COVER	1
15261-57210	GASKET, CONTROL PLATE	1
15531-73430	GASKET, WATER PUMP	1
15261-73920	GASKET, WATER PUMP	1
15261-04132	GASKET, WATER COVER	1
15531-04132	GASKET, GEARCASE	1
15241-52140	GASKET, FUEL PUMP	1

more...

more...

Gasket Kit Contents

[...continued](#)

07916-29865	KIT GASKET L,D750,D950	
P/N	DESCRIPTION	QTY
15261-35150	GASKET, OIL PUMP	1
15261-36430	GASKET, OIL GUAGE	1
15221-88130	GASKET, HOUR METER GEARCASE	1
15231-05130	GASKET, BREATHER	1
15231-87130	GASKET, HYD PUMP	1
15841-04140	SEAL, OIL	1
19215-04460	SEAL, OIL	1

07916-29875	KIT GASKET U,D1100	
P/N	DESCRIPTION	QTY
04717-01600	WASHER, SEAL	1
04811-06100	O RING	4
04811-50300	O RING	1
15021-33660	PACKING	3
15324-96650	PACKING	1
15221-11820	GASKET, IN/MANIFOLD	1
15231-11830	GASKET, IN/MANIFOLD	1
15221-11820	GASKET, IN/MANIFOLD	1
15221-12350	GASKET, EX/MANIFOLD	2
15221-12360	GASKET, EX/MANIFOLD	3
15521-12350	GASKET, EX/MANIFOLD	3
15221-13150	SEAL, VALVE STEM	12
15221-14630	GASKET, HEAD COVER NUT	3
15221-66640	GASKET, DEC/OPENING	3
15221-72920	GASKET, WATER/FLANGE	1
15321-03310	GASKET, CYL HEAD	1
15321-14520	GASKET, HEAD COVER	1
15521-14520	GASKET, HEAD COVER	1
15231-73270	GASKET, THERMOSTAT	1
15221-05430	GASKET, BREATHER COVER	2
15321-05430	GASKET, BREATHER COVER	2
17011-53620	GASKET, NOZZLE PIECE	3

07916-29880	KIT GASKET L,D1100	
P/N	DESCRIPTION	QTY
04810-00140	O RING	1
04811-00050	O RING	2
04811-00100	O RING	1
04811-00120	O RING	1

[...continued](#)

07916-29880	KIT GASKET L,D1100	
P/N	DESCRIPTION	QTY
04811-00140	O RING	1
04811-00150	O RING	3
04811-10300	O RING	1
04811-40240	O RING	1
15021-33660	PACKING	6
15109-33660	PACKING	4
15221-54150	PACKING	2
15313-12370	PACKING	1
34150-37860	PACKING	1
15321-01620	GASKET, OIL PAN	1
15341-01620	GASKET, OIL PAN	1
09500-00001	SEAL, OIL	1
19202-04360	GASKET, BEARING CASE	1
15221-04820	GASKET, BRG CASE COVER	1
15221-57210	GASKET, CONTROL PLATE	1
15321-73430	GASKET, WATER PUMP	1
15341-73430	GASKET, WATER PUMP	1
15221-04130	GASKET, GEARCASE	1
15601-04132	GASKET, GEARCASE	1
15221-51660	GASKET, PUMP COVER	1
15221-35150	GASKET, OIL PUMP	1
15221-04460	SEAL, OIL	1
19202-04460	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

07916-29905	KIT GASKET L,Z600	
P/N	DESCRIPTION	QTY
04724-00160	PACKING	1
04810-00140	O RING	1
04810-00150	O RING	1
04811-00070	O RING	1
04811-06130	O RING	3
04811-10220	O RING	1
04811-10700	O RING	1
15021-33660	PACKING	2
15109-33660	PACKING	3
15601-96650	PACKING	2
66591-51160	PACKING	1

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

07916-29905	KIT GASKET L,Z600	
P/N	DESCRIPTION	QTY
15261-01620	GASKET, OIL PAN	1
15952-01620	GASKET, OIL PAN	1
09400-14247	SEAL, OIL	1
15261-04360	GASKET, BEARING CASE	1
15261-04820	GASKET, BRG CASE COVER	1
15261-57210	GASKET, CONTROL PLATE	1
15531-73430	GASKET, WATER PUMP	1
15261-73920	GASKET, WATER COVER	1
15231-87130	GASKET, HYD PUMP	1
15261-04132	GASKET, GEARCASE	1
15531-04132	GASKET, GEARCASE	1
15231-05130	GASKET, BREATHER	1
15521-04790	GASKET, COVER	1
15241-52140	GASKET, FUEL PUMP	1
15261-35150	GASKET, OIL PUMP	1
15261-36430	GASKET, OIL GUAGE	1
09550-00008	SEAL, OIL	1
09560-00007	SEAL, OIL	1
19215-04460	SEAL, OIL	1
19215-99160	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

07916-29915	KIT GASKET L,S2600	
P/N	DESCRIPTION	QTY
04810-00100	O RING	1
04810-00150	O RING	3
04811-00050	O RING	2
04811-00120	O RING	1
04811-00160	O RING	
04811-00200	O RING	
04811-10070	O RING	
04811-10300	O RING	
04811-40240	O RING	
04811-50300	O RING	
15021-33660	PACKING	
15109-33660	PACKING	
15601-96650	PACKING	
15221-54150	PACKING	

[...continued](#)

07916-29915	KIT GASKET L,S2600	
P/N	DESCRIPTION	QTY
15401-32890	PACKING	
34150-37860	PACKING	1
15601-01622	GASKET, OIL PAN	1
15605-01620	GASKET, OIL PAN	1
09550-00001	SEAL, OIL	1
19202-04360	GASKET, BEARING CASE	1
15221-04820	GASKET, BRG CASE COVER	1
15221-57210	GASKET, CONTROL PLATE	1
17331-57210	GASKET, CONTROL PLATE	1
15321-73430	GASKET, WATER PUMP	1
15601-04132	GASKET, GEARCASE	1
15221-05430	GASKET, BREATHER COVER	1
15221-51660	GASKET, PUMP COVER	1
15221-35150	GASKET, OIL PUMP	1
15241-52140	GASKET, FUEL PUMP	1
15601-04460	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

07916-29955	KIT GASKET L,D1102	
P/N	DESCRIPTION	QTY
04811-00050	O RING	2
04811-00120	O RING	1
04811-00140	O RING	1
04811-00360	O RING	1
04811-10070	O RING	1
04811-00150	O RING	3
04811-10300	O RING	1
15021-33660	PACKING	2
15109-33660	PACKING	2
34150-37860	PACKING	1
15601-96650	PACKING	2
15301-01620	GASKET, OIL PAN	1
15341-01620	GASKET, OIL PAN	1
09500-00001	SEAL, OIL	1
15221-04460	SEAL, OIL	1
19202-04360	GASKET, BEARING CASE	1
15221-04820	GASKET BRG CASE COVER	1
15221-57210	GASKET, CONTROL PLATE	1

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

07916-29955	KIT GASKET L,D1102	
P/N	DESCRIPTION	QTY
15521-73430	GASKET, WATER PUMP	1
15521-73330	GASKET, WATER RETURN FLANGE	1
15521-04133	GASKET, GEARCASE	1
15521-04790	GASKET, COVER	1
15221-51660	GASKET, PUMP COVER	1
15221-35150	GASKET, OIL PUMP	1
19202-04460	SEAL, OIL	1
15221-88130	GASKET, HOUR METER GEARCASE	1

07916-29985	KIT GASKET L,V1502	
P/N	DESCRIPTION	QTY
15471-14520	GASKET HEAD COVER	1
15766-11820	INTAKE MANIFOLD GASKET	1
1A091-12350	EX MANIFOLD GASKET	1
15221-13150	VALVE SEAL	8
15439-12350	EX MANIFOLD GASKET	1
1A021-72920	GASKET	1
15296-66640	GASKET	1
1A021-73270	THERMOSTAT GASKET	1
15439-03310	HEAD GASKET	1
04816-06100	O RING	1
04816-50300	O RING	2
15221-3370	O RING	1
15021-33660	GASKET	4
17011-53620	GASKET	4

12581-99053	KIT GASKET WG600	
P/N	DESCRIPTION	QTY
15221-33700	O RING	1
04814-06130	O RING	3
04817-00140	O RING	1
04814-50300	O RING	1
04814-16220	O RING	1
12581-03310	GASKET, CYL HEAD	1
15862-04130	GASKET, GEAR CASE	1
15877-04140	SEAL, OIL	1
15852-04360	GASKET, BEARING CASE	1
15841-04820	GASKET	1

[...continued](#)

12581-99053	KIT GASKET WG600	
P/N	DESCRIPTION	QTY
1G460-04460	SEAL, OIL	1
EG601-11820	GASKET, IN-MANIFOLD	1
12581-11830	GASKET	1
12581-11840	GASKET	1
15263-12370	PACKING, MUFFLER	1
15861-12350	GASKET	1
11420-13150	SEAL, VALVE STEM	6
16861-14520	GASKET, HEAD COVER	1
16851-35150	GASKET, OIL PUMP	1
12035-46110	GASKET, CARBURETOR	1
EG281-51660	GASKET	1
16264-52140	GASKET, FUEL PUMP	1
12581-55850	SEAL, OIL	1
15841-57210	GASKET, CONTROL PLATE	1
EG281-56340	GASKET	1
EG283-67720	GASKET, CAP SPARK PLUG	3
15841-72920	GASKET, WATER FLANGE	1
15841-73430	GASKET, WATER PUMP	1
16851-73270	GASKET, THERMOSTAT	1

12691-99052	KIT GASKET WG750, DF750	
P/N	DESCRIPTION	QTY
04814-06130	O RING	3
04817-00160	O RING	1
04814-50300	O RING	1
04814-16220	O RING	1
EG601-03310	GASKET, CYL HEAD	1
15862-04130	GASKET, GEAR CASE	1
15877-04140	SEAL, OIL	1
15852-04360	GASKET, BEARING CASE	1
15841-04820	GASKET	1
1G460-04460	SEAL, OIL	1
EG601-11820	GASKET, IN-MANIFOLD	1
12581-11830	GASKET	1
12581-11840	GASKET	1
15263-12370	PACKING, MUFFLER	1
15861-12350	GASKET	1
11420-13150	SEAL, VALVE STEM	6
16861-14520	GASKET, HEAD COVER	1

[more...](#)
[more...](#)

Gasket Kit Contents

...continued

12691-99052	KIT GASKET WG750, DF750	
P/N	DESCRIPTION	QTY
16851-35150	GASKET, OIL PUMP	1
12035-46110	GASKET, CARBURETOR	1
EG281-51660	GASKET	1
16264-52140	GASKET, FUEL PUMP	1
12581-55850	SEAL, OIL	1
EG281-56340	GASKET	1
EG283-67720	CAP.SPARK PLUG	3
15841-72920	GASKET, WATER FLANGE	1
15881-73432	GASKET, WATER PUMP	1
16851-73270	GASKET, THERMOSTAT	1

07916-27885	KIT GASKET U,D905	
P/N	DESCRIPTION	QTY
16221-03310	GASKET CYL.HEAD NA	1
16261-14520	GASKET, HEAD COVER	1
16261-11822	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER NA	1
16261-12350	GASKET, E-MANIFOLD NA	1
16241-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15221-33700	O RING	1
15951-96660	GASKET, COPPER	3
1C010-13150	SEAL, VALVE STEM	6

1G032-99350	KIT GASKET U,D905 <4P0496	
P/N	DESCRIPTION	QTY
16221-03310	GASKET, CYL.HEAD NA	1
16261-14520	GASKET, HEAD COVER	1
16261-11822	GASKET, IN-MANIFOLD NA	1
15862-12230	GASKET, MUFFLER.NA	1
16261-12350	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15951-96660	GASKET, COPPER	3
1C010-13150	SEAL, VALVE STEM	6
19077-53650	HEAT SEAL	3
15221-33700	O RING	1

16226-99352	KIT GASKET U,D905	
P/N	DESCRIPTION	QTY
16221-03310	GASKET CYL.HEAD NA	1
16261-14520	GASKET, HEAD COVER	1
16261-11822	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16261-12350	GASKET, E-MANIFOLD NA	1
16241-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15221-33700	O RING	1
15951-96660	GASKET, COPPER	3
1C010-13150	SEAL, VALVE STEM	6

16226-99364	KIT GASKET L,D905/1005/1105	
P/N	DESCRIPTION	QTY
16266-01620	GASKET, OIL PAN	1
16264-04130	GASKET, GEARCASE	1
16264-04360	GASKET, BRG.CASE NA	1
16264-04820	GASKET, BRG.CASE NA	1
16299-60150	GASKET, SOLENOID	1
16264-52140	GASKET, F/PUMP NA	1
16264-57210	GASKET NA	1
16299-83110	GASKET, PUMP COVER	1
16239-73430	GASKET, WATER PUMP NA	1
16299-83110	GASKET NA	1
16299-56260	GASKET NA	1
16264-88130	GASKET, HOUR METER	1
04814-06100	O RING	2
04814-00150	O RING	2
04814-10280	O RING	1
04814-00160	O RING	1
15601-96650	GASKET, COPPER	5
15121-42670	PACKING	2
15451-96670	GASKET, COPPER	1
16241-04212	SEAL, OIL	1
16285-04460	SEAL, OIL	1

07916-27797	KIT GASKET L,D1005 <=4Z999	
P/N	DESCRIPTION	QTY
04811-00100	O RING	1
04814-00100	O RING	1

[more...](#)

Gasket Kit Contents

[...continued](#)

07916-27797	KIT GASKET L,D1005 <=4Z999	
P/N	DESCRIPTION	QTY
04814-00150	O RING	2
04814-06100	O RING	2
04814-00610	O RING	1
04814-10280	O RING	1
04811-10460	O RING	1
15021-33660	GASKET	1
15109-33660	GASKET	1
6C090-58960	GASKET	1
16271-04460	OIL SEAL	1
15601-96650	GASKET	5
16264-52140	GASKET FUEL PUMP	1
16264-04130	GASKET GEAR CASE	1
16241-04212	OIL SEAL	1
16264-04360	GASKET BRG CASE	1
16264-04820	GASKET BRG CASE	1
16299-56260	GASKET	1
16264-57210	GASKET	1
16264-88130	GASKET HOUR METER	1
16251-73430	GASKET WATER PUMP	1
16239-73430	GASKET WATER PUMP	1
19202-96750	O RING	1
04814-10070	O RING	1
15841-96650	GASKET	1
15864-96650	GASKET	2

07916-27786	KIT GASKET U,D1005 <=4Z9999	
P/N	DESCRIPTION	QTY
16231-03310	GASKET CYL.HEAD NA	1
16261-14520	GASKET, HEAD COVER	1
16261-11822	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16261-12350	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15221-33700	O RING	1
15951-96660	GASKET, COPPER	3
1C010-13150	SEAL, VALVE STEM	6
04811-50300	O RING	2

[...continued](#)

07916-27786	KIT GASKET U,D1005 <=4Z9999	
P/N	DESCRIPTION	QTY
15601-96650	GASKET	1
16851-73270	GASKET	1
15313-73270	GASKET THERMOSTAT	1
16241-13150	SEAL VALVE STEM	6
15313-12370	GASKET NA	1
16261-96710	GASKET	1
19077-53650	SEAL HEAT	3

07916-29125	KIT GASKET U,D1005 <=4Z9999	
P/N	DESCRIPTION	QTY
04811-00100	O RING	1
04811-00150	O RING	2
04811-00160	O RING	1
04811-06100	O RING	2
04811-10280	O RING	1
04811-10460	O RING	1
15021-33660	GASKET	1
15109-33660	GASKET	1
15121-42670	GASKET	2
15471-57980	SEAL OIL	1
15601-96650	GASKET	4
16264-52140	FUEL PUMP GASKET	1
16264-04130	GASKET GEAR CASE	1
16241-04212	SEAL OIL	1
16264-04360	GASKET BRG CASE	1
16264-04820	GASKET BRG CASE	1
16299-56260	GASKET	1
16264-57210	GASKET	1
16264-88130	GASKET	1
16261-01630	GASKET OIL PAN	1
16261-73430	GASKET WATER PUMP	1
16299-60150	GASKET SOLENOID COVER	1

16246-99352	KIT GASKET U,V1205	
P/N	DESCRIPTION	QTY
16241-03310	GASKET, CYLINDER HEAD	1
16241-14520	GASKET, HEAD COVER.NA	1
16241-11820	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16299-12360	GASKET, E-MANIFOLD NA	1

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

16246-99352 KIT GASKET U,V1205		
P/N	DESCRIPTION	QTY
16264-72920	GASKET, W/FLANGE NA	1
16264-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15221-33700	O RING	1
15951-96660	GASKET, COPPER	4
1C010-13150	SEAL, VALVE STEM	8

16246-99364 KIT GASKET L,V1205,V1305		
P/N	DESCRIPTION	QTY
16299-01620	GASKET OIL PAN NA	1
16264-04130	GASKET, G/CASE NA	1
16264-04360	GASKET, BRG.CASE NA	1
16264-04820	GASKET, BRG.CASE NA	1
16264-52140	GASKET,F/PUMP NA	1
16264-57210	GASKET NA	1
16299-83110	GASKET, PUMP COVER	1
16239-73430	GASKET, WATER PUMP NA	1
16299-60150	GASKET NA	1
15601-96650	GASKET, COPPER	5
15841-96650	GASKET	2
16299-56260	GASKET NA	1
16264-88130	GASKET, H/METER UNIT	1
04814-06100	O RING	2
04814-00150	O RING	2
04814-1028/0	O RING	1
04814-00160	O RING	1
15451-96670	PACKING	1
15841-96660	GASKET	1
15841-53620	GASKET	4
16285-04460	SEAL, OIL	1
16241-04210	SEAL, OIL	1

16256-99352 KIT GASKET U,V1305		
P/N	DESCRIPTION	QTY
16282-03310	GASKET, CYL.HEAD NA	1
16241-14520	GASKET, HEAD COVER.NA	1
16241-11820	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16299-12360	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1

[...continued](#)

16256-99352 KIT GASKET U,V1305		
P/N	DESCRIPTION	QTY
16851-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15221-33700	O RING	1
15951-96660	GASKET, COPPER	4
1C010-13150	SEAL, VALVE STEM	8

16265-99352 KIT GASKET U,D1105		
P/N	DESCRIPTION	QTY
1E038-03310	GASKET, CYL.HEAD NA	1
16261-14520	GASKET, HEAD COVER	1
16261-11822	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16261-12350	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15221-33700	O RING	1
15951-96660	GASKET, COPPER	3
1C010-13150	SEAL, VALVE STEM	6

16266-99352 KIT GASKET U,D1105		
P/N	DESCRIPTION	QTY
16261-03310	GASKET, CYL.HEAD NA	1
16261-14520	GASKET, HEAD COVER	1
16261-11822	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16261-12350	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1
15676-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15221-33700	O RING	1
15951-96660	GASKET, COPPER	3
1C010-13150	SEAL, VALVE STEM	6

07916-29116 KIT GASKET U,D1105		
P/N	DESCRIPTION	QTY
04816-50300	O RING	2
15221-33700	O RING	1
15601-96650	GASKET	1
15676-73270	GASKET	1
15841-53622	GASKET	3

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

07916-29116 KIT GASKET U,D1105		
P/N	DESCRIPTION	QTY
15951-96660	GASKET	3
16241-13150	SEAL VALVE STEM	6
16261-03310	GASKET CYL HEAD	1
16261-11822	GASKET IN MANIFOLD	1
16261-12350	EX MANIFOLD	1
16261-14520	GASKET HEAD COVER	1
15263-12370	GASKET MUFFLER	1
15313-12370	GASKET NA	1
16264-72920	GASKET WATER FLANGE	1
16261-96710	GASKET	2

07916-29120 KIT GASKET L,D1105		
P/N	DESCRIPTION	QTY
04811-00100	O RING	1
04811-00150	O RING	2
04811-00160	O RING	1
04811-06100	O RING	2
04811-10280	O RING	1
04811-10460	O RING	1
15021-33660	GASKET	1
15109-33660	GASKET	1
15121-42670	GASKET	2
15471-57980	SEAL OIL	1
15601-96650	GASKET	4
16264-52140	GASKET FUEL PUMP	1
16264-04130	GASKET GEAR CASE	1
16241-04212	SEAL OIL	1
16264-04360	GASKET BRG.CASE	1
16264-04820	GASKET	1
16299-56260	GASKET	1
16264-57210	GASKET	1
16264-88130	GASKET HOUR METER	1
16261-01620	OIL PAN GASKET	1
16261-73430	WATER PUMP GASKET	1
16299-60150	GASKET	1

07916-29046 KIT GASKET U,V1305		
P/N	DESCRIPTION	QTY
16271-03310	GASKET, CYL.HEAD NA	1
16241-14520	GASKET, HEAD COVER.NA	1

[...continued](#)

07916-29046 KIT GASKET U,V1305		
P/N	DESCRIPTION	QTY
16241-11820	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16299-12360	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1
16851-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15221-33700	O RING	1
15951-96660	GASKET, COPPER	4
1C010-13150	SEAL, VALVE STEM	8
15601-96650	GASKET	1
15841-536622	GASKET	4
15841-96650	GASKET	2
15951-96660	GASKET	4
16261-96710	GASKET	1

1G089-99360 KIT GASKET L,V1505 <6K0475		
P/N	DESCRIPTION	QTY
16264-04130	GASKET GEAR CASE	1
16264-04360	GASKET BRG.CASE	1
16264-04820	GASKET	1
16264-52140	GASKET, FUEL PUMP	1
16264-57210	GASKET	1
16239-73430	GASKET WATER PUMP	1
16264-88130	GASKET H/METER UNIT	1
16299-56260	GASKET	1
15021-33660	GASKET	1
04724-00130	GASKET	1
04814-50600	O RING	1
04814-10070	O RING	1
04814-06100	O RING	2
04814-00100	O RING	1
04814-00150	O RING	2
04814-10280	O RING	1
04814-00160	O RING	1
15601-96650	GASKET	5
15841-96660	GASKET	2
15471-96650	GASKET	2
15841-96660	GASKET	1
15841-53622	GASKET	4

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

1G089-99360 KIT GASKET L,V1505 <6K0475		
P/N	DESCRIPTION	QTY
16241-04212	SEAL OIL	1
16271-04460	SEAL OIL	1

1G089-99362 KIT GASKET L,V1505 >6K0475		
P/N	DESCRIPTION	QTY
16264-04130	GASKET GEAR CASE	1
16264-04360	GASKET BRG.CASE	1
16264-52140	GASKET FUEL PUMP	1
16264-57210	GASKET	1
16239-73430	GASKET WATER PUMP	1
16264-88130	GASKET H/METER UNIT	1
16299-56260	GASKET	1
15021-33660	GASKET	1
04814-10070	O RING	1
04814-00100	O RING	1
04814-10280	O RING	1
04814-00160	O RING	1
15601-96650	GASKET	5
15841096650	GASKET	2
15471096650	GASKET	2
15841-53622	GASKET	4
16241-04212	SEAL OIL	1
16271-04460	SEAL OIL	1
16264-04822	GASKET CASE COVER	1

1G089-99350 KIT GASKET U,V1505		
P/N	DESCRIPTION	QTY
16394-03310	GASKET, CYL.HEAD NA	1
16241-14520	GASKET, HEAD COVER.NA	1
16241-11820	GASKET IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16299-12360	GASKET, E-MANIFOLD	1
16264-72920	GASKET, W/FLANGE NA	1
16264-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15951-96660	GASKET, COPPER	4
1C010-13150	SEAL, VALVE STEM	8

07916-28885 KIT GASKET U,D1403		
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1

[...continued](#)

07916-28885 KIT GASKET U,D1403		
P/N	DESCRIPTION	QTY
15221-13153	SEAL, VALVE STEM	6
15221-33700	O RING	1
04817-50300	O RING	1
16427-03310	GASKET CYL.HEAD NA	1
1A021-11820	GASKET, IN-MANIFOLD NA	1
1A021-12350	GASKET, EX-MANIFOLD	1
15521-14520	GASKET, HEAD COVER	1
15021-33660	GASKET NA	6
1A021-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET THERMOSTAT	1
17326-12230	GASKET, MUFFLER NA	1

07916-28887 KIT GASKET U,D1403		
P/N	DESCRIPTION	QTY
15221-33700	O RING	1
16427-03310	GASKET CYL HEAD	1
17326-11820	GASKET IN MANIFOLD	1
1A021-12350	GASKET EX MANIFOLD	1
15221-13150	SEAL VALVE	6
15521-14520	GASKET HEAD COVER	1
19077-53652	SEAL, HEAT	3
15021-33660	GASKET	3
15841-53622	GASKET	3
1A021-72920	WATER FLANGE GASKET	1
1A021-73270	GASKET THERMO COVER	1
17326-12230	GASKET MUFFLER	1

1G703-99360 KIT GASKET L,D1403		
P/N	DESCRIPTION	QTY
15021-33660	GASKET	1
1A02101620	GASKET	1
04817-00220	O RING	1
04817-00360	O RING	1
1A021-04130	GASKET, GEAR CASE NA	1
1A091-04820	GASKET, CASE COVER NA	1
1A021-73330	GASKET RETURN FLANGE	1
1A091-04362	GASKET BEARING FLANGE	1
19202-04460	SEAL OIL	1
19202-04140	SEAL OIL	1
04811-10300	O RING	1

[more...](#)
[more...](#)

Gasket Kit Contents

...continued

1G703-99360	KIT GASKET L,D1403	
P/N	DESCRIPTION	QTY
04817-00160	O RING	1
1A021-51660	GASKET PUMP COVER	1
1A021-35150	GASKET OIL PUMP	1
15221-96650	GASKET	2
04814-00060	O RING	1
04724-00140	GASKET	1
1G751-52140	GASKET, FUEL PUMP	1
1A021-73430	GASKET, W/PUMP NA	1
16691-57980	SEAL OIL	3
1A021-57212	GASKET	1
04814-06310	O RING	1

07916-27715	KIT GASKET U,D1703	
P/N	DESCRIPTION	QTY
T0070-16420	GASKET MUFFLER	1
1G758-99355	KIT GASKET UPPER	1
1G750-03310	GASKET CYLINDER HEAD	1
1G750-03312	GASKET CYLINDER HEAD	1
1A021-11822	GASKET IN-MANIFOLD	1
15221-13153	SEAL VALVE STEM	6
1A021-14520	GASKET HEAD COVER	1
1A021-14523	GASKET HEAD COVER	1
1G911-05200	COMP. VALVE BREATHER	1
1G911-05202	COMP. VALVE BREATHER	1
1G911-05203	COMP. VALVE BREATHER	1
15841-53622	GASKET	3
19077-53650	SEAL HEAT	3
1A021-72920	GASKET WATER FLANGE	1
16221-73270	GASKET THERMOSTAT	1
1A021-12350	GASKET EX-MANIFOLD	1
15221-33700	O RING	1
16487-03310	GASKET CYL.HEAD	1
15221-13150	SEAL VALVE STEM	6
15841-53620	GASKET	3
19077-53650	SEAL HEAT	3
15521-14520	GASKET HEAD COVER	1
15021-33660	GASKET	3
17326-11820	GASKET IN-MANIFOLD	1
15313-12350	GASKET EX-MANIFOLD	1

...continued

07916-27715	KIT GASKET U,D1703	
P/N	DESCRIPTION	QTY
T0070-16420	GASKET MUFFLER	1
15766-72920	GASKET WATER FLANGE	1
15313-73270	GASKET THERMOSTAT	1

07916-27727	KIT GASKET L,D1703	
P/N	DESCRIPTION	QTY
16221-73270	GASKET THERMOSTAT	1
1A021-12350	GASKET EX-MANIFOLD	1
15221-33700	O RING	1
16487-03310	GASKET CYL.HEAD	1
15221-13150	SEAL VALVE STEM	6
15841-53620	GASKET	3
19077-53650	SEAL HEAT	3
15521-14520	GASKET HEAD COVER	1
15021-33660	GASKET	3
17326-11820	GASKET IN-MANIFOLD	1
15313-12350	GASKET EX-MANIFOLD	1
T0070-16420	GASKET MUFFLER	1
15766-72920	GASKET WATER FLANGE	1
15313-73270	GASKET THERMOSTAT	1
15021-33660	GASKET	1
15296-35150	GASKET OIL PUMP	1
17326-01620	GASKET OIL PAN	1
15109-33660	GASKET	2
04811-00160	O RING	1
04811-10300	O RING	1
19202-04140	SEAL OIL	1
17118-04360	GASKET BRG. CASE	1
17118-04830	GASKET BRG.CASE COV.	1
19202-04460	SEAL OIL	1
15521-04790	PACKING COVER	1
04811-00150	O RING	2
04811-00200	O RING	1
04811-00360	O RING	1
17326-32620	GASKET	1
19202-96830	O RING	1
17326-04132	GASKET GEAR CASE	1
15766-73330	GASKET WATER FLAN GE	1
15296-88130	GASKET H/METER DRIVE	1

more...

more...

Gasket Kit Contents

[...continued](#)

07916-27727 KIT GASKET L,D1703		
P/N	DESCRIPTION	QTY
17326-73430	GASKET WATER PUMP	1
15263-52140	GASKET FUEL PUMP	1
15221-96650	GASKET	2
15021-33660	GASKET	2
15471-57980	SEAL OIL	1
15296-51660	GASKET PUMP COVER	1
15601-96650	GASKET	2
04811-00120	O RING	1
15439-57210	GASKET	1

07916-27736 KIT GASKET U,V1903		
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8
15221-33700	O RING	1
04811-50300	O RING	1
16454-03310	GASKET, CYL.HEAD NA	1
16423-11820	GASKET, IN-MANIFOLD NA	1
15439-12350	GASKET, EX-MANIFOLD	1
15296-12350	GASKET, EX-MANIFOLD NA	1
15471-14522	GASKET, HEAD COVER	1
15021-33660	GASKET NA	7
15766-72920	GASKET, W/FLANGE NA	1
15313-73270	GASKET THERMOSTAT	1
17326-12230	GASKET, MUFFLER NA	1

07916-29515 KIT GASKET L,V1903/2203		
P/N	DESCRIPTION	QTY
1G780-01620	GASKET	1
04817-00150	O RING	2
04817-00200	O RING	1
04817-00360	O RING	1
15766-04132	GASKET, GEAR CASE NA	1
1A091-04820	GASKET, CASE COVER NA	1
1G911-04460	SEAL, OIL(WHEEL SIDE)	1
19202-04140	SEAL, OIL	1
04811-10300	O RING	1
04817-00160	O RING	1
15401-96650	WASHER, NIPPLE	2
15451-96670	PACKING	2

[...continued](#)

07916-29515 KIT GASKET L,V1903/2203		
P/N	DESCRIPTION	QTY
1A051-16220	GASKET	1
1G751-52140	GASKET	1
15601-96650	GASKET, COPPER	2
15021-33660	GASKET, COPPER	2
04817-00120	O RING	1
1E147-57210	GASKET, S/CONTROL NA	1
15766-73430	GASKET, W/PUMP NA	1
15481-53620	GASKET	4
1A021-73330	GASKET, FLANGE NA	1
1G751-88130	GASKET	1
19077-53652	SEAL, HEAT	4

07916-27807 KIT GASKET U,F2803		
P/N	DESCRIPTION	QTY
16484-03310	HEAD GASKET	1
17381-14520	ROCKER COVER GASKET	1
17394-11820	INLET MANIFOLD GASKET	1
15313-12350	EX MANIFOLD GASKET	1
15439-12350	EX MANIFOLD GASKET	1
16221-73270	THERMOSTAT GASKET	1
15625-12360	GASKET	1
1A021-72920	GASKET	1
15625-32890	GASKET	1
1C011-12230	EX GASKET	1
17380-12380	GASKET	1
15841-53622	O RING	5
15109-33660	O RING	1
15021-33660	PACKING	5
19077-53650	HEAT SEAL	5
15221-13150	VALVE SEAL	10
15221-33700	O RING	1
04811-50300	O RING	1

07916-27825 KIT GASKET L,F2803 A/LA		
P/N	DESCRIPTION	QTY
17326-04130	GEAR CASE GASKET	1
15296-35150	OIL PUMP GASKET	1
15296-51660	GASKET	1
15766-73330	GASKET	1
15439-57210	GASKET	1

[more...](#)
[more...](#)

Gasket Kit Contents

...continued

07916-27825	KIT GASKET L,F2803 A/LA	
P/N	DESCRIPTION	QTY
15296-88130	GASKET	1
17329-73430	WATER PUMP GASKET	1
15263-52140	GASKET	1
17326-32620	GASKET	1
15625-05430	GASKET	1
19077-04360	BRG CASE SHIM	1
17118-04830	BRG CASE GASKET	1
17121-01620	OIL PAN GASKET	1
16478-01620	OIL PAN GASKET	1
04811-00120	O RING	1
04811-00150	O RING	3
04811-00180	O RING	1
04811-00200	O RING	1
04811-00360	O RING	1
04811-10300	O RING	1

07916-27825	KIT GASKET L,F2803 A/LA	
P/N	DESCRIPTION	QTY
19202-96830	O RING	1
15471-57980	OIL SEAL	1
17381-04460	OIL SEAL	1
19202-04140	OIL SEAL	1
15021-33660	GASKET	3
15109-33660	GASKET COPPER	2
15401-96650	WASHER	2
15451-96670	GASKET COPPER	1
15601-96650	GASKET COPPER	2

07916-29435	KIT GASKET U,Z482	
P/N	DESCRIPTION	QTY
11420-13150	SEAL, VALVE STEM	4
16851-03310	GASKET, CYL.HEAD NA	1
15841-11820	GASKET NA	1
15263-12370	GASKET, MUFFLER.NA	1
16851-12360	GASKET	1
16851-14522	GASKET, HEAD COVER	1
04814-50300	O RING	1
15221-33700	O RING	1
15601-96650	GASKET NA	2
15841-72923	GASKET, W/FLANGE NA	1
16851-73270	GASKET, T/COVER NA	1

07916-29495	KIT GASKET L,Z482	
P/N	DESCRIPTION	QTY
15221-33700	O RING	1
16265-96670	PACKING	1
15881-73432	GASKET, WATER PUMP NA	1
15862-04132	GASKET, GEAR CASE NA	1
04814-06130	O RING	3
15877-04140	SEAL, OIL	1
15852-04360	GASKET, BRG.CASE NA	1
19215-99160	SEAL, OIL (WHEEL SIDE)	1
15841-04822	GASKET, CASE COVER.NA	1
04814-16220	O RING	1
04814-00160	O RING	1
16851-35152	GASKET, OIL PUMP NA	1
16264-52140	GASKET, F/PUMP NA	1
04814-10160	O RING	1
04814-10070	O RING	1
04814-10070	O RING	1
15841-57212	GASKET,CONT.PLATE NA	1
19461-88132	GASKET,H/M.G/CASE.NA	1
15841-53620	GASKET	2
15841-96650	GASKET	2
15841-96610	GASKET	1

07916-29466	KIT GASKET L,D662/D722	
P/N	DESCRIPTION	QTY
15881-73432	GASKET,WATER PUMP NA	1
15862-04132	GASKET,GEAR CASE NA	1
04814-06130	O RING	3
15877-04140	SEAL,OIL	1
15852-04360	GASKET,BRG.CASE NA	1
19215-99160	SEAL,OIL(WHEEL SIDE)	1
15841-04822	GASKET,CASE COVER.NA	1
04814-00160	O RING	1
16851-35152	GASKET,OIL PUMP NA	1
16264-52140	GASKET,F/PUMP NA	1
04814-10160	O RING	1
04814-10070	O RING	1
15841-57212	GASKET,CONT.PLATE NA	1
19461-88132	GASKET,H/M.G/CASE.NA	1
15841-53620	GASKET	2

[more...](#)

Gasket Kit Contents

...continued

07916-29466	KIT GASKET L,D662/D722	
P/N	DESCRIPTION	QTY
15841-96650	GASKET	2
15841-96610	GASKET	1
15601-96650	PACKING	4
15021-33660	PACKING	2
16265-96670	PACKING	1

07916-29485	KIT GASKET U,D662	
P/N	DESCRIPTION	QTY
11420-13150	SEAL,VALVE STEM	6
16861-03310	GASKET,CYL.HEAD NA	1
15861-11820	GASKET NA	1
15263-12370	GASKET,MUFFLER.NA	1
1G318-12350	GASKET	1
16871-14520	GASKET,HEAD COVER	1
04814-50300	O RING	1
15221-33700	O RING	1
15601-96650	GASKET NA	3
15841-72923	GASKET,W/FLANGE NA	1
16851-73270	GASKET,T/COVER NA	1

07916-29477	KIT GASKET U,D722	
P/N	DESCRIPTION	QTY
11420-13150	SEAL,VALVE STEM	6
16871-03310	GASKET,CYL.HEAD NA	1
15861-11820	GASKET NA	1
15263-12370	GASKET,MUFFLER.NA	1
1G318-12350	GASKET	1
16871-14520	GASKET,HEAD COVER	1
04814-50300	O RING	1
15601-96650	GASKET NA	3
15841-72923	GASKET,W/FLANGE NA	1
16851-73270	GASKET,T/COVER NA	1

07916-29505	KIT GASKET U,V2203	
P/N	DESCRIPTION	QTY
04717-01000	WASHER,WITH RUBBER	1
15221-13153	SEAL,VALVE STEM	8
15221-33700	O RING	1
04811-50300	O RING	1
19077-03310	GASKET CYL.HEAD NA	1

...continued

07916-29505	KIT GASKET U,V2203	
P/N	DESCRIPTION	QTY
16423-11820	GASKET,IN-MANIFOLD NA	1
15439-12350	GASKET,EX-MANIFOLD	1
15296-12350	GASKET,EX-MANIFOLD NA	1
15471-14522	GASKET,HEAD COVER	1
15021-33660	GASKET NA	7
15766-72920	GASKET,W/FLANGE NA	1
15313-73270	GASKET THERMOSTAT	1
17326-12230	GASKET,MUFFLER NA	1

1G460-99350	KIT GASKET U,Z602	
P/N	DESCRIPTION	QTY
11420-13150	SEAL,VALVE STEM	4
04814-50300	O RING	1
1G460-03310	GASKET,CYL.HEAD	1
1G460-11820	GASKET,IN/MANIFOLD	1
1G460-12350	GASKET,EX/MANIFOLD	1
1G460-14520	GASKET,HEAD COVER	1
15841-53622	GASKET NA	2
19077-53650	SEAL,HEAT	2
15841-72923	GASKET,W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
15862-12230	GASKET,MUFFLER NA	1
K2511-83270	GASKET,MUFFLER NA	1
1A021-05430	O-RING, BREATHER	1
11420-13150	SEAL,VALVE STEM	4
04814-50300	O RING	1
1G460-03310	GASKET,CYL.HEAD	1
1G460-11820	GASKET,IN/MANIFOLD	1
1G460-12350	GASKET,EX/MANIFOLD	1
1G460-14520	GASKET,HEAD COVER	1
15841-53622	GASKET NA	2
19077-53650	SEAL,HEAT	2
15841-72923	GASKET,W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
15862-12230	GASKET,MUFFLER NA	1
K2511-83270	GASKET,MUFFLER NA	1
1A021-05430	O-RING, BREATHER	1

more...

Gasket Kit Contents

...continued

1G460-99350 KIT GASKET L,Z602		
P/N	DESCRIPTION	QTY
15221-33700	O RING	1
04724-00130	GASKET	1
6C090-58960	GASKET, DRAIN. OILPAN	1
15881-73432	GASKET, WATER PUMP NA	1
1G460-04132	GASKET, GEAR CASE	1
04814-06130	O RING	3
15877-041410	SEAL, OIL	1
15852-04360	GASKET, BRG CASE	1
1G460-04460	SEAL, OIL	1
15841-04822	GASKET, CASE COVER.NA	1
04814-16220	O RING	1
04814-00160	O RING	1
16851-35152	GASKET, OIL PUMP NA	1
04814-00090	O RING	1
15601-96650	GASKET, COPPER	1
16264-52140	GASKET, F/PUMP NA	1
04814-10160	O RING	1
04814-10070	O RING	1
15841-57212	GASKET, CONT.PLATE NA	1
15601-96650	GASKET, COPPER	2

1G755-99353 KIT GASKET U,D1703/1803,M *E2B		
P/N	DESCRIPTION	QTY
1G750-03312	GASKET CYLINDER HEAD	1
1A021-11882	GASKET INTAKE	1
15221-13153	SEALS IVALVE STEM	6
1A021-14523	GASKET HEAD COVER	1
1A021-05430	O RING	1
15841-53622	GASKET	3
19077-53650	HEAT SEAL	3
1A021-72920	GASKET FLANGE	1
16221-73270	GASKET THERMOSTAT	1
1A021-12350	GASKET EX-MANIFOLD	1

1G726-99364 KIT GASKET L,D1703/1803,M*E2B		
P/N	DESCRIPTION	QTY
15021-33660	GASKET	1
1A021-01620	OIL PAN GASKET	1
6C090-58660	GASKET	2
04817-00150	O RING	4

1G726-99364 KIT GASKET L,D1703/1803,M*E2B		
P/N	DESCRIPTION	QTY
04817-00220	O RING	2
19202-96830	O RING	1
1A021-04130	GASKET GEAR CASE	1
1A021-73330	GASKET RETURN FLANGE	1
1A091-04362	GASKET BEARING CASE	1
1A091-4820	GASKET CASE COVER	1
19202-04460	OIL SEAL	1
19202-04140	OIL SEAL	1
04811-10300	O RING	1
15521-04790	PACKING COVER	1
04817-00160	O RING	1
1A021-51660	GASKET PUMP COVER	1
1A021-35150	GASKET OIL PUMP	1
15221-96650	GASKET	2
1G751-52140	FUEL PUMP GASKET	1
04814-00060	O RING	1
04724-00140	GASKET	1
16691-57980	SEAL OIL	2
1A021-57212	GASKET PLATE	2
04814-06310	O RING	1
1A021-73430	GASKET WATER PUMP	1

1G464-99350 KIT GASKET U,V2003M *E2B		
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8
04817-50300	O RING	1
1G464-03310	GASKET, CYL.HEAD	1
1A091-11822	GASKET, IN-MANIFOLD NA	1
1A091-12350	GASKET, EX-MANIFOLD	1
1A091-12360	GASKET, EX-MANIFOLD NA	1
1G911-14523	GASKET, HEAD COVER	1
15841-53622	GASKET NA	4
19077-53650	SEAL, HEAT	4
1A021-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1

more...

[Back](#)

5-31

[Next](#)

Oct 1, 2008

Gasket Kit Contents

...continued

1G464-99360 KIT GASKET L,03M SERIES *E2B		
P/N	DESCRIPTION	QTY
1G780-01620	GASKET	1
6C090-58960	GASKET, DRAIN.OILPAN	1
04724-00160	GASKET, COPPER	1
15454-96670	GASKET, COPPER	2
04817-00150	O RING	1
04817-00220	O RING	2
04817-00360	O RING	1
1A021-04130	GASKET, GEARCASE NA	1
1A091-04362	GASKET, BEARING CASE	1
1A091-04820	GASKET, CASE COVER NA	1
1A091-04460	SEAL, OIL (WHEEL SIDE)	1
19202-04140	SEAL, OIL	1
04811-10300	O RING	1
04817-00160	O RING	1
1A021-51660	GASKET, PUMP COVER NA	1
1A021-35150	GASKET, OIL PUMP NA	1
14311-96750	O RING	1
1A051-16220	GASKET	1
1G751-52140	GASKET	1
15601-96650	GASKET, COPPER	2
04814-00060	O RING	1
04724-00140	GASKET	1
15471-57980	SEAL, OIL	2
1A021-57210	GASKET, PLATE	2
04814-06310	O RING	1
1A051-73430	GASKET, WATER PUMP	1
15021-33660	GASKET, COPPER	1
1A021-73330	GASKET, FLANGE NA	1
1G751-88130	GASKET	1

1G465-99350 KIT GASKET U, V2203/2403, M*E2B		
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8
04817-50300	O RING	1
1G790-03312	GASKET, CYL.HEAD	1
1A091-11822	GASKET, IN-MANIFOLD NA	1
1A091-12350	GASKET, EX-MANIFOLD	1
1A091-12360	GASKET, EX-MANIFOLD NA	1

1G465-99350 KIT GASKET U, V2203/2403, M*E2B		
P/N	DESCRIPTION	QTY
1G911-14523	GASKET, HEAD COVER	1
15841-53622	GASKET NA	4
19077-53650	SEAL, HEAT	4
1A021-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1

1G468-99350 KIT GASKET U, V2203MT *E2B		
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8
04817-50300	O RING	1
1G770-03312	GASKET, CYL.HEAD NA	1
1A091-11822	GASKET, IN/MANIFOLD	1
1A091-12350	GASKET, EX-MANIFOLD	1
1A091-12360	GASKET, EX-MANIFOLD NA	1
1G911-14523	GASKET, HEAD COVER	1
1G924-05430	O RING	1
15841-53622	GASKET NA	4
19077-53650	SEAL, HEAT	4
1A021-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1
16483-17100	GASKET NA	1
16483-17110	GASKET NA	1
1G557-96650	GASKET	1
1C020-96650	GASKET	1
1C040-33670	GASKET, OIL PIPE	1

1G469-99350 KIT GASKET U, D1503M *E2B		
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	6
04817-50300	O RING	1
1G720-03310	GASKET, CYL.HEAD NA	1
1A021-11822	GASKET, IN/MANIFOLD	1
1A021-12350	GASKET, EX/MANIFOLD	1
1A021-14523	GASKET, HEAD COVER	1
15841-53622	GASKET NA	4
19077-53650	SEAL, HEAT	3

more...

more...

Gasket Kit Contents

...continued

1G469-99350	KIT GASKET U, D1503M *E2B	
P/N	DESCRIPTION	QTY
1A021-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1

1G469-99360	KIT GASKET L, D1503/1703/1803 *E2B	
P/N	DESCRIPTION	QTY
1G841-01620	GASKET	1
6C090-58960	GASKET, DRAIN.OILPAN	1
04724-00160	GASKET, COPPER	1
15451-96670	GASKET, COPPER	2
04817-00150	O RING	1
04817-00220	O RING	2
04817-00360	O RING	1
1A021-04130	GASKET, GEAR CASE NA	1
1A091-04362	GASKET, BEARING CASE	1
1A091-04820	GASKET, CASE COVER NA	1
1G911-04460	SEAL, OIL(WHEEL SIDE)	1
19202-04140	SEAL, OIL	1
04811-10300	O RING	1
04817-00160	O RING	1
1A021-51660	GASKET, PUMP COVER NA	1
1A021-35150	GASKET, OIL PUMP NA	1
15221-96650	GASKET	2
14311-96750	O RING	1
1A051-16220	GASKET	1
1G751-52140	GASKET	1
15601-96650	GASKET, COPPER	1
04814-00060	O RING	1
04721-00140	GASKET	1
15471-57980	SEAL, OIL	2
1A021-57210	GASKET, PLATE	2
04814-06310	O RING	1
1A051-73430	GASKET, WATER PUMP	1
15021-33660	GASKET, COPPER	1
1A021-73330	GASKET, FLANGE NA	1
1G751-88130	GASKET	1

1G485-99350	KIT GASKET U [NHG] V2203/2403, MDI *E2B	
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8
04817-50300	O RING	1
1A091-11822	GASKET, IN-MANIFOLD NA	1
1A091-12350	GASKET, EX-MANIFOLD	1
1A091-12360	GASKET, EX-MANIFOLD NA	1
1G911-14523	GASKET, HEAD COVER	1
1C020-96730	GASKET	4
04814-00150	O RING	4
1G796-53620	GASKET	4
1A021-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1

1G485-99360	KIT GASKET L,03MDI SERIES *E2B	
P/N	DESCRIPTION	QTY
1G780-01620	GASKET	1
6C090-58960	GASKET,DRAIN.OILPAN	1
04724-00160	GASKET,COPPER	1
15451-96670	GASKET,COPPER	2
04817-00150	O RING	1
04817-00220	O RING	2
04817-00360	O RING	1

1G485-99360	KIT GASKET L,03MDI SERIES *E2B	
P/N	DESCRIPTION	QTY
1A021-04130	GASKET,GEAR CASE NA	1
1A091-04362	GASKET,BEARING CASE	1
1A091-04820	GASKET,CASE COVER NA	1
1G911-04460	SEAL,OIL(WHEEL SIDE)	1
19202-04140	SEAL,OIL	1
04811-10300	O RING	1
04817-00160	O RING	1
1A021-51660	GASKET,PUMP COVER NA	1
1A021-35150	GASKET,OIL PUMP NA	1
15331-96650	GASKET NA	2
15401-96650	WASHER,NIPPLE	2
15331-96660	PACKING	2
14311-96750	O RING	1

[more...](#)

Gasket Kit Contents

[...continued](#)

1G485-99360	KIT GASKET L,03MDI SERIES *E2B	
P/N	DESCRIPTION	QTY
1A051-16220	GASKET	1
1G751-52140	GASKET	1
15601-96650	GASKET,COPPER	2
04814-00060	O RING	1
04724-00140	GASKET	1
15471-57980	SEAL,OIL	2
1A021-57210	GASKET,PLATE	2
04814-06310	O RING	1
1A051-73430	GASKET,WATER PUMP	1
15021-33660	GASKET,COPPER	1
1A021-73330	GASKET,FLANGE NA	1
1G751-88130	GASKET	1

1G485-99350	KIT GASKET L,03MDI SERIES *E2B	
P/N	DESCRIPTION	QTY
1G780-01620	GASKET	1
6C090-58960	GASKET, DRAIN, OILPAN	1
04724-00160	GASKET, COPPER	1
15451-96670	GASKET, COPPER	2
04817-00150	O RING	1
04817-00220	O RING	2
04817-00360	O RING	1
1A021-04130	GASKET, GEAR CASE NA	1
1A091-04362	GASKET, BEARING CASE	1
1A091-04820	GASKET, CASE COVER NA	1
1G911-04460	SEAL, OIL(WHEEL SIDE)	1
19202-04140	SEAL, OIL	1
04811-10300	O RING	1
04817-00160	O RING	1
1A021-51660	GASKET, PUMP COVER NA	1
1A021-35150	GASKET, OIL PUMP NA	1
15331-96650	GASKET NA	2
15401-96650	WASHER, NIPPLE	2
15331-96660	PACKING	2
14311-96750	O RING	1
1A051-16220	GASKET	1
1G751-52140	GASKET	1
15601-96650	GASKET, COPPER	2
04814-00060	O RING	1

[...continued](#)

1G485-99350	KIT GASKET L,03MDI SERIES *E2B	
P/N	DESCRIPTION	QTY
04724-00140	GASKET	1
15471-57980	SEAL, OIL	2
1A021-57210	GASKET, PLATE	2
04814-06310	O RING	1
1A051-73430	GASKET, WATER PUMP	1
15021-33660	GASKET, COPPER	1
1A021-73330	GASKET, FLANGE NA	1
1G751-88130	GASKET	1

1G488-99350	KIT GASKET U[NHG] V2003MDIT *E2B	
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8
04817-50300	O RING	1
1A091-11822	GASKET, IN-MANIFOLD NA	1
1A091-12350	GASKET, EX-MANIFOLD	1
1A091-12360	GASKET, EX-MANIFOLD NA	1
1G911-14523	GASKET, HEAD COVER	1
1G924-05430	O RING	1
1C020-96730	GASKET	4
04814-00150	O RING	4
1G796-53620	GASKET	4
1A021-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
T007016420	GASKET, MUFFLER NA	1
16483-17100	GASKET NA	1
16483-17110	GASKET NA	1
1G557-96650	GASKET	1
1C020-96650	GASKET	1
1C040-33670	GASKET, OIL PIPE	1

1G526-99350	KIT GASKET U[NHG] V3300DI *E2B	
P/N	DESCRIPTION	QTY
1C020-14520	GASKET, HEAD COVER	1
1C020-11820	GASKET, IN-MANIFOLD	1
19258-12230	GASKET, MUFFLER NA	1
1C010-12352	GASKET, EX/MANIFOLD NA	1
1C010-72820	GASKET NA	1
1C020-73272	GASKET	1
04817-50300	O RING	1

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

1G526-99350	KIT GASKET U[NHG] V3300DI *E2B	
P/N	DESCRIPTION	QTY
1C020-96650	GASKET	1
1C010-13150	SEAL, VALVE STEM	8
1C010-13160	SEAL, VALVE	4
17105-33680	GASKET COPPER	4
1C050-11652	GASKET	1
1C020-96730	GASKET	5

1G526-99360	KIT GASKET L, V3300DI/V3800 *E2B	
P/N	DESCRIPTION	QTY
16264-52140	GASKET, F/PUMP NA	1
1C010-73430	GASKET NA	1
15451-96670	GASKET, COPPER	2
1C020-04140	SEAL, OIL	1
1C010-04460	SEAL, OIL	1
1C010-96960	O RING	2
1C010-51660	GASKET NA	1
1C010-51180	GASKET NA	1
1C010-04130	GASKET, CRANKCASE	1
19202-96830	O RING	1
04814-00200	O RING	1
04814-00240	O RING	1
15521-04790	PACKING, COVER	1
04814-00420	O RING	2
04814-00150	O RING	4
04814-05110	O RING	4
14321-53620	GASKET	4

1G533-99350	KIT GASKET U[NHG] V3300 *E2B	
P/N	DESCRIPTION	QTY
1C010-14520	GASKET, HEAD COVER	1
1C010-11820	GASKET, IN/MANIFOLD NA	1
19258-12230	GASKET, MUFFLER NA	1
1C010-12352	GASKET, EX/MANIFOLD NA	1
1C010-72820	GASKET NA	1
1C020-73272	GASKET	1
04817-50300	O RING	1
1C020-96650	GASKET	1
1C010-13150	SEAL, VALVE STEM	8
1C010-13160	SEAL, VALVE	4
17105-33680	GASKET COPPER	4

[...continued](#)

1G533-99350	KIT GASKET U[NHG] V3300 *E2B	
P/N	DESCRIPTION	QTY
1900-7350	HEAT SEAL	4

1G533-99360	KIT GASKET L,V3300 *E2B	
P/N	DESCRIPTION	QTY
1C010-16220	GASKET	1
16264-52140	GASKET, F/PUMP NA	1
1C010-73430	GASKET NA	1
15451-96670	GASKET, COPPER	2
1C020-04140	SEAL, OIL	1
1C010-04460	SEAL, OIL	1
1C010-96960	O RING	2
1C010-51660	GASKET NA	1
1C010-51180	GASKET NA	1
1C010-04130	GASKET, CRANKCASE	1
19202-96830	O RING	1
04814-00200	O RING	1
04814-00240	O RING	1
15521-04790	PACKING, COVER	1
04814-00420	O RING	2

1G556-99350	KIT GASKET U [NHG] V3300/V3800 DIT *E2B	
P/N	DESCRIPTION	QTY
1C020-14520	GASKET, HEAD COVER	1
1C020-11820	GASKET, IN-MANIFOLD	1
19258-12230	GASKET, MUFFLER NA	1
1C010-12352	GASKET, EX/MANIFOLD NA	1
1C010-72820	GASKET NA	1
1C020-73272	GASKET	1
04817-50300	O RING	1
1C020-96650	GASKET	1
1C010-13150	SEAL, VALVE STEM	8
1C010-13160	SEAL, VALVE	4
17105-33680	GASKET COPPER	4
1C050-11652	GASKET	1
1C020-96730	GASKET	5
1C040-17100	GASKET	1
1C040-33670	GASKET, OIL PIPE TC	1
1C040-17110	GASKET	1
1G557-96650	GASKET	1

[more...](#)
[more...](#)

Gasket Kit Contents

[...continued](#)

1G556-99350	KIT GASKET U [NHG] V3300/V3800 DIT *E2B	
P/N	DESCRIPTION	QTY
04817-00160	O RING	1

1G563-99350	KIT GASKET U[NHG] V3300T *E2B	
P/N	DESCRIPTION	QTY
1C010-14520	GASKET, HEAD COVER	1
1C010-11820	GASKET, IN/MANIFOLD NA	1
19258-12230	GASKET, MUFFLER NA	1
1C010-12352	GASKET, EX/MANIFOLD NA	1
1C010-72820	GASKET NA	1
1C020-73272	GASKET	1
04817-50300	O RING	1
1C020-96650	GASKET	1
1C010-13150	SEAL, VALVE STEM	8
1C010-13160	SEAL, VALVE	4
17105-33680	GASKET COPPER	4
1C040-17100	GASKET	1
1C040-17110	GASKET	1
1C040-33670	GASKET, OIL PIPE TC	1
1G557-96652	GASKET	1
04817-00160	O RING	1
19077-53650	HEAT SEAL	4

1G823-99353	KIT GASKET U,D902	
P/N	DESCRIPTION	QTY
11420-13150	SEAL, VALVE STEM	6
1G962-03310	GASKET, CYL. HEAD	1
1G962-11820	GASKET, IN/MANIFOLD	1
1G962-12350	GASKET, EX-MANIFOLD	1
1G962-14522	GASKET, HEAD COVER	1
04814-50300	O RING	1
15841-53622	GASKET NA	3
19077-53650	SEAL, HEAT	3
15841-72923	GASKET, W/FLANGE NA	1
16221-73270	GASKET	1
15263-12370	GASKET, MUFFLER.NA	1

1G829-99350	KIT GASKET U,Z602 *E2B	
P/N	DESCRIPTION	QTY
11420-13150	SEAL, VALVE STEM	4
1G460-03310	GASKET, CYL. HEAD	1

[...continued](#)

1G829-99350	KIT GASKET U,Z602 *E2B	
P/N	DESCRIPTION	QTY
1G460-11820	GASKET, IN/MANIFOLD	1
K2511-83270	GASKET, PREMUFFLER NA	1
1G460-12350	GASKET, EX-MANIFOLD	1
1G460-14520	GASKET, HEAD COVER	1
04814-50300	O RING	1
15841-53622	GASKET NA	2
19077-53650	SEAL, HEAT	2
15841-72923	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
15862-12230	GASKET, MUFFLER NA	1

1G957-99350	KIT GASKET U,Z482 *E2B	
P/N	DESCRIPTION	QTY
11420-13150	SEAL, VALVE STEM	4
16851-03310	GASKET, CYL.HEAD NA	1
15841-11820	GASKET NA	1
15263-12370	GASKET, MUFFLER.NA	1
16851-12360	GASKET	1
1G957-14520	GASKET, HEAD COVER	1
04814-50300	O RING	1
15841-53622	GASKET NA	2
19077-53650	SEAL, HEAT	2
15841-72923	GASKET, W/FLANGE NA	1
16851-73270	GASKET, T/COVER NA	1

1G957-99360	KIT GASKET L,Z482/D722 *E2B	
P/N	DESCRIPTION	QTY
15221-33700	O RING	1
16265-96670	PACKING	1
15881-73432	GASKET, WATER PUMP NA	1
15862-04132	GASKET, GEAR CASE NA	1
04814-06130	O RING	3
15877-04140	SEAL, OIL	1
15852-04360	GASKET, BRG. CASE NA	1
19215-99160	SEAL, OIL(WHEEL SIDE)	1
15841-04822	GASKET, CASE COVER.NA	1
04814-16220	O RING	1
04814-00160	O RING	1
16851-35152	GASKET, OIL PUMP NA	1
15601-96650	GASKET, COPPER	1

[more...](#)
[more...](#)

Gasket Kit Contents

...continued

1G957-99360	KIT GASKET L,Z482/D722 *E2B	
P/N	DESCRIPTION	QTY
16264-52140	GASKET, F/PUMP NA	1
04814-10160	O RING	1
04814-10070	O RING	1
15841-57212	GASKET, CONT. PLATE NA	1
15601-96650	GASKET, COPPER	2
19461-88132	GASKET, H/M. G/CASE.NA	1

1G958-99350	KIT GASKET U,D722 *E2B	
P/N	DESCRIPTION	QTY
11420-13150	SEAL, VALVE STEM	6
16871-03312	GASKET, CYLINDER HEAD	1
15861-11820	GASKET, MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.A	1
1G318-12350	GASKET, EX-MANIFOLD	1
1G958-14520	GASKET	1
04814-50300	O RING	1
15841-53622	GASKET NA	3
19077-53650	SEAL, HEAT	3
15841-72923	GASKET, W/FLANGE NA	1
16851-73270	GASKET, T/COVER NA	1

1G959-99362	GASKKIT GASKET L,Z602 *E2B	
P/N	DESCRIPTION	QTY
15221-33700	O RING	1
04724-00130	GASKET	1
16265-96670	GASKET, DRAIN.OILPAN	1
15881-73432	GASKET, WATER PUMP NA	1
1E125-04130	GASKET, GEAR CASE	1
04814-06130	O RING	3
15877-04140	SEAL, OIL	1
1G960-04360	GASKET, BRG CASE	1
1G460-04460	SEAL, OIL	1
15841-04822	GASKET, CASE COVER.NA	1
04814-16220	O RING	1
04814-00160	O RING	1
16851-35152	GASKET, OIL PUMP NA	1
04814-00090	O RING	1
15601-96650	GASKET, COPPER	1
16264-52140	GASKET, F/PUMP NA	1
04814-10160	O RING	1

...continued

1G959-99362	GASKKIT GASKET L,Z602 *E2B	
P/N	DESCRIPTION	QTY
04814-10070	O RING	1
15841-57212	GASKET, CONT.PLATE	1
15601-96650	GASKET, COPPER	2

1G960-99364	KIT GASKET L,D902 [KEA 2]	
P/N	DESCRIPTION	QTY
15221-33700	O RING	1
16265-96670	PACKING	1
15881-73432	GASKET, WATER PUMP NA	1
1E125-04130	GASKET, GEAR CASE	1
04814-06130	O RING	3
15877-04140	SEAL, OIL	1
1G960-04360	GASKET, BRG CASE	1
1G460-04460	SEAL, OIL	1
15841-04822	GASKET, CASE COVER.NA	1
04814-16220	O RING	1
04814-00160	O RING	1
16851-35152	GASKET, OIL PUMP NA	1
15601-96650	GASKET, COPPER	1
16264-52140	GASKET, F/PUMP NA	1
04814-10160	O RING	1
04814-10070	O RING	1
15841-57212	GASKET, CONT. PLATE NA	1
15601-96650	GASKET, COPPER	2

1G464-99350	KIT GASKET U,V2003M *E2B	
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8
04817-50300	O RING	1
1G464-03310	GASKET, CYL. HEAD	1
1A091-11822	GASKET, IN-MANIFOLD NA	1
1A091-12350	GASKET, EX-MANIFOLD	1
1A091-12360	GASKET, EX-MANIFOLD NA	1
1G911-14523	GASKET, HEAD COVER	1
15841-53622	GASKET NA	4
19077-53650	SEAL, HEAT	4
1A021-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1

more...

Gasket Kit Contents

...continued

1G468-99350 KIT GASKET U,V2003MT *E2B		
P/N	DESCRIPTION	QTY
04717-01000	WASHER, WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8
04817-50300	O RING	1
1G770-03312	GASKET, CYL. HEAD	1
1A091-11822	GASKET, IN-MANIFOLD NA	1
1A091-12350	GASKET, EX-MANIFOLD	1
1A091-12360	GASKET, EX-MANIFOLD NA	1
1G911-14523	GASKET, HEAD COVER	1
1G924-05430	O RING	1
15841-53622	GASKET NA	4
19077-53650	SEAL, HEAT	1
1A021-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1
16483-17100	GASKET NA	1
16483-17110	GASKET NA	1
1G557-96650	GASKET	1
1C020-96650	GASKET	1
1C040-33670	GASKET, OIL PIPE	1

1G962-99350 KIT GASKET U,D902 MRG		
P/N	DESCRIPTION	QTY
11420-13150	SEAL, VALVE STEM	6
1G962-03310	GASKET, CYL.HEAD	1
1G962-11820	GASKET, IN MANIFOLD	1
1G962-12350	GASKET, EX-MANIFOLD	1
1G962-14520	GASKET, HEAD COVER	1
04814-50300	O RING	1
1A021-05430	O RING	1
15841-53622	GASKET NA	3
19077-53650	SEAL, HEAT	3
15841-72923	GASKET, W/FLANGE NA	1
16221-73270	GASKET NA	1
15263-12370	GASKET, MUFFLER.NA	1

1G962-99360 KIT GASKET L,D902 [KEA 1]		
P/N	DESCRIPTION	QTY
15221-33700	O RING	1
16265-96670	PACKING	1
15881-73432	GASKET, WATER PUMP NA	1

1G962-99360 KIT GASKET L,D902 [KEA 1]		
P/N	DESCRIPTION	QTY
1E125-04130	GASKET, GEAR CASE	1
04814-06130	O RING	3
15877-04140	SEAL, OIL	1
15852-04360	GASKET, BRG CASE	1
1G460-04460	SEAL, OIL	1
15841-04822	GASKET, CASE COVER NA	1
04814-16220	O RING	1
04814-00160	O RING	1
16851-35152	GASKET, OIL PUMP NA	1
15601-96650	GASKET, COPPER	1
16264-52140	GASKET, F/PUMP NA	1
04814-10160	O RING	1
04814-10070	O RING	1
15841-57212	GASKET, CONT. PLATE NA	1
15601-96650	GASKET, COPPER	2

1G970-99350 KIT GASKET U,V2003T *E2B		
P/N	DESCRIPTION	QTY
04717-01000	WASHER WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8
04817-50300	O RING	1
1E013-03312	GASKET, CYL.HEAD NA	1
1A091-11822	GASKET, IN-MANIFOLD NA	1
1A091-12350	GASKET, EX-MANIFOLD	1
1A091-12360	GASKET, EX-MANIFOLD NA	1
15471-14520	PACKING, HEAD COVER	1
15841-53622	GASKET NA	4
19077-53650	SEAL, HEAT	4
1A021-72920	GASKET, W/FLANGE NA	1
04717-02150	WASHER WITH RUBBER	1
16221-73270	GASKET, THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1
16483-17100	GASKET NA	1
16483-17110	GASKET NA	1
1G557-96650	GASKET	1
1C020-96650	GASKET	1
1C040-33670	GASKET, OIL PIPE	1

more...

Gasket Kit Contents

...continued

1G971-99350	KIT GASKET U, D1403 *E2B	
P/N	DESCRIPTION	QTY
04717-01000	WASHER WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	6
04817-50300	O RING	1
16427-03310	GASKET CYL HEAD NA	1
1A021-11822	GASKET, IN/MANIFOLD	1
1A021-12350	GASKET, EX/MANIFOLD	1
1A021-14523	GASKET, HEAD COVER	1
15841-53622	GASKET NA	3
19077-53650	SEAL, HEAT	3
1A021-72920	GASKET, W/FLANGE NA	1
04717-02150	WASHER WITH RUBBER	1
16221-73270	GASKET THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1

1G971-99362	KIT GASKET L,D1403/1703 *E2B	
P/N	DESCRIPTION	QTY
1G841-01620	GASKET	1
6C090-58960	GASKET, DRAIN OILPAN	1
04724-00160	GASKET COPPER	1
04817-00150	O RING	2
04817-00200	O RING	1
04817-00360	O RING	1
15766-04132	GASKET, GEAR CASE NA	1
1A091-04362	GASKET, BEARING CASE	1
1A091-04820	GASKET, CASE COVER NA	1
1G911-04460	SEAL, OIL (WHEEL SIDE)	1
19202-04140	SEAL, OIL	1
04811-10300	O RING	1
04817-00160	O RING	1
04817-50300	O RING	1
15472-54550	GASKET NA	1
1A021-35150	GASKET, OIL PUMP NA	1
15221-96650	GASKET	2
14311-96750	O RING	1
1A051-16220	GASKET	1
1G751-52140	GASKET	1
15601-96650	GASKET, COPPER	2
15021-33660	GASKET, COPPER	2
04817-00120	O RING	1

1G971-99362	KIT GASKET L,D1403/1703 *E2B	
P/N	DESCRIPTION	QTY
1E147-57210	GASKET, S/CONTROL NA	1
15471-57980	SEAL, OIL	1
1A021-51660	GASKET, PUMP COVER NA	1
15766-73430	GASKET, W.PUMP NA	1
15021-33660	GASKET, COPPER	1
15221-33700	O RING	1
1A021-73330	GASKET, FLANGE NA	1
1G751-88130	GASKET	1

1G972-99350	KIT GASKET U,D1703 *E2B	
P/N	DESCRIPTION	QTY
04717-01000	WASHER,WITH RUBBER	1
15221-13153	SEAL,VALVE STEM	6
04817-50300	O RING	1
16487-03310	GASKET,CYL.HEAD NA	1
1A021-11822	GASKET,IN/MANIFOLD	1
1A021-12350	GASKET,EX/MANIFOLD	1
1A021-14523	GASKET,HEAD COVER	1
15841-53622	GASKET NA	3
19077-53650	SEAL,HEAT	3
1A021-72920	GASKET,W/FLANGE NA	1
04717-02150	WASHER WITH RUBBER	1
16221-73270	GASKET THERMOSTAT	1
T0070-16420	GASKET,MUFFLER NA	1

1G974-99350	KIT GASKET U,V1903 *E2B	
P/N	DESCRIPTION	QTY
04717-01000	WASHER,WITH RUBBER	1
15221-13153	SEAL,VALVE STEM	8
04817-50300	O RING	1
16454-03310	GASKET CYL.HEAD NA	1
1A091-11822	GASKET,IN-MANIFOLD NA	1
1A091-12350	GASKET,EX-MANIFOLD	1
1A091-12360	GASKET,EX-MANIFOLD NA	1
1G911-14523	GASKET,HEAD COVER	1
15841-53622	GASKET NA	4
19077-53650	SEAL,HEAT	4
1A021-72920	GASKET,W/FLANGE NA	1
04717-02150	WASHER WITH RUBBER	1
16221-73270	GASKET THERMOSTAT	1

more...

more...

Gasket Kit Contents

[...continued](#)

1G974-99350 KIT GASKET U,V1903 *E2B		
P/N	DESCRIPTION	QTY
T0070-16420	GASKET,MUFFLER NA	1

1G974-99362 KIT GASKET L,D1403/1703 *E2B		
P/N	DESCRIPTION	QTY
1G780-01620	GASKET	1
6C090-58960	GASKET, DRAIN.OILPAN	1
04724-00160	GASKET, COPPER	1
04817-00150	O RING	1
04817-00200	O RING	1
04817-00360	O RING	1
15766-04132	GASKET, GEAR CASE NA	1
1A091-04362	GASKET, BEARING CASE	1
1A091-04820	GASKET, CASE COVER NA	1
1G911-04460	SEAL, OIL (WHEEL SIDE)	1
19202-04140	SEAL, OIL	1
04811-10300	O RING	1
04817-00160	O RING	1
04817-50300	O RING	2
15472-54550	GASKET NA	1
1A021-35150	GASKET, OIL PUMP NA	1
15401-96650	WASHER, NIPPLE	2
14311-96750	O RING	1
1A051-16220	GASKET	1
1G751-52140	GASKET	1
15601-96650	GASKET, COPPER	2
15021-33660	GASKET, COPPER	2
04817-00120	O RING	1
1E147-57210	GASKET, S/CONTROL NA	1
1547-57980	SEAL, OIL	1
1A021-51660	GASKET, PUMP COVER NA	1
15766-73430	GASKET, W/PUMP NA	1
15021-33660	GASKET, COPPER	1
15221-33700	O RING	1
1A021-73330	GASKET, FLANGE NA	1
1G751-88130	GASKET	1

1G975-99350 KIT GASKET U,V2003 *E2B		
P/N	DESCRIPTION	QTY
04717-01000	WASHER WITH RUBBER	1
15221-13153	SEAL, VALVE STEM	8

[...continued](#)

1G975-99350 KIT GASKET U,V2003 *E2B		
P/N	DESCRIPTION	QTY
04817-50300	O RING	1
19077-03310	GASKET, CYL.HEAD NA	1
1A091-11822	GASKET, IN-MANIFOLD NA	1
1A091-12350	GASKET, EX-MANIFOLD	1
1A091-12360	GASKET, EX-MANIFOLD NA	1
1G911-14523	GASKET, HEAD COVER	1
15841-53622	GASKET NA	4
19077-53650	SEAL, HEAT	4
1A021-72920	GASKET, W/FLANGE NA	1
04717-02150	WASHER WITH RUBBER	1
16221-73270	GASKET, THERMOSTAT	1
T0070-16420	GASKET, MUFFLER NA	1

1G986-99350 KIT GASKET U,V1305 *E2B		
P/N	DESCRIPTION	QTY
1G078-03310	GASKET, CYLINDER HEAD	1
16241-14520	GASKET, HEAD COVER.NA	1
16241-11820	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16299-12360	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15951-96660	GASKET, COPPER	4
1C010-13150	SEAL, VALVE STEM	8
19077-53650	HEAT SEAL	4

1G986-99362 KIT GASKET L,V1305/1505 *E2B		
P/N	DESCRIPTION	QTY
16252-01630	GASKET OIL PAN NA	
16264-04130	GASKET, G/CASE NA	
16264-04360	GASKET, BRG. CASE NA	
16264-04820	GASKET, BRG. CASE NA	
16264-52140	GASKET, F/PUMP NA	
16264-57210	GASKET NA	
16239-73430	GASKET, WATER PUMP NA	
16299-56260	GASKET NA	
16264-88130	GASKET NA	
15601-96650	GASKET, COPPER	
6C090-58960	GASKET, DRAIN.OILPAN	

[more...](#)
[more...](#)

Gasket Kit Contents

...continued

1G986-99362	KIT GASKET L,V1305/1505 *E2B	
P/N	DESCRIPTION	QTY
16265-69970	GASKET, DRAIN.OILPAN	
15841-53622	GASKET NA	
16241-04212	SEAL, OIL	
16285-04460	SEAL, OIL	

1G987-99350	KIT GASKET U,D1105 *E2B	
P/N	DESCRIPTION	QTY
1G040-03310	GASKET, CYLINDER HEAD	1
16261-14520	GASKET, HEAD COVER	1
16261-11822	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16261-12350	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15951-96660	GASKET, COPPER	3
1C010-13150	SEAL, VALVE STEM	6
19077-99350	HEAT SEAL	3

1G992-99350	KIT GASKET U,V1505T *E2B	
P/N	DESCRIPTION	QTY
16394-03310	GASKET, CYL.HEAD NA	1
16241-14520	GASKET, HEAD COVER.NA	1
16241-11820	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16299-12360	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15951-96660	GASKET, COPPER	3
04724-00100	GASKET, COPPER	1
1c010-13150	SEAL, VALVE STEM	8
04724-00120	GASKET, COPPER	1
16292-17100	GASKET NA	1
16292-17110	GASKET, 2 NA	1
15471-96650	PACKING	2
1c040-33670	GASKET, OIL PIPE TC	BLANK
15471-96650	PACKING	2
15841-53620	GASKET	4
19077-53650	SEAL, HEAT	4

1G993-99350	KIT GASKET U,D1105T *E2B	
P/N	DESCRIPTION	QTY
1G063-03310	GASKET	1
16261-14520	GASKET, HEAD COVER	1
1E038-11820	GASKET NA	1
15263-12370	GASKET, MUFFLER.NA	1
16261-12350	GASKET, E-MANIFOLD NA	1
16264-72920	GAKSET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15951-96660	GASKET, COPPER	1
1C010-13150	SEAL, VALVE STEM	1
16292-17100	GASKET NA	3
16292-17110	GASKET, 2 NA	1
15471-96650	GASKET, COPPER	1
1C040-33670	GASKET, OIL PIPE	8
19077-53650	HEAT SEAL	4

1G994-99350	KIT GASKET U,V1105 *E2B	
P/N	DESCRIPTION	QTY
16394-03310	GASKET, CYL.HEAD NA	1
16241-14520	GASKET, HEAD COVER.NA	1
16241-11820	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER.NA	1
16299-12360	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15951-96660	GASKET, COPPER	3
04724-00100	GASKET, COPPER	1
04724-00120	GASKET, COPPER	1
1C010-13150	SEAL, VALVE STEM	8
19077-53650	HEAT SEAL	4

1G995-99350	KIT GASKET U,D1105 *E2B	
P/N	DESCRIPTION	QTY
1G063-03310	GASKET	1
16261-14520	GASKET, HEAD COVER	1
16261-11822	GASKET, IN-MANIFOLD NA	1
15263-12370	GASKET, MUFFLER. NA	1
16261-12350	GASKET, E-MANIFOLD NA	1
16264-72920	GASKET, W/FLANGE NA	1

[more...](#)

Gasket Kit Contents

...continued

1G995-99350	KIT GASKET U,D1105 *E2B	
P/N	DESCRIPTION	QTY
16221-73270	GASKET, THERMOSTAT	1
04814-50300	O RING	1
15951-96660	GASKET, COPPER	3
1C010-13150	SEAL, VALVE STEM	6
19077-53650	HEAT SEAL	3

1G995-99362	KIT GASKET L,D905/1005/1105 *E2B	
P/N	DESCRIPTION	QTY
16264-04130	GASKET, G/CASE NA	1
16264-04360	GASKET, BRG.CASE NA	1
16264-04820	GASKET, BRG.CASE NA	1
16264-52140	GASKET, F/PUMP NA	1
16264-57210	GASKET NA	1
16239-73430	GASKET, WATER PUMP NA	1
16264-88130	GASKET NA	1
16299-56260	GASKET NA	1
15601-96650	GASKET, COPPER	6
6C090-58960	GASKET, DRAIN.OILPAN	1
15451-96670	GASKET, COPPER	1
15841-53622	GASKET NA	3
16241-04212	SEAL, OIL	1
16285-04460	SEAL, OIL	1

EG511-99330	KIT GASKET U,WG/DF972 *E2	
P/N	DESCRIPTION	QTY
EG605-13160	GASKET	6
EG561-03312	GASKET, HEAD	1
EG561-11820	GASKET, IN/MANIFOLD	1
12581-11830	GASKET	1
12581-11840	GASKET	1
15263-12370	GASKET, MUFFLER.NA	1
1G962-12350	GASKET, EX-MANIFOLD	1
1A021-05430	O RING, BREATHER	1
1G962-14522	GASKET, HEAD COVER	1
04814-50300	O RING	1
12035-46110	GASKET, CARBURETOR.NA	2
EG261-11510	GASKET, A/C NA	1
15841-72923	GASKET, W/FLANGE NA	1
16221-73270	GASKET, THERMOSTAT	1

EG511-99340	KIT GASKET L,WG/DF972 *E2	
P/N	DESCRIPTION	QTY
15221-33700	O RING	1
6C090-58960	GASKET, DRAIN.OILPAN	1
15881-73432	GASKET, WATER PUMP NA	1
1E125-04130	GASKET, GEAR CASE	1
04814-06130	O RING	3
15877-04140	SEAL, OIL	1
15852-04360	GASKET, BRG.CASE NA	1
1G460-04460	SEAL, OIL	1
15841-04822	GASKET, BRG.CASE NA	1
04814-16220	SEAL, OIL	1
04814-00160	GASKET, CASE COVER.NA	1
16851-35152	O RING	1
EG281-51660	O RING	1
15601-96650	GASKET, OIL PUMP NA	1
16264-52140	GASKET, CYL HEAD	1
04714-00060	GASKET, COPPER	1
12581-55850	GASKET, F/PUMP NA	1
15841-57212	PACKING	1
EG281-56340	SEAL, OIL	1
15601-96650	GASKET, CONT.PLATE NA	1
EG281-56340	GASKET NA	1
15601-96650	GASKET, COPPER	4

EG601-99330	KIT GASKET U,WG/DF752 *E2	
P/N	DESCRIPTION	QTY
11420-13150	SEAL, VALVE STEM	6
EG601-03310	GASKET	1
EG601-11820	GASKET, INLET	1
12581-11830	GASKET	1
12581-11840	GASKET	1
15263-12370	GASKET, MUFFLER.NA	1
15862-12350	GASKET, EX-MANIFOLD NA	1
16861-14522	GASKET, HEAD COVER	1
17524-05130	GASKET, BREATHER NA	2
15601-96650	GASKET, COPPER	3
04814-50300	O RING	1
12035-46110	GASKET, CARBURETOR.NA	2
EG261-11510	GASKET, A/C NA	1
15841-72923	GASKET, W/FLANGE NA	1

[more...](#)

Gasket Kit Contents

...continued

EG601-99330		KIT GASKET U,WG/DF752 *E2
P/N	DESCRIPTION	QTY
16851-73270	GASKET, T/COVER NA	1

EG601-99340		KIT GASKET L,WG/DF752 *E2
P/N	DESCRIPTION	QTY
6C090-58960	GASKET, DRAIN.OILPAN	1
15881-73432	GASKET, WATER PUMP NA	1
15862-04132	GASKET, GEAR CASE NA	1
04814-06130	O RING	3
15877-04140	SEAL, OIL	1
15852-04360	GASKET, BRG.CASE NA	1
1G460-04460	SEAL, OIL	1
15841-04822	GASKET, CASE COVER.NA	1
04814-16220	O RING	1
04814-00160	O RING	1
16851-35152	GASKET, OIL PUMP NA	1
EG281-51660	GASKET NA	1
15601-96650	GASKET, COPPER	1
16264-52140	GASKET, F/PUMP NA	1
12581-55850	SEAL, OIL	1
15841-57212	GASKET, CONT. PLATE NA	1
EG281-56340	GASKET NA	1
15601-96650	GASKET, COPPER	4

Gasket Kit Notes

Parts Manager's Notes:

Bulletins & Other:

New Parts Numbers:

This page has been left blank intentionally.

Section 6 - Option Kits

Typical Page	6-1
Option Kits Index	6-2
Rad Option Kit Contents	6-8
Air Cleaner Option Kit Contents	6-38
Fuel Filter Option Kit Contents	6-46
Muffler Option Kit Contents	6-48
Complete Accessories Kit Contents	6-54

Typical Page (Option Kits)

MODEL		KIT REFERENCE NUMBERS			
KIT ID	TYPE	MODEL CODE	PART NUMBER	NOTES	PAGE NUMBER
A01	RADIATOR	19031-72002	19426-72004		
A02	RADIATOR	19091-72003	19427-72005		
STEP 1 ↓	RADIATOR	19091-72004	19428-72005		STEP 2 ↓ PAGE 49
	RADIATOR	19091-72010	19418-72004		
	RADIATOR	19091-72005	19427-72005		
A06	RADIATOR	19091-72006	19438-72005		
A07	RADIATOR	19091-72011	19416-72006		
A08	RADIATOR	19091-72001	19412-72007		
A09	RADIATOR	19091-72012	19608-72002		
A10	RADIATOR	19091-72007	19607-72002		
A11	RADIATOR	19091-72008	19681-72003		
A12	RADIATOR	19091-72009	19682-72003		

A02	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19427-72060	RADIATOR ASSY.	1	
15531-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19427-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	
15401-72710	PIPE, WATER OVERFLOW	1	^
15409-54610	LABEL (RADIATOR)	1	^
15531-72850	RADIATOR HOSE (LOWER)	1	^
19269-72940	RADIATOR HOSE (UPPER)	1	

[Option Kits Index >>](#)

An arrow in the NOTE column denotes the part is an assembly

STEP 1 - If kit ID is known, look under ID column. If only part number is known look under the part number column

STEP 2 - Once kit is found refer to page number which kit information will be found

STEP 3 - Locate the kit on corresponding page to find contents of kit.

Option Kits Index

MODEL		KIT REFERENCE NUMBER				
KIT ID	TYPE	APPLICABLE UNIT	PART	KIT	NOTES	PAGE
A01	RADIATOR	Z600/ZH600	19426-72004	64		6-8
A02	RADIATOR	D850/950	19427-72005	65		6-8
A03	RADIATOR	V1100/1200	19428-72005	66		6-8
A04	RADIATOR	S2800	19418-72004	72		6-9
A05	RADIATOR	D850/950	19427-72005	65		6-9
A06	RADIATOR	VH1100	19438-72005	68		6-10
A07	RADIATOR	D1403	19416-72006	73		6-10
A08	RADIATOR	D1703/V1903	19412-72007	63		6-11
A09	RADIATOR	D3200	19608-72002	74		6-11
A10	RADIATOR	V4300	19607-72202	69		6-11
A11	RADIATOR	Z600	19681-72003	70		6-12
A12	RADIATOR	D950	19682-72003	472		6-12
A13	RADIATOR	V1200	19684-72003	263		6-13
A14	RADIATOR	D3502	16631-72003	192		6-13
A15	RADIATOR	V4702	16632-72003	193		6-13
A16	RADIATOR	V2203	16662-72005	244		6-14
A17	RADIATOR	D9/10/1105/V12/1305	16625-72001	265		6-14
A18	RADIATOR	V1505	16626-72001	266		6-15
A19	RADIATOR		19091-72059			6-15
A20	RADIATOR	V12/13/1505	16685-72001	352		6-16
A21 X	RADIATOR	V1505	16292-72001	349		6-16
A22	RADIATOR	V1505	1E035-72001	435		6-16
A23	RADIATOR	Z602	1G951-72001	485	NO MOUNTS	6-17
A24	RADIATOR	D902	1G952-72001	486	NO MOUNTS	6-17
A25	RADIATOR	D722	1G639-72001	488		6-18
A26	RADIATOR	Z482	1G637-72001	487		6-18
A27	RADIATOR	D9/10/1105/05T/1305	1G690-72001	490	WITH MOUNTS	6-19
A28	RADIATOR	V1505	1G698-72001	491	WITH MOUNTS	6-19
A31	RADIATOR	Z600/ZH600	19056-72001	81		6-20
A32	RADIATOR	D850/950	19057-72001	82		6-20
A33	RADIATOR	V1100/1200	19066-72001	83		6-20
A34	RADIATOR	Z482	1G957-72001	510		6-20
A35	RADIATOR	D1403	19273-72001	145		6-21
A36	RADIATOR	D1703/V1903	19228-72001	144		6-21
A37	RADIATOR	D850	19295-72001	122		6-21
A38	RADIATOR	V1100/1200	15743-72001	123		6-21
A39	RADIATOR	S2800	19258-72001	172		6-22
A40	RADIATOR	19091-72103	1G958-72001			6-22

[more...](#)

Option Kits Index

...continued

MODEL		KIT REFERENCE NUMBER				
KIT ID	TYPE	APPLICABLE UNIT	PART	KIT	NOTES	PAGE
A41	RADIATOR	D9/10/1105/V1305	1G996-72001	512		6-22
A42	RADIATOR	Z482	16687-72001	371		6-23
A43	RADIATOR	Z482/D662/D722	16873-72001	376		6-23
A44	RADIATOR	D662/D722	16676-72003	377		6-24
A46	RADIATOR	V1505	1G994-72001	513		6-24
A47	RADIATOR	V1505T	1G992-72001	514		6-24
A48	RADIATOR	D1403BG	1G981-72001	515		6-25
A49	RADIATOR	D1703/V1903	1G972-72001	516		6-25
A50	RADIATOR	V2203	1G975-72001	517		6-26
A51	RADIATOR	V9053D1005/V1105	16266-72002	185		6-26
A52	RADIATOR	V1205/V1305	16256-72002	186		6-27
A53	RADIATOR	V1505	16286-72003	187		6-27
A54	RADIATOR	1505	16296-72001	349		6-27
A55	RADIATOR	D905/D1005/D1105	16613-72002	194		6-27
A56	RADIATOR	V1205/V1305	16615-72001	195		6-28
A57	RADIATOR	V1205/V1305/V1505	16616-72001	196		6-28
A58	RADIATOR	V1205	16617-72001	197		6-28
A59	RADIATOR	V1205/V1305	16679-72002	272		6-29
A60	RADIATOR	V1505	16678-72002	273		6-29
A65	RADIATOR	19091-72102	1G976-72062			6-29
A66	RADIATOR	V2203BG	1G985-72001	519		6-30
A69	RADIATOR	D17/18/2003M/V22/2403MDI	1G940-72001	478		6-30
A70	RADIATOR	V2203M/V2403M/2003MT	1G942-72001	479		6-30
A71	RADIATOR	V2203	19077-72001	199		6-31
A72	RADIATOR	F2803	16484-72002	161		6-31
A73	RADIATOR	V2203	16665-72005	253		6-31
A74	RADIATOR	D1403/V1903	16444-72001	275		6-32
A80	RADIATOR	D17/1803MIDI/V22/24/2003MDI	1G930-72001	471	WITH MOUNTS	6-32
A81	RADIATOR	V2203MID/V2403MDI/2003MDI	1G932-72001	472	NO MOUNTS	6-32
AI	RADIATOR	905/1005/1105/1305	1G660-72001	482	NO MOUNTS	6-33
AI	RADIATOR	V1505BG	1G665-72001	483	NO MOUNTS	6-33
AI	RADIATOR	V1505T	1G666-72001	484	NO MOUNTS	6-33
AI	RADIATOR	Z602	1G961-72001	492	NO MOUNTS	6-34
AI	RADIATOR		1G962-72001			6-34
KCL	RADIATOR	Z482/Z602	KSMRAD2			6-34
KCL	RADIATOR	D722/WG/DF752/WG/DF972	KSMRAD4			6-34
KCL	RADIATOR	WG/DF1005/D9/10/1105	K05RAD2			6-35
KCL	RADIATOR	ALL 03	K03RAD2		SAME FOR BGS	6-37
KCL	RADIATOR	V1305/V1505	K05RAD4			6-35

Option Kits Index

...continued

MODEL		KIT REFERENCE NUMBER				
KIT ID	TYPE	APPLICABLE UNIT	PART	KIT	NOTES	PAGE
KCL	RADIATOR	D9/D10/1105BG/D1105T	K05BGTRAD2			6-36
KCL	RADIATOR	V1305BG/BV1505BG/V1505T	K05BGTRAD4			6-36
KCL	RADIATOR	ALL 03M	K03MRAD3			6-37
KCL	RADIATOR	V3300/V3300T	KV33TRAD			6-37
KCL	RADIATOR	V3800/V3800T	KV38TRAD			6-37
KCL	MOUNTS	KSMRAD2	1G957-72101	R8	MOUNTS ONLY	6-34
KCL	MOUNTS	KSMRAD4	1G958-72101	R2	MOUNTS ONLY	6-35
KCL	MOUNTS	K05RAD2	1G996-72101	R4	MOUNTS ONLY	6-35
KCL	MOUNTS	K05RAD4	1G994-72101	R5	MOUNTS ONLY	6-35
KCL	MOUNTS	K05BGTRAD2	1G976-72101	R6	MOUNTS ONLY	6-36
KCL	MOUNTS	K05BGTRAD4	1G964-72101	R7	MOUNTS ONLY	6-36
KCL	MOUNTS	K03RAD2/K03RAD3	1G985-72101	R3	MOUNTS ONLY	6-37
KCL	MOUNTS	KV33TRAD	KV33TRS			6-37
KCL	MOUNTS	KV38TRAD	KV38TRS		HIGH MOUNT	6-37
B01	AIR	Z600/ZH600	19426-11003	48		6-38
B02	AIR	D850/DH850/D950	19427-11003	49		6-38
B03	AIR	V1100/VH100/V1200	19428-11004	45		6-38
B04	AIR	S2800	19418-11004	44		6-38
B05	AIR	D1402	19416-11006	43		6-39
B06	AIR	D1702/V1902	19412-11007	42		6-39
B07	AIR	D3502	19608-11002	47		6-39
B08	AIR	V4300	19607-11002	46		6-39
B10	AIR	D1403/D1703	17298-11003	345		6-40
B11	AIR	V2203	16604-11004	277		6-40
B12	AIR	V2203	16662-11004	245		6-40
B13	AIR	V2003	1E013-11001	432		6-41
B31	AIR	V1100/VH100/V1200	19066-11001	86		6-41
B32	AIR	D1403/D1703	19273-11001	148		6-41
B33	AIR	D1702/V1902/D1703/V1903	19228-11002	147		6-41
B34	AIR		15621-11011			6-41
B42	AIR	Z482/D662/D722	16689-10901	373		6-42
B43	AIR	D662/D722	16873-10901	375		6-42
B44	AIR	D722	1G659-10901	464	REAR CYL	6-42
B45	AIR	Z482	1G657-10901	465	REAR CY;	6-42
B46	AIR	Z482/D722	1G639-10901	470	SIDE MOUNT	6-43
B47	AIR	Z602/Z902	1G952-10901	469		6-43
B48	AIR	WG972/DF972	EG561-11001	496		6-43

more...

Option Kits Index

...continued

MODEL		KIT REFERENCE NUMBER				
KIT ID	TYPE	APPLICABLE UNIT	PART	KIT	NOTES	PAGE
B51	AIR	D905/D1005/D1105	16613-11002	180		6-43
B52	AIR	V1205/V1305/V1505	16616-11002	181		6-44
B53	AIR	V1205T/V1505T	16617-11002	207		6-44
B54	AIR	D9/10/1105/V12/13/1505	16615-11002	198		6-44
B54G	AIR	WG1005/DF1005	EG121-11001	462	REAR CYL	6-44
B71	AIR	V2203	19077-11004	200		6-44
B72	AIR	F2803	16454-11003	264		6-45
B73	AIR	D1403/D1703	16414-11003	274		6-45
N/A	AIR	D1402-D1403	19404-11002	158		
N/A	AIR	70 MM SERIES	19016-11002	162		
N/A	AIR	D905/D1005/D1105	16266-11002	205		
N/A	AIR	V1205/V1305/V1505	16286-11002	206		
N/A	AIR	D722	19019-11002	288		
N/A	AIR	V1305/V1505	16686-11002	289		
N/A	AIR	V1903/V2203	16642-11002	290		
N/A	AIR	F2803	17301-11011	291		
N/A	AIR	Z482/D662/D722	32721-58205	442		
N/A	AIR	V2003T	15606-11010			
KCL	AIR	V2003T	<K03T4ACS	97		6-45
KCL	AIR	V3	<KV33AC	97		6-45
KCL	AIR	V3-T	<KV33TAC	97		6-45
KCL	AIR	V38	<KV38AC	97		6-46
KCL	AIR	V38-T	<KV38TAC	97		6-46
KCL	AIR	G02	G02	97		6-46
D02	FUEL	70 MM SERIES	19427-43002	62		6-46
D04	FUEL	D1402/V1702/V1902	19416-43001	61		6-46
D06	FUEL	D1403/D1703	17298-43003	346		6-46
D07	FUEL	D1403/D1703/V1903/2203	16604-43001	247		6-46
D08	FUEL	05 SERIES	16611-43001	262		6-46
D09	FUEL	05 SERIES	16612-43001	433		6-47
D10	FUEL	Z482/D722/Z602/D902	1G952-43001	480		6-47
D31	FUEL	Z482/D662/D722/D9/D10/D1105	19056-43002	87		6-47
D32	FUEL	D1403/D1703/V1903/V2203	19228-43003	194		6-47
D41	FUEL	Z482	16853-43001	374		6-47
D42	FUEL	D662/D722	16873-43001	378		6-47
D43	FUEL	Z482/D662/D722	16689-43001	379		6-48
D51	FUEL	D905/D1005/D1105	16613-43001	183		6-48
D52	FUEL	V1205/V1305/V1505/V1505T	16616-43001	154		6-48

more...

Option Kits Index

...continued

MODEL		KIT REFERENCE NUMBER				
KIT ID	TYPE	APPLICABLE UNIT	PART	KIT	NOTES	PAGE
N/A	FUEL		G3810-45001			
N/A	FUEL	ALL MODELS SEDIMENTER	16632-43001	338		6-48
N/A	FUEL	05 SEDIMENTER	16614-43001	442		6-48
C01	MUFFLER	Z600/ZH600/Z482/D722/Z602	19426-12002	52		6-48
C02	MUFFLER	D722/D905/D1005/D1105	19427-12002	53		6-49
C03	MUFFLER	D905/D1005/D1105	19428-12003	54		6-49
C05	MUFFLER	D1403/D1703/V1903/V2203	19418-12002	50		6-49
C06	MUFFLER	V2203	19851-12000	276		6-49
C31	MUFFLER	Z600/ZH600	19056-12001	84		6-49
C32	MUFFLER	D950/D850	19057-12001			6-50
C33	MUFFLER					6-50
C34	MUFFLER					6-50
C36	MUFFLER	D902	1G952-12001	446		6-50
C51	MUFFLER					6-50
C52	MUFFLER	V1205T	16617-12002	268		6-51
C72	MUFFLER	F2803	16484-12004	267		6-51
N/A	MUFFLER	S2800/D3200/V4300	19418-12002	51		6-51
N/A	MUFFLER	V800	19883-12001	124		6-51
N/A	MUFFLER	D850/DH850/D950	19496-12001	125		6-51
N/A	MUFFLER	ZB600	19219-12001	133		6-51
N/A	MUFFLER	D850/DH850/D950	19064-12001	142		6-52
N/A	MUFFLER	ZB600	14397-12001	151		6-52
N/A	MUFFLER	ZB600	19246-12001	152		6-52
N/A	MUFFLER	D1403	19275-12003	157		6-52
N/A	MUFFLER	V1205/V1305/V1505	19258-12001	260		6-52
N/A	MUFFLER	D9/D10/D1105/V12/V13/V1505	19286-12001	210		6-52
N/A	MUFFLER	V1205T	16296-12001	211		6-52
N/A	MUFFLER	V2203	19077-12003	240		6-52
N/A	MUFFLER	V2203	16662-12003	246		6-52
N/A	MUFFLER		16285-12004			6-52
N/A	MUFFLER	D905/D1005/D1105	16264-12003	309		6-53
N/A	MUFFLER	D1403/1703	16664-12002	312		6-53
N/A	MUFFLER	F2803	17559-12004	314		6-53
N/A	MUFFLER	D1403/D1703	17298-12002	347		6-53
N/A	MUFFLER		1G952-12001			6-53
N/A	MUFFLER	DF & WG 1005	E9122-12001	461	SIDE OUTLET	6-53
N/A	MUFFLER	DF & WG 972	EG561-12001	495		6-54
N/A	MUFFLER	V3300T/V3800	KV3MFLR			6-54

more...

Option Kits Index

...continued

MODEL		KIT REFERENCE NUMBER				
KIT ID	TYPE	APPLICABLE UNIT	PART	KIT	NOTES	PAGE
E01	KEY SWITCH	ALL MODELS	66706-55123	75		
E02	KEY SWITCH	ALL MODELS	1E013-63592	436		
E02G	KEY SWITCH	WG/ DF 972/ 1005	EG273-63591	463		
E51	KEY SWITCH	05 SERIES	16286-65001	188		
N/A	KEY SWITCH	ALL MODELS	16613-65001	420		
F08X	COMPLETE ACCY		12694-86107			6-54
F08XX	COMPLETE ACCY		12697-86106			6-55
F18X	COMPLETE ACCY	DF/WG972	EG601-86101			6-55
F18XX	COMPLETE ACCY	DF/WG972	EG603-86101			6-56
F19	COMPLETE ACCY	D722 PLASTIC AIR CLEANER	1G659-86101	476		6-56
F20	COMPLETE ACCY	Z482 PLASTIC AIR CLEARNER	1G657-86101	477		6-57
F28X	COMPLETE ACCY	DF/WG752 ALUMINIUM RAD	EG652-86101	506		6-59
F28XX	COMPLETE ACCY	DF/WG752 AL HIGH CAP RAD	EG602-86101	507		6-59
F31	COMPLETE ACCY	D722 ALUMINUM RAD	1G639-86101	476		6-60
F32	COMPLETE ACCY	Z482 ALUMNIUM RAD	1G637-86101	521		6-61

Option Kits

...continued

A01	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19426-72060	RADIATOR ASSY.	1	
15956-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19426-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
15409-54610	LABEL(RADIATOR)	1	
15531-72850	RADIATOR HOSE (LOWER)	1	
19426-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72382	BOLT	2	
05515-51000	PIN,SNAP	2	
19427-72130	SUPPORT1, RADIATOR	1	
19427-72140	SUPPORT2, RADIATOR	1	
01123-50822	BOLT	2	
19426-87880	LABLE, CAUTION	1	
19426-72250	NET, RADIATOR	1	
01023-50610	BOLT	4	
19426-74120	COVER, FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

A02	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19427-72060	RADIATOR ASSY.	1	
15531-72111	RADIATOR[NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19427-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
15409-54610	LABEL(RADIATOR)	1	

A02	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15531-72850	RADIATOR HOSE (LOWER)	1	
19269-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72382	BOLT	2	
05515-51000	PIN,SNAP	2	
19264-36180	CAP	1	
19271-16160	BAND	1	
19427-72130	SUPPORT1, RADIATOR	1	
19427-72140	SUPPORT2, RADIATOR	1	
19427-72160	STAY, RADIATOR 1	1	
19427-72170	STAY, RADIATOR 2	1	
01123-50822	BOLT	6	
19426-87880	LABLE, CAUTION	1	
19426-72250	NET, RADIATOR	1	
04014-50060	WASHER, PLAIN	4	
01053-50610	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

A03	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19428-72060	RADIATOR ASSY.	1	
15442-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19428-72330	SHROUD, FAN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	
15409-54610	LABEL(RADIATOR)	1	
15442-72850	RADIATOR HOSE (LOWER)	1	
19428-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	

more...

[more...](#)

Option Kits

[...continued](#)

A03	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15111-72190	WASHER	4	
15108-72382	BOLT	2	
05515-51000	PIN,SNAP	2	
19427-72130	SUPPORT1, RADIATOR	1	
19427-72140	SUPPORT2, RADIATOR	1	
19428-72160	STAY, RADIATOR	2	
01123-50822	BOLT	4	
19426-87880	LABEL, CAUTION	1	
19426-72250	NET, RADIATOR	1	
04015-50060	WASHER, PLAIN	6	
01023-50612	BOLT	6	
19428-74122	COVER, FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

A04	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19418-72060	RADIATOR ASSY.	1	^
19418-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19418-72330	SHROUD, FAN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	
15409-54610	LABEL(RADIATOR)	1	
19426-87880	LABEL, CAUTION	1	
15000-34390	DRAIN COCK	1	
15261-72850	RADIATOR HOSE (LOWER)	1	
15261-72940	RADIATOR HOSE (UPPER)	1	
15108-72870	BAND	2	
15001-72870	PIPE, BAND	2	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72382	BOLT	2	
15111-72202	WASHER	4	
05515-51000	PIN,SNAP	2	
19271-16150	CAP	1	
19271-16160	BAND	1	

[...continued](#)

A04	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15428-06113	ENGINE STAND	1	
19418-72130	SUPPORT, RADIATOR	2	
01123-51028	BOLT	2	
01123-51060	BOLT	2	
02156-50080	NUT	2	
04512-50100	WASHER, SPRING	2	
05012-01022	PIN, STRAIGHT	2	
01130-51022	BOLT	4	
19418-72250	NET, RADIATOR	1	
01023-50610	BOLT	4	
04014-50060	WASHER	4	
19418-74120	FAN COVER	1	
01053-50614	BOLT	5	
02056-50060	NUT	5	
04512-50060	WASHER, SPRING	5	
04014-50060	WASHER	10	
19418-72160	STAY, RADIATOR	1	
01123-50820	BOLT	1	
68131-43380	RUBBER CUSHION 3	1	
15403-91012	BOLT	2	
04512-50080	SPRING WASHER	2	

A05	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19427-72060	RADIATOR ASSY.	1	^
15531-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19427-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	
15401-72710	PIPE, WATER OVERFLOW	1	
15409-54610	LABEL(RADIATOR)	1	
15449-72850	RADIATOR HOSE (LOWER)	1	
19427-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	2	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72382	BOLT	2	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A05	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
05515-51000	PIN,SNAP	2	
15541-72960	BAND	2	
19427-72130	SUPPORT1, RADIATOR	1	
19427-72140	SUPPORT2, RADIATOR	1	
19427-72160	STAY, RADIATOR 1	1	
19427-72170	STAY, RADIATOR 2	1	
01123-50822	BOLT	6	
19426-87880	LABEL, CAUTION	1	
19426-72250	NET, RADIATOR	1	
04014-50060	WASHER, PLAIN	4	
01053-50610	BOLT	4	
19427-74120	COVER, FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

A06	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19428-72060	RADIATOR ASSY.	1	
15442-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19428-72330	SHROUD, FAN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15409-54610	LABEL(RADIATOR)	1	
15443-72850	RADIATOR HOSE (LOWER)	1	
19428-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72382	BOLT	2	
05515-51000	PIN,SNAP	2	
19427-72130	SUPPORT1, RADIATOR	1	
19427-72140	SUPPORT2, RADIATOR	1	
19438-72160	STAY, RADIATOR 1	1	
19438-72170	STAY, RADIATOR 2	1	

[...continued](#)

A06	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
01123-50822	BOLT	4	
19426-87880	LABEL, CAUTION	1	
19416-72250	NET, RADIATOR	1	
04015-50060	WASHER, PLAIN	6	
01023-50612	BOLT	6	
19428-74122	COVER, FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

A07	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19416-72060	RADIATOR ASSY.	1	
19416-72112	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19416-72330	SHROUD, FAN	1	^
15596-72710	PIPE, WATER	1	^
15471-72730	CLAMP, PIPE	1	^
16478-88230	LABEL(RADIATOR)	1	
19426-87880	LABEL(ANTIFREEZE)	1	
15521-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15521-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	PIN,SNAP	2	
15000-34390	DRAIN COCK	1	
19416-72130	SUPPORT1, RADIATOR	1	
19416-72140	SUPPORT2, RADIATOR	1	
19416-72150	STAY	1	
01153-50822	BOLT	4	
02156-50080	NUT	4	
04512-50080	WASHER, SPRING	4	
19416-72250	NET, RADIATOR	1	
01023-50612	BOLT	6	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A07	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
04015-50060	WASHER	6	
19416-74122	FAN COVER	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER	8	

A08	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19412-72060	RADIATOR ASSY.	1	^
19227-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19412-72330	SHROUD, FAN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABLE,ANTIFREEZE	1	
15471-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15471-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	PIN,SNAP	2	
15575-73100	DRAIN COCK	1	
19412-72130	SUPPORT1,RADIATOR	1	
19412-72140	SUPPORT2,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	BOLT	4	
02156-50080	NUT	4	
04512-50080	WASHER,SPRING	4	
19412-72250	NET,RADIATOR	1	
04014-50060	WASHER	6	
01023-50610	BOLT	6	
19412-74122	FAN COVER	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	

[...continued](#)

A08	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
04014-50060	WASHER	8	
19412-72160	STAY-A,RADIATOR	1	
19412-72170	STAY-B,RADIATOR	1	
01023-50622	BOLT	2	
01023-50614	BOLT	1	
04013-50060	WASHER	2	
68131-43380	RUBBER	1	
02156-50080	NUT	2	
04512-50080	WASHER,SPRING	2	
17298-97260	COLLAR	1	
01023-50648	BOLT	1	

A09	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15451-72060	RADIATOR ASSY.	1	
15701-72111	RADIATOR [NOT AVAIL]	1	^
15701-72030	ASSY CAP	1	^
15451-72330	SHROUD, FAN	1	^
15701-72710	PIPE, WATER OVERFLOW	1	^
01053-50612	BOLT	8	^
04512-50060	WASHER, SPRING LOCK	8	
04012-50060	WASHER, PLAIN	8	
15453-88610	LABEL,RADIATOR	1	
35170-94880	LABEL,CAUTION	1	
19426-87880	LABEL	1	
15701-72850	RADIATOR HOSE (LOWER)	1	
15701-72870	BAND, PIPE WATER	2	
15451-72940	RADIATOR HOSE (UPPER)	1	
15701-72870	BAND, PIPE WATER 2	2	
33251-17120	CUSHION	2	
36330-17310	SUPPORT,RADIATOR	1	
01133-51025	BOLT	2	
01133-51225	BOLT	2	

A10	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15481-72060	RADIATOR ASSY.	1	
15481-72111	RADIATOR[NOT AVAIL]	1	^
15701-72030	ASSY CAP	1	^
15571-72330	SHROUD, FAN	1	^

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A10	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15701-72710	PIPE, WATER OVERFLOW	1	^
15453-88610	LABEL,RADIATOR	1	
35170-94880	LABEL,CAUTION	1	
19426-87880	LABEL	1	
15701-72850	RADIATOR HOSE (LOWER)	1	
15701-72870	BAND, PIPE WATER	2	
15451-72940	RADIATOR HOSE (UPPER)	1	
15701-72960	BAND, PIPE WATER 2	2	
33251-17120	CUSHION	2	
36330-17310	SUPPORT,RADIATOR	1	
01133-51025	BOLT	2	
01133-51225	BOLT	2	
19271-16150	CAP	1	
19271-16160	BAND	1	

A11	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19426-72060	RADIATOR ASSY.	1	
15956-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19426-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
15409-54610	LABEL(RADIATOR)	1	
19426-87880	LABEL	1	
19484-72850	RADIATOR HOSE (LOWER)	1	
19426-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72382	BOLT	2	
05515-51000	PIN,SNAP	2	
19682-72130	SUPPORT1, RADIATOR	1	
19427-72140	SUPPORT2, RADIATOR	1	
19427-72160	STAY, RADIATOR 1	1	
19427-72170	STAY, RADIATOR 2	1	
01123-50822	BOLT	6	

[...continued](#)

A11	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19426-72250	NET, RADIATOR	1	
04015-50060	WASHER, PLAIN	4	
01023-50610	BOLT	4	
19426-74120	COVER, FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

A12	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19427-72060	RADIATOR ASSY.	1	
15531-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19427-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
15409-54610	LABEL(RADIATOR)	1	
19426-87880	LABEL	1	
19484-72850	RADIATOR HOSE (LOWER)	1	
19269-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72382	BOLT	2	
05515-51000	PIN,SNAP	2	
19264-36180	CAP	1	
19271-16160	BAND	1	
19682-72130	SUPPORT1, RADIATOR	1	
19427-72140	SUPPORT2, RADIATOR	1	
19427-72160	STAY, RADIATOR 1	1	
19427-72170	STAY, RADIATOR 2	1	
01123-50822	BOLT	6	
19426-72250	NET, RADIATOR	1	
04014-50060	WASHER, PLAIN	4	
01023-50610	BOLT	4	
19427-74120	COVER, FAN	1	

[more...](#)
[more...](#)

Option Kits

...continued

A12	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

A13	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19428-72060	RADIATOR ASSY.	1	
15442-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19428-72330	SHROUD, FAN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15409-54610	LABEL(RADIATOR)	1	
19684-72850	RADIATOR HOSE (LOWER)	1	
19428-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	PIN,SNAP	2	
19682-72130	SUPPORT1, RADIATOR	1	
19427-72140	SUPPORT2, RADIATOR	1	
19428-72160	STAY, RADIATOR	2	
01123-50822	BOLT	4	
19416-72250	NET, RADIATOR	1	
04015-50060	WASHER, PLAIN	6	
01023-50612	BOLT	6	
19428-74120	COVER, FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

A14	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16631-72060	RADIATOR ASSY.	1	^
16631-72111	RADIATOR [NOT AVAIL]	1	^

...continued

A14	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15701-72030	ASSY CAP	1	
16632-72330	SHROUD, FAN	1	^
15571-72710	PIPE, WATER OVERFLOW	1	^
01023-50612	BOLT	8	^
04012-50060	WASHER, PLAIN	8	^
15453-88610	LABEL,RADIATOR	1	
35170-94880	LABEL,CAUTION	1	
19426-87880	LABEL	1	
15701-72850	RADIATOR HOSE (LOWER)	1	
15701-72870	BAND, PIPE WATER	2	
15451-72940	PIPE,WATER 2	1	
15701-72960	RADIATOR HOSE (UPPER)	2	
15111-72190	CUSHION	2	
15111-72180	CUSHION	2	
16631-72130	SUPPORT,RADIATOR	2	
15111-72202	WASHER	4	
16631-72381	BOLT	2	
05515-51000	PIN,SNAP	2	
01133-51028	BOLT	4	
19271-16150	CAP	1	
19271-16160	BAND	1	
16631-74120	COVER, FAN	1	
01020-50616	BOLT	5	
02056-50060	NUT	5	
04512-50060	WASHER,SPRING	5	
04014-50060	WASHER, PLAIN	5	

A15	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16632-72060	RADIATOR ASSY.	1	
16632-72111	RADIATOR [NOT AVAIL]	1	^
15701-72030	ASSY CAP	1	^
16632-72330	SHROUD, FAN	1	^
15571-72710	PIPE, WATER OVERFLOW	1	^
01023-50612	BOLT	8	^
04012-50060	WASHER, PLAIN	8	^
15453-88610	LABEL,RADIATOR	1	
35170-94880	LABEL,CAUTION	1	
19426-87880	LABEL	1	

more...

more...

Option Kits

...continued

A15	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15701-72850	RADIATOR HOSE (LOWER)	1	
15701-72870	BAND, PIPE WATER	2	
15451-72940	PIPE,WATER 2	1	
15701-72960	RADIATOR HOSE (UPPER)	2	
15111-72190	CUSHION	2	
15111-72180	CUSHION	2	
16631-72130	SUPPORT,RADIATOR	2	
15111-72202	WASHER	4	
16631-72381	BOLT	2	
05515-51000	PIN,SNAP	2	
01133-51028	BOLT	4	
19271-16150	CAP	1	
19271-16160	BAND	1	
16631-74120	COVER, FAN	1	
01020-50616	BOLT	1	
02056-50060	NUT	5	
04512-50060	WASHER,SPRING	5	
04014-50060	WASHER, PLAIN	5	
01020-50616	BOLT	4	

A16	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16662-72060	RADIATOR ASSY.	1	
17391-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
16662-72330	SHROUD, FAN	1	^
15601-72710	PIPE, WATER OVERFLOW	1	^
19077-87240	LABEL, CAUTION	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,ANTIFREEZE	1	
15611-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15465-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	PIN,SNAP	2	
15575-73100	DRAIN COCK	1	

...continued

A16	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16662-72130	SUPPORT1,RADIATOR	1	
16662-72140	SUPPORT2,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	BOLT	4	
02156-50080	NUT	4	
04512-50080	WASHER,SPRING	4	
19412-72250	RADIATOR NET	1	
04014-50060	WASHER,PLAIN	6	
01023-50610	BOLT	6	
19412-74122	FAN COVER	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	
19412-72160	STAY(A),RADIATOR	1	
19412-72170	STAY(B),RADIATOR	1	
01023-50614	BOLT	1	
04013-50060	WASHER, PLAIN	2	
68131-43380	RUBBER, CUSHION	1	
02156-50080	NUT	2	
04512-50080	WASHER,SPRING	2	
17298-97260	COLLAR	1	
01023-50648	BOLT	1	
01023-50622	BOLT	2	

A17	RADIATOR NLA SEE <KO5RAD2		
P/N	DESCRIPTION	QTY	NOTE
16625-72060	RADIATOR ASSY.	1	
16626-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16625-72330	SHROUD, FAN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL,ANTIFREEZE	1	
16626-72850	RADIATOR HOSE (LOWER)	1	
16626-72940	RADIATOR HOSE (UPPER)	1	
36200-82720	BAND	4	

more...

more...

Option Kits

[...continued](#)

A17	RADIATOR NLA SEE <KO5RAD2		
P/N	DESCRIPTION	QTY	NOTE
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16616-72130	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
16616-72160	STAY1,RADIATOR	2	
16616-72150	STAY3,RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
19428-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

A18	RADIATOR NLA SEE <KO5RAD4		
P/N	DESCRIPTION	QTY	NOTE
16626-72060	RADIATOR ASSY.	1	
16626-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16626-72330	SHROUD, FAN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL,ANTIFREEZE	1	
16266-72850	RADIATOR HOSE (LOWER)	1	
16266-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	

[...continued](#)

A18	RADIATOR NLA SEE <KO5RAD4		
P/N	DESCRIPTION	QTY	NOTE
16616-73130	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
16616-72160	STAY1,RADIATOR	2	
16616-72150	STAY3,RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
1G698-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

A19	RADIATOR NLA (SEE <KO5GRTRAD2)		
P/N	DESCRIPTION	QTY	NOTE
16613-72060	RADIATOR ASSY.	1	
16613-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16613-72330	SHROUD, FAN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL,ANTIFREEZE	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16266-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16683-72130	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
19428-72160	STAY1,RADIATOR	2	
16616-72150	STAY3,RADIATOR	1	
01123-50822	BOLT	2	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A19	RADIATOR NLA (SEE <K05GRTRAD2)		
P/N	DESCRIPTION	QTY	NOTE
01123-50830	BOLT	2	
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
16613-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

A20	RADIATOR NLA (SEE <K05BGTRAD4)		
P/N	DESCRIPTION	QTY	NOTE
16616-72060	RADIATOR ASSY.	1	
16286-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16616-72330	SHROUD, FAN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL,ANTIFREEZE	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16286-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16683-72130	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
16616-72160	STAY1,RADIATOR	2	
16616-72150	STAY3,RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19412-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
16616-74120	COVER,FAN	1	

[...continued](#)

A20	RADIATOR NLA (SEE <K05BGTRAD4)		
P/N	DESCRIPTION	QTY	NOTE
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

A21X	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16292-72060	RADIATOR ASSY.	1	
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16292-72850	RADIATOR HOSE (LOWER)	1	
16292-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	

A22	RADIATOR NLA (SEE <K05BGTRAD4)		
P/N	DESCRIPTION	QTY	NOTE
1E035-76060	RADIATOR ASSY.	1	
19426-87880	LABEL,ANTIFREEZE	1	
16292-72850	RADIATOR HOSE (LOWER)	1	
16292-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
1E035-72130	SUPPORT1,RADIATOR	1	
1E035-72140	SUPPORT2,RADIATOR	1	
1E035-72160	STAY1,RADIATOR	2	
1E035-72150	STAY3,RADIATOR	1	
01123-50825	BOLT	2	
01123-50830	BOLT	2	
19412-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	

[more...](#)
[more...](#)

Option Kits

...continued

A22	RADIATOR NLA (SEE <K05BGTRAD4)		
P/N	DESCRIPTION	QTY	NOTE
1E035-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

A23	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G951-72060	ASSY RADIATOR	1	
1G951-72111	RADIATOR [NOT AVAIL]	1	^
6C040-58660	ASSY CAP	1	^
1G951-72330	SHROUD, FAN	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
1G951-72850	RADIATOR HOSE (LOWER)	1	
1G951-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP, HOSE	4	
1G952-72180	CUSHION, RADIATOR	2	
1G951-72130	SUPPORT, RADIATOR	1	
1G951-72140	SUPPORT, RADIATOR	1	
1G951-72150	STAY	1	
1G932-72160	STAY, RADIATOR	2	
01123-50818	BOLT, SEMS	4	
1G932-72190	CUSHION, RUBBER	2	
02114-50080	HEX. NUT	4	
04512-50080	WASHER, SPRING LOCK	4	
1G952-72170	STAY, RADIATOR	1	
01123-50830	BOLT, SEMS	2	
1G930-72190	CUSHION, RUBBER	1	
02014-50060	HEX. NUT	2	
04512-50060	WASHER, SPRING LOCK	2	
1G959-72130	SUPPORT, RADIATOR	1	
12556-67860	COLLAR	1	
01025-50625	BOLT	1	
1G959-72140	SUPPORT, RADIATOR	1	
12556-67860	COLLAR	1	
01025-50625	BOLT	1	
1G951-72250	NET, RADIATOR	1	
01025-50614	BOLT	4	

...continued

A23	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G659-74120	COVER, FAN	1	
01053-50614	HEX. BOLT	4	
04512-50060	WASHER, SPRING LOCK	4	
04014-50060	WASHER, PLAIN	4	
1G951-30820	STOPPER	2	
12556-67860	COLLAR	2	
01025-50625	BOLT	2	

A24	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G952-72060	ASSY RADIATOR	1	
1E013-72110	RADIATOR [NOT AVAIL]	1	^
6C040-58660	ASSY CAP	1	^
1G952-72330	SHROUD, FAN	1	^
RC411-42390	CAP	1	^
RC411-42510	CLAMP	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
1G952-72850	RADIATOR HOSE (LOWER)	1	
1G952-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP, HOSE	2	
09318-89039	CLAMP, HOSE	2	
1G952-72180	CUSHION, RADIATOR	2	
1G952-72130	SUPPORT, RADIATOR	1	
1G952-72140	SUPPORT, RADIATOR	1	
1G952-72150	STAY	1	
1G932-72160	STAY, RADIATOR	2	
01123-50818	BOLT, SEMS	4	
1G932-72190	CUSHION, RUBBER	2	
02114-50080	HEX. NUT	4	
04512-50080	WASHER, SPRING LOCK	4	
1G952-72170	STAY, RADIATOR	1	
01123-50830	BOLT, SEMS	2	
1G930-72190	CUSHION, RUBBER	1	
02014-50060	HEX. NUT	2	
04512-50060	WASHER, SPRING LOCK	2	
1G960-72130	SUPPORT, RADIATOR	1	
12556-67860	COLLAR	1	
01025-50625	BOLT	1	

more...

more...

Option Kits

[...continued](#)

A24	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G960-72140	SUPPORT, RADIATOR	1	
12556-67860	COLLAR	1	
01025-50625	BOLT	1	
1G952-72250	NET, RADIATOR	1	
01025-50614	BOLT	4	
1G639-74120	COVER, FAN	1	
01053-50614	HEX. BOLT	4	
04512-50060	WASHER, SPRING LOCK	4	
04014-50060	WASHER, PLAIN	4	
1G952-30820	STOPPER	2	
12556-67860	COLLAR	2	
01025-50625	BOLT	2	

A25	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G952-72060	ASSY RADIATOR	1	
1E013-72111	RADIATOR [NOT AVAIL]	1	^
6C040-58660	ASSY CAP	1	^
1G952-72330	SHROUD, FAN	1	^
RC411-42390	CAP	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
1G952-72850	RADIATOR HOSE (LOWER)	1	
1G952-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP, HOSE	2	
09318-89039	CLAMP, HOSE	2	
1G952-72180	CUSHION, RADIATOR	2	
1G952-72190	CUSHION, RADIATOR	2	
1G639-72140	SUPPORT 1, RADIATOR	1	
1G952-72150	SUPPORT 2, RADIATOR	1	
1G932-72160	STAY 1, RADIATOR	1	
1G639-72170	STAY 2, RADIATOR	1	
01023-50630	BOLT	2	
02014-50060	NUT	2	
01025-50614	BOLT	4	
1G952-72250	NET, RADIATOR	1	
01025-50625	BOLT	2	
01153-50822	BOLT	4	
02156-50080	NUT	4	

[...continued](#)

A25	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
04512-50080	WASHER, SPRING LOCK	2	
1G960-72130	SUPPORT, RADIATOR	1	
1G960-72140	SUPPORT, RADIATOR	1	
12556-67860	COLLAR	2	
12556-67860	COLLAR	1	
1G952-30820	STOPPER	2	
04014-50060	WASHER, PLAIN	4	
01153-50822	BOLT	4	
1G639-74120	COVER, FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING LOCK	4	
04014-50060	WASHER, PLAIN	8	

A26	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G951-72060	ASSY RADIATOR	1	^
1G951-72111	RADIATOR [NOT AVAIL]	1	^
6C040-58660	ASSY CAP	1	^
1G951-72330	SHROUD, FAN	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
1G951-72850	RADIATOR HOSE (LOWER)	1	
1G951-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP, HOSE	4	
1G952-72180	CUSHION, RADIATOR	2	
1G637-72130	SUPPORT, RADIATOR	1	
1G637-72140	SUPPORT, RADIATOR	1	
1G951-72150	STAY	1	
1G932-72160	STAY, RADIATOR	2	
01123-50818	BOLT, SEMS	4	
1G932-72190	CUSHION, RUBBER	2	
02114-50080	HEX. NUT	4	
04512-50080	WASHER, SPRING LOCK	4	
1G639-72170	STAY, RADIATOR	1	
01123-50830	BOLT, SEMS	2	
1G930-72190	CUCHION, RUBBER	1	
02014-50060	HEX. NUT	2	
04512-50060	WASHER, SPRING LOCK	2	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A26	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G959-72130	SUPPORT, RADIATOR	1	
12556-67860	COLLAR	1	
01025-50625	BOLT	1	
1G959-72140	SUPPORT, RADIATOR	1	
12556-67860	COLLAR	1	
01025-50625	BOLT	1	
1G951-72250	NET, RADIATOR	1	
01025-50614	BOLT	4	
1G659-74120	COVER, FAN	1	
01053-50614	HEX. BOLT	4	
04512-50060	WASHER, SPRING LOCK	4	
04014-50060	WASHER, PLAIN	4	
1G951-30820	STOPPER	2	
12556-67860	COLLAR	2	
01025-50625	BOLT	2	

A27	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G957-72060	ASSY RADIATOR	1	
1G957-72111	RADIATOR [NOT AVAIL]	1	^
1G957-72330	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G957-72330	SHROUD, FAN	1	^
15861-72710	PIPE, WATER OVERFLOW	1	^
34070-16070	PLUG, DRAIN	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
1G957-72850	RADIATOR HOSE (LOWER)	1	
1G957-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP, HOSE	1	
15841-72960	CLAMP, HOSE	3	
15111-72180	CUSHION, RADIATOR	2	
15111-72190	CUSHION, RADIATOR	2	
16687-72130	SUPPORT 1, RADIATOR	1	
16687-72140	SUPPORT 2, RADIATOR	1	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP, PIN	2	

[...continued](#)

A27	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16687-82130	SUPPORT 1, RADIATOR	1	
16687-72140	SUPPORT 2, RADIATOR	1	
19416-72150	STAY	1	
01153-50822	BOLT	4	
02156-50080	NUT	4	
04512-50080	WASHER, SPRING LOCK	4	
19653-72250	NET, RADIATOR	1	
04014-50060	WASHER, PLAIN	4	
01153-50822	BOLT	4	
1G637-74120	COVER, FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING LOCK	4	
04014-50060	WASHER, PLAIN	8	

A28	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G348-72060	RADIATOR ASSY.	1	
1G345-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
1G438-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL	1	
1K522-72850	RADIATOR HOSE (LOWER)	1	
1K522-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	4	
1G932-72180	CUSHION	2	
1G960-72130	SUPPORT 1, RADIATOR	1	
1G960-72150	STAY	1	
1G932-72160	STAY 1, RADIATOR	2	
01123-50818	BOLT	4	
1G932-72190	CUSHION	2	
02114-50080	NUT	4	
04512-50080	SPRING WASHER	4	
1G932-72170	STAY 2, RADIATOR	1	
01123-50840	BOLT	2	
1G930-72190	CUSHION	1	

[more...](#)

Option Kits

...continued

A31	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15956-72060	RADIATOR ASSY.	1	
15956-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
15231-73110	COCK, DRAIN	1	^
15409-94610	LABEL,RADIATOR	1	
15331-72850	RADIATOR HOSE (LOWER)	1	
15956-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
66711-51341	BOLT	2	
05515-51000	SNAP PIN	2	
04013-50100	PLAIN WASHER	2	

A32	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15531-72060	RADIATOR ASSY.	1	
15531-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
15531-74470	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15409-94610	LABEL,RADIATOR	1	
15331-72850	RADIATOR HOSE (LOWER)	1	
15531-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
66711-51341	BOLT	2	
05515-51000	SNAP PIN	2	
04013-50100	PLAIN WASHER	2	
19264-36180	CAP	1	
19271-16160	BAND	1	

A33	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15442-72060	RADIATOR ASSY.	1	
15442-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
15442-72330	SHROUD, FAN	1	^

A33	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15231-73110	COCK, DRAIN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
15409-94610	LABEL,RADIATOR	1	
15442-72850	RADIATOR HOSE (LOWER)	1	
15442-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
66711-51341	BOLT	2	
05515-51000	SNAP PIN	2	
15111-72202	WASHER	2	
04013-50100	PLAIN WASHER	2	

A34	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G957-72060	ASSY RADIATOR	1	^
1G957-72111	RADIATOR [NOT AVAIL]	1	^
1G957-72330	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G957-72330	SHROUD, FAN	1	^
15861-72710	PIPE, WATER OVERFLOW	1	^
34070-16070	PLUG, DRAIN	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
1G957-72850	RADIATOR HOSE (LOWER)	1	
1G957-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP,HOSE	1	
15841-72960	BAND,PIPE	3	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
16687-72130	SUPPORT, RADIATOR	1	
16687-72140	SUPPORT, RADIATOR	1	
19416-72150	STAY	1	
01153-50822	HEX, BOLT	4	
02156-50080	HEX, BOLT	4	
04512-50080	WASHER,SPRING LOCK	4	

more...

[more...](#)

Option Kits

[...continued](#)

A34	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19653-72250	NET,RADIATOR	1	
04014-50060	WASHER,PLAIN	4	
01023-50610	BOLT,SEMS	4	
1G637-74120	COVER,FAN	1	
01053-50614	HEX, BOLT	4	
02056-50060	HEX,NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	

A35	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15596-72060	RADIATOR ASSY.	1	
15521-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
15521-72330	SHROUD, FAN	1	^
15596-72710	PIPE, WATER	1	^
15471-72730	CLAMP, PIPE	1	^
16478-88230	LABEL(RADIATOR)	1	
15521-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15521-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	PIN,SNAP	2	
15575-73100	DRAIN COCK	1	
15465-73340	PIPE, WATER RETURN 3	1	
15521-73140	CLAMP	1	
15109-73364	BAND, PIPE	4	
15521-73132	PIPE, DRAIN	1	
19271-16150	CAP	1	
19271-16160	BAND	1	
15529-73160	CONNECTOR	1	
15321-73340	PIPE, WATER RETURN 1	1	

A36	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19227-72060	RADIATOR ASSY.	1	

[...continued](#)

A36	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19227-72111	RADIATOR [NOT AVAIL]		^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
15477-72330	SHROUD, FAN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL,RADIATOR	1	
15471-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15471-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	PIN,SNAP	2	
15575-73100	DRAIN COCK	1	

A37	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15549-72060	RADIATOR ASSY.	1	
15549-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
15532-74470	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15409-54610	LABEL(RADIATOR)	1	
19426-87880	LABEL(CAUTION)	1	
15442-72850	RADIATOR HOSE (LOWER)	1	
15442-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
15111-72202	WASHER	4	
66711-51341	BOLT	2	
05515-51000	PIN,SNAP	2	
04013-50100	PLAIN WASHER	2	

A38	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15443-72060	RADIATOR ASSY.	1	
15443-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A38	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19077-87240	LABEL, CAUTION	1	^
15443-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
15409-54610	LABEL(RADIATOR)	1	
19426-87880	LABEL(CAUTION)	1	
15442-72850	RADIATOR HOSE (LOWER)	1	
15442-72940	RADIATOR HOSE (UPPER)	1	
15261-72780	BAND	4	
15111-72180	CUSHION	2	
15111-72202	WASHER	4	
66711-51341	BOLT	2	
05515-51000	PIN,SNAP	2	
04013-50100	PLAIN WASHER	2	

A39	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15261-72060	RADIATOR ASSY.	1	
15409-54610	LABEL,RADIATOR	1	
15621-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15621-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	PIN,SNAP	2	
15529-73160	JOINT, DRAIN COCK	1	
14412-73114	DRAIN COCK	1	
15621-73350	WATER RETURN PIPE 4	1	
15001-72870	BAND	2	

A40	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G958-72060	ASSY RADIATOR	1	
1G958-72112	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G958-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^

[...continued](#)

A40	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15401-72710	PIPE, WATER OVERFLOW	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,INSTRUCTION	1	

A40	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
EG601-72850	RADIATOR HOSE (LOWER)	1	
12594-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP,HOSE	2	
09318-89036	CLAMP,HOSE	2	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
12586-72130	SUPPORT,RADIATOR	1	
12586-72140	SUPPORT,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	HEX,BOLT	4	
02156-50080	HEX,NUT	4	
04512-50080	WASHER,SPRING LOCK	4	
19426-72250	NET,RADIATOR	1	
04014-50060	WASHER,PLAIN	4	
01023-50610	BOLT,SEMS	4	
1G639-74120	COVER,FAN	1	
01053-50614	HEX,BOLT	4	
02056-50060	HEX,NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	

A41	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G996-72060	ASSY RADIATOR	1	
1G996-72112	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP [NA]	1	^
19077-87240	LABEL, CAUTION	1	^
1G996-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A41	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
34070-16090	O-RING	1	^
19426-87880	LABEL,INSTRUCTION	1	
1G996-72850	RADIATOR HOSE (LOWER)	1	
1K522-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	SNAP PIN	2	
16616-72130	SUPPORT,RADIATOR	1	
16616-72140	SUPPORT,RADIATOR	1	
16616-72160	STAY,RADIATOR	2	
16616-72150	STAY,RADIATOR	1	
01123-50822	BOLT,SEMS	2	
01123-50830	BOLT,SEMS	2	
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER, PLAIN	6	
01023-50612	BOLT,SEMS	6	
1G690-74120	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	

A42	RADIATOR NLA (SEE <KSMRAD20)		
P/N	DESCRIPTION	QTY	NOTE
19653-72060	ASSY RADIATOR	1	
15861-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19653-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15861-72710	PIPE, WATER OVERFLOW	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL,INSTRUCTION	1	
16478-88230	LABEL,RADIATOR	1	
15861-72850	RADIATOR HOSE (LOWER)	1	
19462-72940	RADIATOR HOSE (UPPER)	1	

[...continued](#)

A42	RADIATOR NLA (SEE <KSMRAD20)		
P/N	DESCRIPTION	QTY	NOTE
15841-72980	CLAMP	3	
09318-89030	BAND	1	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	SNAP PIN	2	
16687-72130	SUPPORT 1,RADIATOR	1	
16687-72140	SUPPORT 2,RADIATOR	1	
19416-72150	STAY,RADIATOR	2	
01153-05822	BOLT	4	
15108-72383	BOLT,SEMS	2	
01023-50610	BOLT,SEMS	4	
19653-72250	NET,RADIATOR	1	
04014-50060	WASHER, PLAIN	8	
01023-50612	BOLT,SEMS	6	
19653-74120	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	

A43	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16853-72060	RADIATOR ASSY.	1	
16853-72111	RADIATOR [NOT AVAIL]	1	
16861-72020	ASSY CAP	1	
16853-72330	SHROUD, FAN	1	
16851-73110	COCK, DRAIN	1	
16853-72710	PIPE, WATER OVERFLOW	1	
16853-72060	RADIATOR ASSY.	1	^
16851-96690	GASKET	1	^
16851-72470	CLAMP, PIPE	1	^
02054-50050	HEX NUT	1	^
16853-72850	RADIATOR HOSE (LOWER)	1	
16853-72940	RADIATOR HOSE (UPPER)	1	
09318-89036	CLAMP	2	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A43	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15108-72383	BOLT	2	
05515-51000	SNAP, PIN	2	
09318-89030	CLAMP	2	

A44	RADIATOR NLA (SEE <KSMRAD2)		
P/N	DESCRIPTION	QTY	NOTE
16676-72060	ASSY RADIATOR	1	
15549-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16676-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
19426-87880	LABEL,INSTRUCTION	1	
16478-88230	LABEL,RADIATOR	1	
12594-72850	RADIATOR HOSE (LOWER)	1	
12594-72940	RADIATOR HOSE (UPPER)	1	
09318-89036	CLAMP	2	
09318-89030	CLAMP	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	SNAP PIN	2	
15108-72383	BOLT	2	
01023-50610	BOLT	4	
12586-72130	SUPPORT 1,RADIATOR	1	
12586-72140	SUPPORT 2,RADIATOR	1	
19416-72150	STAY,RADIATOR	2	
01153-05822	BOLT	4	
01053-50614	BOLT,SEMS	4	
19426-72250	NET,RADIATOR	1	
04014-50060	WASHER, PLAIN	8	
02156-50080	BOLT,SEMS	6	
19427-74124	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	

A46	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G994-72060	ASSY RADIATOR	1	
1G996-72112	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G994-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^
34070-16090	O-RING	1	^
19426-87880	LABEL,INSTRUCTION	1	
1G996-72850	RADIATOR HOSE (LOWER)	1	
1K522-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	SNAP PIN	2	
16616-72130	SUPPORT,RADIATOR	1	
16616-72140	SUPPORT,RADIATOR	1	
16616-72160	STAY,RADIATOR	2	
16616-72150	STAY,RADIATOR	1	
01123-50822	BOLT,SEMS	2	
01123-50830	BOLT,SEMS	2	
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER, PLAIN	6	
01023-50612	BOLT,SEMS	6	
1G698-74120	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	

A47	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G992-72060	ASSY RADIATOR	1	
1G992-72112	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G992-72330	SHROUD, FAN	1	^

[more...](#)

Option Kits

[...continued](#)

A47	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
34070-16070	PLUG, DRAIN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
34070-16090	O-RING	1	
19426-87880	LABEL, INSTRUCTION	1	
16292-72850	RADIATOR HOSE (LOWER)	1	
16292-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP, HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	SNAP PIN	2	
1E035-72130	SUPPORT, RADIATOR	1	
1E035-72140	SUPPORT, RADIATOR	1	
1E035-72160	STAY, RADIATOR	2	
1E035-72150	STAY, RADIATOR	1	
01123-50825	BOLT, SEMS	2	
01123-50830	BOLT, SEMS	2	
19412-72250	NET, RADIATOR	1	
04015-50060	WASHER, PLAIN	6	
01023-50612	BOLT, SEMS	6	
1G699-74120	COVER, FAN	1	
01053-50614	HEX. BOLT	4	
02056-50060	HEX. NUT	4	
04512-50060	WASHER, SPRING LOCK	4	
04014-50060	WASHER, PLAIN	8	

A48	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G981-72060	ASSY RADIATOR	1	
1G981-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G981-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
15596-72710	PIPE, WATER	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	

[...continued](#)

A48	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15521-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15521-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	SNAP PIN	2	
19416-72132	SUPPORT(1, RADIATOR)	1	
19416-72142	SUPPORT(2, RADIATOR)	1	
19416-72150	STAY	1	
01153-50822	HEX. BOLT	4	
02156-50080	HEX. NUT	4	
04512-50080	WASHER, SPRING LOCK	4	
19416-72250	NET, RADIATOR	1	
01023-50612	BOLT, SEMS	6	
04015-50060	WASHER, PLAIN	6	
1G953-74120	COVER, FAN	1	
01053-50614	HEX. BOLT	4	
02056-50060	HEX. NUT	4	
04512-50060	WASHER, SPRING LOCK	4	
04014-50060	WASHER, PLAIN	8	

A49	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G972-72060	ASSY RADIATOR	1	
1G972-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G972-72330	SHROUD, FAN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
15471-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15471-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A49	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15111-72202	WASHER	4	
05515-51000	SNAP PIN	2	
15575-73100	COCK,DRAIN	1	
16665-72130	SUPPORT,RADIATOR	1	
16665-72140	SUPPORT,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	HEX.BOLT	4	
02156-50080	HEX.NUT	4	
04512-50080	WASHER,SPRING LOCK	4	
19412-72250	NET,RADIATOR	1	
04014-50060	WASHER,PLAIN	6	
01023-50610	BOLT,SEMS	6	
1G608-74120	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	
19412-72160	STAY,RADIATOR A	1	
19412-72170	STAY,RADIATOR B	1	
01023-50622	BOLT,SEMS	2	
01023-50614	BOLT,SEMS	1	
04013-50060	WASHER, PLAIN	2	
68131-43380	CUSHION,RUBBER	1	
02156-50080	HEX.NUT	2	
04512-50080	WASHER,SPRING LOCK	2	
17298-97260	COLLAR	1	
01023-50648	BOLT,SEMS	1	

A50	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G975-72060	ASSY RADIATOR	1	
1G975-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G972-72330	SHROUD, FAN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,INSTRUCTION	1	
15471-72850	RADIATOR HOSE (LOWER)	1	

[...continued](#)

A50	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15108-72870	BAND	4	
15471-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	SNAP PIN	2	
15575-73100	COCK,DRAIN	1	
16665-72130	SUPPORT,RADIATOR	1	
16665-72140	SUPPORT,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	HEX.BOLT	4	
02156-50080	HEX.NUT	4	
04512-50080	WASHER,SPRING LOCK	4	
19412-72250	NET,RADIATOR	1	
04014-50060	WASHER,PLAIN	6	
01023-50610	BOLT,SEMS	6	
1G608-74120	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	
19412-72160	STAY,RADIATOR A	1	
19412-72170	STAY,RADIATOR B	1	
01023-50622	BOLT,SEMS	2	
01023-50612	BOLT,SEMS	1	
68131-43380	CUSHION,RUBBER	1	
02156-50080	HEX.NUT	2	
04512-50080	WASHER,SPRING LOCK	2	
17298-97260	COLLAR	1	
01023-50648	BOLT,SEMS	1	

A51	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16266-72060	RADIATOR ASSY.	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16266-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	4	
15111-72180	CUSHION	2	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A51	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15111-72202	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP, PIN	2	
16285-72860	PIPE 2, WATER	1	

A52	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16256-72060	RADIATOR ASSY.	1	
16286-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16256-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15261-72710	PIPE, WATER OVERFLOW	1	^
15231-96690	GASKET	1	^
16286-72850	RADIATOR HOSE (LOWER)	1	
16286-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	4	
15111-72180	CUSHION	2	
15111-72202	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP, PIN	2	
16285-72860	PIPE 2, WATER	1	

A53	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16286-72060	RADIATOR ASSY.	1	
16286-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
15286-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
15231-96690	GASKET	1	^
16286-72850	RADIATOR HOSE (LOWER)	1	
16286-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	4	
15111-72180	CUSHION	2	

[...continued](#)

A53	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP, PIN	2	
16285-72860	PIPE 2, WATER	1	

A54	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16296-72060	RADIATOR ASSY.	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16296-72940	RADIATOR HOSE (UPPER)	1	
36200-82720	CLAMP	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP, PIN	2	

A55	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16613-72060	RADIATOR ASSY.	1	
16613-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16613-72330	SHROUD, FAN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL,ANTIFREEZE	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16266-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16616-72130	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
19428-72160	STAY1,RADIATOR	2	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A55	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16616-72150	STAY3,RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
16613-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

A56	RADIATOR NLA (see <K05GTRAD2)		
P/N	DESCRIPTION	QTY	NOTE
16615-72060	RADIATOR ASSY.	1	
19426-87880	LABEL,ANTIFREEZE	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16286-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16616-72130	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
16616-72160	STAY1,RADIATOR	2	
16616-72150	STAY3,RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19412-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
19428-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

A57	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16616-72060	RADIATOR ASSY.	1	
16286-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16616-72330	SHROUD, FAN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL,ANTIFREEZE	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16286-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16616-72130	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
16616-72150	SUPPORT3,RADIATOR	2	
16616-72160	STAY3,RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19412-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
16616-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

A58	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16617-72060	RADIATOR ASSY.	1	
19426-87880	LABEL,ANTIFREEZE	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16296-72940	RADIATOR HOSE (UPPER)	1	
36200-82720	CLAMP,HOSE	4	

[more...](#)

Option Kits

...continued

A58	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16617-72130	SUPPORT1,RADIATOR	1	
16617-72140	SUPPORT2,RADIATOR	1	
16617-72150	SUPPORT3,RADIATOR	1	
16616-72160	STAY1,RADIATOR	2	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19412-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
16616-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

A59	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16625-72060	RADIATOR ASSY.	1	
16626-72111	RADIATOR [NOT AVAIL]	1	^^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16625-72330	SHROUD, FAN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL,ANTIFREEZE	1	
16626-72850	RADIATOR HOSE (LOWER)	1	
16626-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	BAND	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	

A60	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16626-72060	RADIATOR ASSY.	1	
16626-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16626-72330	SHROUD, FAN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL, CAUTION	1	
16626-72850	RADIATOR HOSE (LOWER)	1	
16626-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	

A65	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G976-72060	ASSY RADIATOR	1	
1G976-72112	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G976-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^
34070-16090	O-RING	1	^
19426-87880	LABEL,INSTRUCTION	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16266-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	SNAP PIN	2	
16683-72130	SUPPORT,RADIATOR	1	
16616-72140	SUPPORT,RADIATOR	1	

[more...](#)

Option Kits

[...continued](#)

A65	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19428-72160	STAY RADIATOR	2	
16616-72150	STAY RADIATOR	1	
01123-50822	BOLT,SEMS	2	
01123-50830	BOLT,SEMS	2	
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT,SEMS	6	
EG552-74120	COVER,FAN	1	
01053-50614	HEX,BOLT	4	
02056-50060	HEX,NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	

A66	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1G985-72060	ASSY RADIATOR	1	
1G975-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G985-72110	SHROUD, FAN	1	^
15601-72710	PIPE, WATER OVERFLOW	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,INSTRUCTION	1	
15611-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15465-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	SNAP PIN	2	
15575-73100	COCK,DRAIN	1	
16662-72130	SUPPORT,RADIATOR	1	
16662-72140	SUPPORT,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	HEX.BOLT	4	
02156-50080	HEX.NUT	4	
04512-50080	WASHER,SPRING LOCK	4	
19412-72250	NET,RADIATOR	1	

[...continued](#)

A66	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
04014-50060	WASHER,PLAIN	6	
01023-50610	BOLT,SEMS	6	
1G608-74120	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	
19412-72160	STAY,RADIATOR A	1	
19412-72170	STAY,RADIATOR B	1	
01023-50622	BOLT,SEMS	2	
01023-50614	BOLT,SEMS	1	
04013-50060	WASHER, PLAIN	2	
68131-43380	CUSHION,RUBBER	1	
02156-50080	HEX.NUT	2	
04512-50080	WASHER,SPRING LOCK	2	
17298-97260	COLLAR	1	
01023-50648	BOLT,SEMS	1	

A69	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1K553-72060	ASSY RADIATOR	1	
1G364-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
1K583-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,INSTRUCTION	1	
1G932-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
1G364-72940	RADIATOR HOSE (UPPER)	1	
34070-16031	CUSHION, RUBBER	4	

A70	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1K583-72060	RADIATOR ASSY.	1	
1K583-72112	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
1K583-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A70	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
34070-16090	O-RING	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL	1	
1G932-72850	RADIATOR HOSE (LOWER)	1	
1G364-72940	RADIATOR HOSE (UPPER)	1	
15108-72870	CLAMP	4	
34070-16031	CUSHION	4	

A71	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
19077-72080	RADIATOR ASSY.	1	
15409-54610	LABEL,RADIATOR	1	
19426-87880	LABEL	1	
15575-73100	DRAIN COCK	1	
15611-72850	RADIATOR HOSE (LOWER)	1	
15465-72940	RADIATOR HOSE (UPPER)	1	
15108-72870	CLAMP	4	
15111-72180	CUSHION	2	
15111-72202	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP, PIN	2	

A72	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16484-72060	RADIATOR ASSY.	1	
16484-72111	RADIATOR [NOT AVAIL]	1	
15272-72020	ASSY CAP	1	
16484-72330	SHROUD, FAN	1	
19077-87240	LABEL, CAUTION	1	
15621-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL	1	
15575-73100	DRAIN COCK	1	
15611-72850	RADIATOR HOSE (LOWER)	1	
15465-72940	RADIATOR HOSE (UPPER)	1	
15108-72870	CLAMP	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	

[...continued](#)

A72	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
15108-72383	BOLT	2	
05515-51000	SNAP, PIN	2	
15529-73160	CONNECTOR	1	
15521-73132	PIPE, DRAIN	1	
15109-73364	BAND	2	
19271-16150	CAP	1	
19271-16160	BAND	1	

A73	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16665-72060	RADIATOR ASSY.	1	
19227-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19412-72330	SHROUD, FAN	1	^
19077-87240	LABEL, CAUTION	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,ANTIFREEZE	1	
15471-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
15471-72940	RADIATOR HOSE (UPPER)	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
05515-51000	PIN,SNAP	2	
15575-73100	DRAIN COCK	1	
16665-72130	SUPPORT1,RADIATOR	1	
16665-72140	SUPPORT2,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	BOLT	4	
02156-50080	NUT	4	
04512-50080	WASHER,SPRING	4	
19412-72250	RADIATOR NET	1	
04014-50060	WASHER,PLAIN	6	
01023-50610	BOLT	6	
19412-74122	FAN COVER	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A73	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	
19412-72160	STAY(A), RADIATOR	1	
19412-72170	STAY(B), RADIATOR	1	
01023-50622	BOLT	2	
01023-50612	BOLT	1	
68131-43380	RUBBER3	1	
02156-50080	NUT	2	
04512-50080	WASHER, SPRING	2	
17298-97260	COLLAR	1	
01023-50648	BOLT	1	

A74	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16444-72060	RADIATOR ASSY.	1	
16444-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
12601-72330	SHROUD, FAN	1	^
19077-87240	LABEL, CAUTION	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL	1	
15575-73100	DRAIN COCK	1	
15611-72850	RADIATOR HOSE (LOWER)	1	
15465-72940	RADIATOR HOSE (UPPER)	1	
15108-72870	CLAMP	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP, PIN	2	

A80	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1K553-72060	ASSY RADIATOR	1	
1G364-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
1K583-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
34070-16090	O-RING	1	

[...continued](#)

A80	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
1G932-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
1G364-72940	RADIATOR HOSE (UPPER)	1	
1G932-72180	RUBBER	4	
1G932-72130	SUPPORT, RADIATOR 1	1	
1G932-72140	SUPPORT, RADIATOR 2	1	
1G932-72150	STAY	1	
1G932-72160	STAY, RADIATOR 1	2	
01123-50818	BOLT	4	
1G932-72190	CUSHION, RUBBER	2	
02114-50080	HEX. NUT	4	
04512-50080	WASHER, SPRING LOCK	4	
1G932-72170	STAY, RADIATOR	1	
01123-50840	BOLT, SEMS	2	
1G930-72190	CUSHION, RUBBER	1	
02114-50060	HEX. NUT	2	
04512-50060	WASHER, SPRING LOCK	2	
1G930-72130	SUPPORT, Inlet side	1	
01025-50618	BOLT	1	
1G930-72140	SUPPORT, Outlet Side	1	
01025-50618	BOLT	1	
1G930-72180	STAY, RADIATOR	2	
01123-50822	BOLT	2	
1G932-72250	NET, RADIATOR	1	
01025-50614	BOLT	4	
1G932-74120	FAN COVER	1	
01025-50614	BOLT	4	
02056-50060	HEX. NUT	4	
04512-50060	WASHER, SPRING LOCK	4	
04014-50060	WASHER, PLAIN	8	

A81	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
1K583-72060	ASSY RADIATOR	1	
1K583-72112	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
1K583-72330	SHROUD, FAN	1	^

[more...](#)
[more...](#)

Option Kits

[...continued](#)

A81	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
34070-16070	PLUG, DRAIN	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,INSTRUCTION	1	
1G932-72850	RADIATOR HOSE (LOWER)	1	
15108-72870	BAND	4	
1G364-72940	RADIATOR HOSE (UPPER)	1	
1G932-72180	RUBBER	4	
1G932-72130	SUPPORT,RADIATOR	1	
1G932-72140	SUPPORT,RADIATOR	1	
1G932-72150	STAY	1	
1G932-72160	STAY,RADIATOR	2	
01123-50818	BOLT,SEMS	4	
1G932-72190	CUSHION,RUBBER	2	
02114-50080	HEX,NUT	4	
04512-50080	WASHER,SPRING LOCK	4	
1G932-72170	STAY,RADIATOR	1	
01123-50840	BOLT,SEMS	2	
1G930-72190	CUSHION,RUBBER	1	
02114-50060	HEX,NUT	2	
04512-50060	WASHER,SPRING LOCK	2	
1G930-72130	SUPPORT,(Inlet)	1	
01025-50618	BOLT	1	
1G930-72140	SUPPORT,(Outlet)	1	
01025-50618	BOLT	1	
1G933-72180	STAY,RADIATOR	2	
01123-50822	BOLT,SEMS	2	
1G932-72250	NET,RADIATOR	1	
01025-50614	BOLT	4	
1G932-74120	COVER,FAN	1	
01025-50614	BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	

1G660-72001 RADIATOR			
P/N	DESCRIPTION	QTY	NOTE
1G347-72060	RADIATOR ASSY.	1	
1G345-72110	RADIATOR [NOT AVAIL]	1	^

[more...](#)
[...continued](#)

1G660-72001 RADIATOR			
P/N	DESCRIPTION	QTY	NOTE
17580-16060	ASSY CAP	1	^
1G347-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
34070-16090	O RING	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL	1	
1K522-72850	RADIATOR HOSE (LOWER)	1	
1K522-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	4	
34070-16030	CUSHION	4	

1G665-72001 RADIATOR			
P/N	DESCRIPTION	QTY	NOTE
1G348-72060	RADIATOR ASSY.	1	
1G345-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
1G438-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL	1	
1K522-72850	RADIATOR HOSE (LOWER)	1	
1K522-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	4	
34070-16030	CUSHION	4	

1G666-72001 RADIATOR			
P/N	DESCRIPTION	QTY	NOTE
1K553-72060	ASSY RADIATOR	1	
1G364-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
1K583-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL	1	
1G669-72850	RADIATOR HOSE (LOWER)	1	
1G669-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	2	
15108-72870	CLAMP	2	
34070-16030	CUSHION	4	

Option Kits

1G961-72001 RADIATOR			
P/N	DESCRIPTION	QTY	NOTE
1G951-72060	ASSY RADIATOR	1	
1G951-72111	RADIATOR [NOT AVAIL]	1	^
6C040-58660	ASSY CAP	1	^
1G951-72330	SHROUD, FAN	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
1G951-72850	RADIATOR HOSE (LOWER)	1	
1G951-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP, HOSE	4	
6C040-58660	CUSHION	4	

1G665-72001 RADIATOR			
P/N	DESCRIPTION	QTY	NOTE
1G348-72060	RADIATOR ASSY.	1	
1G345-72111	RADIATOR [NOT AVAIL]	1	^
17580-16060	ASSY CAP	1	^
1G438-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
34070-16090	O-RING	1	^
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL	1	
1K522-72850	RADIATOR HOSE (LOWER)	1	
1K522-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP	4	
34070-16030	CUSHION	4	

1G962-72001 RADIATOR			
P/N	DESCRIPTION	QTY	NOTE
1G952-72060	ASSY RADIATOR	1	
1E013-72110	RADIATOR [NOT AVAIL]	1	^
6C040-58660	ASSY CAP	1	^
1G952-72330	SHROUD, FAN	1	^
RC411-42390	CAP	1	^
RC411-42510	CLAMP	1	^
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, INSTRUCTION	1	
1G952-72850	RADIATOR HOSE (LOWER)	1	
1G952-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP, HOSE	2	
09318-89039	CLAMP, HOSE	2	
6C040-58580	CUSHION	4	

NEW COPPER RAD KITS

<KSMRAD2 RADIATOR			
P/N	DECEIPTION	QTY	NOTE
<KSMRAD2	RADIATOR ASSY	1	
15272-72020	ASSY CAP	1	
15231-73110	COCK, DRAIN	1	

R8 <1G957-72101 MOUNT KIT			
P/N	DECEIPTION	QTY	NOTE
NA	SHROUD, FAN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
19426-87880	LABEL,INSTRUCTION	1	
16478-88230	LABEL,RADIATOR	1	
12594-72850	RADIATOR HOSE (LOWER)	1	
12594-72940	RADIATOR HOSE (UPPER)	1	
09318-89036	CLAMP	2	
09318-89030	CLAMP	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	SNAP PIN	2	
15108-72383	BOLT	2	
01023-50610	BOLT	4	
72000-00581	INTAKE SIDE SUPPORT	1	
72000-00582	EXHAUST SIDE SUPPORT	1	
19416-72150	STAY,RADIATOR	2	
01153-05822	BOLT	4	
01053-50614	BOLT,SEMS	4	
19426-72250	NET,RADIATOR	1	
04014-50060	WASHER, PLAIN	8	
02156-50080	BOLT,SEMS	6	
19427-74124	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	

<KSMRAD4 RADIATOR			
P/N	DESEIPTION	QTY	NOTE
<KSMRAD4	RADIATOR ASSY	1	
15272-72020	ASSY CAP	1	^
15231-73110	COCK, DRAIN	1	^

Option Kits

...continued

R2	1G958-72101 MOUNT KIT		
P/N	DESCRIPTION	QTY	NOTE
19077-87240	LABEL, CAUTION	1	^ z
16676-72330	SHROUD, FAN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
19426-87880	LABEL, INSTRUCTION	1	
16478-88230	LABEL, RADIATOR	1	
12594-72850	RADIATOR HOSE (LOWER)	1	
12594-72940	RADIATOR HOSE (UPPER)	1	
09318-89036	CLAMP	2	
09318-89030	CLAMP	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	SNAP PIN	2	
15108-72383	BOLT	2	
01023-50610	BOLT	4	
72000-00581	INTAKE SIDE MOUNT	1	
72000-00582	EXHAUST SIDE MOUNT	1	
19416-72150	STAY, RADIATOR	2	
01153-05822	BOLT	4	
01053-50614	BOLT, SEMS	4	
19426-72250	NET, RADIATOR	1	
04014-50060	WASHER, PLAIN	8	
02156-50080	BOLT, SEMS	6	
19427-74124	COVER, FAN	1	
01053-50614	HEX. BOLT	4	
02056-50060	HEX. NUT	4	
04512-50060	WASHER, SPRING LOCK	4	
04014-50060	WASHER, PLAIN	8	

<KO5RAD2	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
<KO5RAD2	RADIATOR	1	
15272-72020	ASSY CAP	1	^

R4	<1G996-72101 MOUNT KIT		
P/N	DESCRIPTION	QTY	NOTE
19077-87240	LABEL, CAUTION	1	^
16625-72330	SHROUD, FAN	1	^
68351-42380	PIPE, WATER OVERFLOW	1	^
15231-73110	COCK, DRAIN	1	^

R4	<1G996-72101 MOUNT KIT		
P/N	DESCRIPTION	QTY	NOTE
15231-96690	GASKET	1	^
19426-87880	LABEL, ANTIFREEZE	1	
16626-72850	RADIATOR HOSE (LOWER)	1	
16626-72940	RADIATOR HOSE (UPPER)	1	
36200-82720	BAND	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN, SNAP	2	
16616-72130	SUPPORT1, RADIATOR	1	
16616-72140	SUPPORT2, RADIATOR	1	
16616-72160	STAY1, RADIATOR	2	
16616-72150	STAY3, RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19416-72250	NET, RADIATOR	1	
04015-50060	WASHER, PLAIN	6	
01023-50612	BOLT	6	
19428-74120	COVER, FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

<KO5RAD4	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
<KO5RAD4	RADIATOR ASSY	1	
15272-72020	ASSY CAP	1	
15231-73110	COCK, DRAIN	1	

R5	<1G994-72101 MOUNT KIT FOR <KO5RAD4		
P/N	DESCRIPTION	QTY	NOTE
19077-87240	LABEL, CAUTION	1	
NA	SHROUD, FAN	1	
68351-42380	PIPE, WATER OVERFLOW	1	
15231-96690	GASKET	1	
19426-87880	LABEL, ANTIFREEZE	1	
16626-72850	RADIATOR HOSE (LOWER)	1	
16626-72940	RADIATOR HOSE (UPPER)	1	

more...

more...

Option Kits

[...continued](#)

R5	<1G994-72101 MOUNT KIT FOR <KO5RAD4		
P/N	DESCRIPTION	QTY	NOTE
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16616-72130	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
16616-72160	STAY1,RADIATOR	2	
16616-72150	STAY3,RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
1G698-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

<KO5BGTRAD2	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
<KO5BGTRAD2	RADIATOR ASSY	1	
15272-72020	ASSY CAP	1	

R6	<1G976-72101 MOUNT KIT FOR <KO5BGTRAD2		
P/N	DESCRIPTION	QTY	NOTE
16286-72850	RADIATOR HOSE (LOWER)	1	
16266-72940	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16683-72131	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
1E035-72160	STAY1,RADIATOR	2	

[...continued](#)

R6	<1G976-72101 MOUNT KIT FOR <KO5BGTRAD2		
P/N	DESCRIPTION	QTY	NOTE
16616-72150	STAY3,RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
EG552-74121	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

<KO5BGTRAD4	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
<KO5BGTRAD4	RADIATOR ASSY	1	
15272-72020	ASSY CAP	1	^
15231-73110	COCK, DRAIN	1	^

R7	<1G964-72101		
P/N	DESCRIPTION	QTY	NOTE
19077-87240	LABEL, CAUTION	1	
NA	SHROUD, FAN	1	^
15621-72710	PIPE, WATER OVERFLOW	1	^
15231-96690	GASKET	1	^
19426-87880	LABEL,ANTIFREEZE	1	
16286-72850	RADIATOR HOSE (LOWER)	1	
16292-72851	RADIATOR HOSE (UPPER)	1	
09318-89039	CLAMP,HOSE	4	
15108-72383	BOLT	2	
15111-72202	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-51000	PIN,SNAP	2	
16683-72130	SUPPORT1,RADIATOR	1	
16616-72140	SUPPORT2,RADIATOR	1	
1E035-72162	STAY1,RADIATOR	2	
16616-72150	STAY3,RADIATOR	1	
01123-50822	BOLT	2	
01123-50830	BOLT	2	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

R7	<1G964-72101		
P/N	DESCRIPTION	QTY	NOTE
19416-72250	NET,RADIATOR	1	
04015-50060	WASHER,PLAIN	6	
01023-50612	BOLT	6	
16616-74120	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	

<KO3RAD2	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
<KO3RAD2	RADIATOR ASSY	1	
15272-72020	ASSY CAP	1	^

<KO3MRAD3	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
<KO3MRAD3	RADIATOR ASSY	1	
15272-72020	ASSY CAP	1	

R3	<1G985-72101 RAD MOUNT FOR <KO3MRAD2
Kit is the same for 03 and 03M	

<KV33TRAD	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
72000-00514	RADIATOR ASSY	1	
72000-00515	SHROUD	1	
72000-00555	FAN GUARD	1	
72000-00516	BOLT	14	
72000-00517	SPRING WASHER	14	
72000-00518	FLAT WASHER	14	
72000-00519	RAD CAP	1	
72000-00522	OVERFLOW PIPE	1	
72000-00520	STAY TOP BRACE	1	

<KV33TRS	MOUNT KIT		
P/N	DESCRIPTION	QTY	NOTE
72000-00507	EXHAUST SIDE SUPPORT	1	
72000-00508	INLET SIDE SUPPORT	1	
72000-00509	STAY CROSS	1	
72000-00510	TOP RAD HOSE	1	
72000-00511	BOTTOM RAD HOSE	1	
01153-50800	BOLT	4	

[...continued](#)

<KV33TRS	MOUNT KIT		
P/N	DESCRIPTION	QTY	NOTE
04512-60080	SPRING WASHER	4	
02156-50080	NUT	5	
15108-72380	RAD MOUNTING BOLT	2	
15111-72200	WASHER	4	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
05515-61000	SNAP PIN	2	
15701-72960	HOSE CLAMP	4	
68131-43380	CUSHION	1	
04512-60080	SPRING WASHER	1	
01754-50812	FLANGE BOLT	2	
13824-67580	CLAMP CORD	2	

<KV38TRAD	RADIATOR		
P/N	DESCRIPTION	QTY	NOTE
72000-00514	RADIATOR	1	
72000-00515	SHROUD	1	
72000-00516	BOLT	1	
72000-00517	SPRING WASHER	14	
72000-00518	FLAT WASHER	14	
72000-00519	RAD CAP	1	
72000-00522	OVERFLOW PIPE	1	
72000-00551	ALTERNATOR GUARD	1	
72000-00556	FINGER GUARD	1	
04512-60080	LOCK WASHER	2	
01155-50840	BOLT	1	
02056-50080	NUT	1	

<KV38TRS	HIGH FAN MOUNT KIT		
P/N	DESCRIPTION	QTY	NOTE
72000-00559	TOP RAD SUPPORT	1	
72000-00560	EXHAUST SIDE SUPPORT	1	
72000-00561	INTAKE SIDE SUPPORT	1	
72000-00509	STAY CROSS	1	
15111-72200	WASHER	4	
15111-72190	CUSHION	2	
13824-67580	CLAMP CORD	2	
15111-72180	CUSHION	2	
15108-72380	BOLT RAD MOUNTING	1	
05515-61000	SNAP PIN	2	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

<KV38TRS	HIGH FAN MOUNT KIT		
P/N	DESCRIPTION	QTY	NOTE
68131-43380	CUSHION TOP SUPPORT	1	
72000-00558	TOP RAD HOSE	1	
72000-00557	LOWER RAD HOSE	1	
15701-72960	HOSE CLAMP	4	
04512-60080	SPRING WASHER	5	
02156-50080	NUT	5	
04015-60080	PLAIN WASHER	1	
01153-50822	BOLT	4	
01754-50812	BOLT	2	

B01	AIR		
P/N	DESCRIPTION	QTY	NOTE
15372-11016	ASSY AIR CLEANER	1	
19167-11080	ELEMENT, AIR CLEANER	1	^
15241-11160	COVER, AIR CLEANER	1	^
15241-11350	CAP, AIR CLEANER	1	^
15221-92620	BOLT, WING	1	^
19426-89703	CAUTION LABEL	1	
15371-11252	BAND, AIR CLEANER	1	
15371-11870	CUSHION	1	
01222-50830	BOLT	1	
02114-50080	NUT	1	
04512-50080	SPRING WASHER	1	
01123-50820	BOLT	2	
66711-54310	STAY, AIR CLEANER	1	
15262-11620	PIPE, INLET	1	
15221-11720	BAND	1	
15261-11720	BAND	1	
01120-50816	BOLT	2	

B02	AIR		
P/N	DESCRIPTION	QTY	NOTE
15372-11016	ASSY AIR CLEANER	1	
19167-11080	ELEMENT, AIR CLEANER	1	^
15241-11160	COVER, AIR CLEANER	1	^
15241-11350	CAP, AIR CLEANER	1	^
15221-92620	BOLT, WING	1	^
19426-89703	CAUTION LABEL	1	
15371-11252	BAND, AIR CLEANER	1	
15371-11870	CUSHION	1	

[...continued](#)

B02	AIR		
P/N	DESCRIPTION	QTY	NOTE
01222-50830	BOLT	1	
02114-50080	NUT	1	
04512-50080	SPRING WASHER	1	
01123-50820	BOLT	2	
66711-54310	STAY, AIR CLEANER	1	
15371-11620	PIPE, INLET	1	
15221-11720	PIPE, BAND	1	
01120-50816	BOLT	2	

B03	AIR		
P/N	DESCRIPTION	QTY	NOTE
19494-11010	ASSY AIR CLEANER	1	
15401-11080	ELEMENT, AIR CLEANER	1	
15401-11160	COVER, AIR CLEANER	1	^
19494-11350	CAP, AIR CLEANER	1	^
15401-92620	BOLT, WING	1	^
15126-11090	ASSY INDICATOR	1	^
15401-11070	ASSY BAND, AIR CLEANER	1	^
19426-89703	CAUTION LABEL	1	
15000-36930	BAND, AIR CLEANER	1	
15000-36920	CUSHION	1	
01153-50840	BOLT	1	
02114-50080	NUT	1	
04512-50080	SPRING WASHER	1	
01120-50816	BOLT	2	
1500-36940	STAY, AIR CLEANER	1	
19428-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	1	
15221-11720	PIPE, BAND	1	
19428-11940	COLLAR, AIR CLEANER	1	

B04	AIR		
P/N	DESCRIPTION	QTY	NOTE
19418-11010	ASSY AIR CLEANER	1	
15621-11180	ELEMENT, AIR INNER	1	
15621-11210	ELEMENT, AIR OUTER	1	^
15621-11410	COVER, BAFFLE	1	^
19418-11350	CAP, AIR CLEANER	1	^
15621-92640	BOLT, WING	1	^
19418-11090	ASSY INDICATOR	1	^

[more...](#)
[more...](#)

Option Kits

[...continued](#)

B04			
AIR			
P/N	DESCRIPTION	QTY	NOTE
19426-89703	CAUTION LABEL	1	
36330-19160	CUSHION	1	
01123-50828	BOLT	4	
02114-50080	NUT	2	
04512-50080	SPRING WASHER	2	
01123-50820	BOLT	3	
19418-11570	STAY, AIR CLEANER	1	
19418-11620	PIPE 1, INLET	1	
15261-11630	PIPE 2, INLET	1	
19418-11640	PIPE 3, INLET	1	
15401-11720	PIPE, BAND	1	
15571-11720	PIPE, BAND	1	
36330-19140	SUPPORT 1, AIR CLEANER	1	
36330-19151	SUPPORT 2, AIR CLEANER	1	

B05			
AIR			
P/N	DESCRIPTION	QTY	NOTE
19494-11010	ASSY AIR CLEANER	1	
15401-11080	ELEMENT, AIR CLEANER	1	^
15401-11160	COVER, AIR CLEANER	1	^
19494-11350	CAP, AIR CLEANER	1	^
15401-92620	BOLT WING	1	^
15126-11090	ASSY INDICATOR	1	^
15401-11070	ASSY BAND, AIR CLEANER	1	
19426-89703	CAUTION LABEL	1	
34260-13960	BAND, AIR CLEANER	1	
34260-13970	CUSHION, BAND	1	
01150-50838	BOLT	2	
04512-60140	SPRING WASHER	2	
01120-50816	BOLT	4	
19416-91011	BOLT	2	
19416-11570	STAY, AIR CLEANER	1	
19416-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	2	

B06			
AIR			
P/N	DESCRIPTION	QTY	NOTE
15606-11010	ASSY AIR CLEANER	1	
15606-11080	ELEMENT, AIR CLEANER	1	
15606-11160	COVER, AIR CLEANER	1	^

[...continued](#)

B06			
AIR			
P/N	DESCRIPTION	QTY	NOTE
68331-43640	CAP, AIR CLEANER	1	^
15606-92620	BOLT, WING	1	^
15126-11090	ASSY INDICATOR	1	^
15606-11070	ASSY BAND, AIR CLEANER	1	^
15401-94430	WASHER, SEAL	1	
19426-89703	CAUTION LABEL	1	
38430-13980	BAND, AIR CLEANER	2	
38430-13970	CUSHION	2	
01123-50820	BOLT	2	
04512-60140	SPRING WASHER	2	
19416-91011	BOLT	2	
19416-11570	STAY, AIR CLEANER	1	
19412-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	1	
15606-11720	PIPE, BAND	1	
38430-13940	SUPPORT, AIR CLEANER	1	

B07			
AIR			
P/N	DESCRIPTION	QTY	NOTE
15571-11010	ASSY AIR CLEANER	1	
15571-11220	ELEMENT, AIR CLEANER	1	^
15571-11160	COVER, AIR CLEANER	1	^
15621-92620	BOLT, WING	1	^
15621-11090	ASSY INDICATOR	1	^
19426-89703	CAUTION LABEL	1	^
36330-19160	CUSHION	1	
04512-50080	SPRING WASHER	2	
15841-11620	PIPE 1, INLET	1	
15571-11630	PIPE 2, INLET	1	
15571-11642	PIPE 3, INLET	1	
15701-11722	BAND	3	
15571-11720	BAND	1	
36330-19140	SUPPORT 1, AIR CLEANER	1	
36330-19151	SUPPORT 2, AIR CLEANER	1	
02114-50080	NUT	2	

B08			
AIR			
P/N	DESCRIPTION	QTY	NOTE
15571-11010	ASSY AIR CLEANER	1	
15571-11220	ELEMENT, AIR CLEANER	1	

[more...](#)
[more...](#)

Option Kits

[...continued](#)

B08	AIR		
P/N	DESCRIPTION	QTY	NOTE
15571-11160	COVER, AIR CLEANER	1	^
15621-92620	BOLT, WING	1	^
15621-11090	ASSY INDICATOR	1	^
19426-89703	CAUTION LABEL	1	^
36330-19160	CUSHION	1	^
04512-50080	SPRING WASHER	2	
15841-11620	PIPE 1, INLET	1	
15571-11630	PIPET 2, INLET	1	
15481-11640	PIPET 3, INLET	1	
15701-11722	BAND	3	
15571-11720	BAND	1	
36330-19140	SUPPORT 1, AIR CLEANER	1	
36330-19151	SUPPORT 2, AIR CLEANER	1	
02114-50080	NUT	2	

B10	AIR		
P/N	DESCRIPTION	QTY	NOTE
19494-11010	ASSY AIR CLEANER	1	
15401-11080	ELEMENT, AIR CLEANER	1	
15401-11160	COVER, AIR CLEANER	1	^
19494-11350	CAP, AIR CLEANER	1	^
15401-92620	BOLT, WING	1	^
15126-11090	ASSY INDICATOR	1	^
15401-11070	ASSY BAND, AIR CLEANER	1	
19426-89703	CAUTION LABEL	1	
34260-13960	BAND, AIR CLEARNER	1	
34260-13970	CUSHION	1	
01120-50816	BOLT	4	
01150-50838	BOLT	2	
19416-11573	STAY, AIR CLEANER	1	
17298-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	1	
15606-11720	PIPE, BAND	1	
19416-91011	BOLT	2	

B11	AIR		
P/N	DESCRIPTION	QTY	NOTE
15606-11010	ASSY AIR CLEANER	1	
15606-11080	ELEMENT, AIR CLEANER	1	
15606-11160	COVER, AIR CLEANER	1	^

[...continued](#)

B11	AIR		
P/N	DESCRIPTION	QTY	NOTE
68331-43640	CAP, AIR CLEANER	1	^
15606-92620	BOLT, WING	1	^
15126-11090	ASSY INDICATOR	1	^
15606-11070	ASSY BAND, AIR CLEANER	1	^
15401-94430	WASHER, SEAL	1	
19426-89703	CAUTION LABEL	1	
38430-13980	BAND, AIR CLEANER	2	
38430-13970	CUSHION	2	
01123-50820	BOLT	2	
04512-60140	SPRING WASHER	2	
19416-91011	BOLT	2	
19416-11570	STAY, AIR CLEANER	1	
16604-11621	PIPE	1	
15401-11720	PIPE, BAND	1	
15606-11720	PIPE, BAND	1	
38430-13940	SUPPORT, AIR CLEANER	1	

B12	AIR		
P/N	DESCRIPTION	QTY	NOTE
15606-11010	ASSY AIR CLEANER	1	
15606-11 080	ELEMENT, AIR CLEANER	1	^
15606-11160	COVER, AIR CLEANER	1	^
68331-43640	CAP, AIR CLEANER	1	^
15606-92620	BOLT, WING	1	^
15126-11090	ASSY INDICATOR	1	^
15606-11070	ASSY BAND, AIR CLEANER	1	
15401-94430	WASHER, SEAL	1	
19426-89703	CAUTION LABEL	1	
38430-13980	BAND, AIR CLEANER	2	
38430-13970	CUSHION	2	
01123-50820	BOLT	2	
04512-60140	SPRING WASHER	2	
19416-91011	BOLT	2	
19416-11570	STAY, AIR CLEANER	1	
16662-11622	PIPE, INLET	1	
15606-11720	PIPE, BAND	1	
38430-13940	SUPPORT, AIR CLEANER	1	

[more...](#)

B13	AIR		
P/N	DESCRIPTION	QTY	NOTE
15606-11010	ASSY AIR CLEANER	1	
15606-11080	ELEMENT, AIR CLEANER	1	
15606-11160	COVER, AIR CLEANER	1	^
68331-43640	CAP, AIR CLEANER	1	^
15606-92620	BOLT, WING	1	^
15126-11090	ASSY INDICATOR	1	^
15606-11070	ASSY BAND, AIR CLEANER	1	^
15401-94430	WASHER, SEAL	1	
19426-89703	CAUTION LABEL	1	
38430-13980	BAND, AIR CLEANER	2	
38430-13970	CUSHION	2	
01123-50820	BOLT	2	
04512-60140	SPRING WASHER	2	
19416-91011	BOLT	2	
19416-11570	STAY, AIR CLEANER	1	
1E013-11660	HOSE, INLET 1	1	
1E013-11630	PIPE, INLET 2	1	
15606-11720	PIPE, BAND	1	
15221-11720	PIPE, BAND	2	
38430-13940	SUPPORT, AIR CLEANER	1	

B31	AIR		
P/N	DESCRIPTION	QTY	NOTE
15742-11010	ASSY AIR CLEANER	1	
17325-11080	ELEMENT, AIR CLEANER	1	
15442-11160	COVER, AIR CLEANER	1	^
15521-92620	BOLT, WING	1	^
15521-94430	WASHER, WITH RUBBER	1	^
15000-36930	BAND, AIR CLEANER	1	^
15000-36920	CUSHION	1	^
01153-50840	BOLT	1	
04512-60140	SPRING WASHER	1	
01120-50816	BOLT	1	
15000-36940	STAY, AIR CLEANER	1	
01123-50820	BOLT	2	
15442-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	1	
15221-11720	BAND	1	
19428-11940	COLLAR, AIR CLEANER	1	
02114-50080	NUT	1	

B32	AIR		
P/N	DESCRIPTION	QTY	NOTE
15521-11010	ASSY AIR CLEANER	1	
15521-11080	ELEMENT, AIR CLEANER	1	
15521-11160	COVER, AIR CLEANER	1	^
15521-92620	BOLT, WING	1	^
15521-94430	WASHER, WITH RUBBER	1	^
38240-13980	BAND, AIR CLEANER	1	^
38240-13970	CUSHION, AIR CLEANER BAND	1	^
38240-13990	BOLT, AIR CLEANER BAND	1	
15521-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	2	
38240-13970	NIT	1	

B33	AIR		
P/N	DESCRIPTION	QTY	NOTE
15471-11010	ASSY AIR CLEANER	1	
15606-11080	ELEMENT, AIR CLEANER	1	
15471-11160	COVER, AIR CLEANER	1	^
15606-92620	BOLT, WING	1	^
15401-94430	WASHER, SEAL	1	^
38430-13980	BAND, AIR CLEANER	2	^
38430-13970	CUSHION	2	^
15461-11620	PIPE, INLET 1	1	
15601-11630	PIPE, INLET 2	1	
15611-11640	PIPE, INLET 3	1	
15401-11720	PIPE, BAND	1	
38430-13940	STAY, AIR CLEANER	1	

B34	AIR		
P/N	DESCRIPTION	QTY	NOTE
15621-11010	ASSY AIR CLEANER	1	
15621-11220	ELEMENT, AIR CLEANER	1	
15621-11160	COVER, AIR CLEANER	1	^
15621-92620	BOLT, WING	1	^
15621-94430	WASHER, SEAL	1	^
36330-19160	CUSHION	1	^
15621-11620	PIPE, INLET 1	1	^
15261-11630	PIPET2, INLET	1	
15621-11642	PIPE, INLET 3	1	
15401-11720	PIPE, BAND	3	
15571-11720	PIPE, BAND	1	

[more...](#)

Option Kits

[...continued](#)

B34	AIR		
P/N	DESCRIPTION	QTY	NOTE
36330-19140	SUPPORT 1, AIR CLEANER	1	
36330-19151	SUPPORT 2, AIR CLEANER	1	
02114-50080	NUT	2	
04512-50080	SPRING WASHER	2	

B41	AIR		
P/N	DESCRIPTION	QTY	NOTE
16853-11010	ASSY AIR CLEANER	1	
15852-11082	ELEMENT, AIR CLEANER	1	^
15221-92620	BOLT, WING	1	^
15221-94430	WASHER, SEAL	1	^
15381-11250	BAND, AIR CLEANER	1	^
15371-11870	CUSHION	1	^
01222-50830	BOLT	1	
16853-11620	PIPE, INLET	1	
15221-11720	BAND	1	
15261-11720	BAND	1	
04512-50080	SPRING WASHER	1	
02114-50080	NUT	1	
01754-50816	BOLT	2	
16853-11570	STAY, AIR CLEANER	1	
01123-50822	BOLT	2	

B42	AIR		
P/N	DESCRIPTION	QTY	NOTE
15372-11016	ASSY AIR CLEANER	1	
19167-11080	ELEMENT, AIR CLEANER	1	
15241-11160	COVER, AIR CLEANER	1	^
15241-11350	CAP, AIR CLEANER	1	^
15221-92620	BOLT, WING	1	^
19426-87903	CAUTION LABEL	1	^
15371-11252	BAND, AIR CLEANER	1	^
15371-11870	CUSHION	1	
01222-50830	BOLT	1	
02114-50080	NUT	1	
04512-50080	SPRING WASHER		
01754-50816	BOLT		
19462-11620	PIPE, INLET		
15221-11720	BAND		
15261-11720	BAND		

B43	AIR		
P/N	DESCRIPTION	QTY	NOTE
16853-11010	ASSY AIR CLEANER	1	
15852-11082	ELEMENT, AIR CLEANER	1	^
15221-92620	BOLT, WING	1	^
15221-94430	WASHER, SEAL	1	^
15381-11250	BAND, AIR CLEANER	1	^
15371-11870	CUSHION	1	^
01222-50830	BOLT	1	
16863-11620	PIPE, INLET	1	
15221-11720	BAND, PIPE	1	
15261-11720	BAND, PIPE	1	
04512-50080	SPRING WASHER	1	
02114-50080	NUT	1	
01754-50816	BOLT	2	
16853-11570	STAY, AIR CLEANER	1	
01123-50822	BOLT	2	

B44	AIR		
P/N	DESCRIPTION	QTY	NOTE
1G657-11010	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
01123-50832	BOLT	2	^
16863-11620	PIPE, INLET	1	^
15221-11720	BAND, PIPE	1	
15261-11720	BAND, PIPE	1	
04015-50080	PLAIN WASHER	2	
04512-50080	SPRING WASHER	2	
1G659-11250	BRACKET	1	
1G659-11570	STAY, AIR CLEANER	2	
01123-50822	BOLT	2	

B45	AIR		
P/N	DESCRIPTION	QTY	NOTE
1G657-11010	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
01123-50832	BOLT	2	^
16853-11620	PIPE, INLET	1	^

[more...](#)

Option Kits

[...continued](#)

B45			
AIR			
P/N	DESCRIPTION	QTY	NOTE
15221-11720	BAND, PIPE	1	
15261-11720	BAND, PIPE	1	
04015-50080	PLAIN WASHER	2	
04512-50080	SPRING WASHER	2	
1G659-11250	BRACKET	1	
1G659-11570	STAY, AIR CLEANER	2	
01123-50822	BOLT	2	
02114-50080	NUT	2	

B46			
AIR			
P/N	DESCRIPTION	QTY	NOTE
1G657-11010	ASSY AIR CLEANER	1	
K1211-82320	ELEMENT, AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	
1G657-11160	COVER, AIR CLEANER	1	Replaced By ^
1G657-11470	VALVE	1	
01123-50832	BOLT	2	
16853-11620	PIPE, INLET	1	
15221-11720	BAND, PIPE	1	
15261-11720	BAND, PIPE	1	
04015-50080	PLAIN WASHER	2	
04512-50080	SPRING WASHER	2	
1G659-11250	BRACKET	1	
1G659-11570	STAY, AIR CLEANER	2	
01123-50822	BOLT	2	
02114-50080	NUT	2	
1G659-11350	AIR CLEANER CAP ASSY	1	

B47			
AIR			
P/N	DESCRIPTION	QTY	NOTE
1G657-11010	ASSY AIR CLEANER	1	^
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
01123-50832	BOLT	2	^
1G952-11620	PIPE, INLET	1	
15221-11720	BAND, PIPE	1	
15261-11720	BAND PIPE	1	
04015-50080 P	PLAIN WASHER	2	
04512-50080	SPRING WASHER	2	

[...continued](#)

B47			
AIR			
P/N	DESCRIPTION	QTY	NOTE
1G659-11250	BRACKET	1	
1G659-11570	STAY, AIR CLEANER	2	
01123-50822	BOLT	2	
02114-50080	NUT	2	

B48			
AIR			
P/N	DESCRIPTION	QTY	NOTE
1G657-11010	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	
1G657-11160	COVER, AIR CLEANER	1	
1G657-11470	VALVE	1	
01123-50832	BOLT	2	
EG561-11640	HOSE, INLET	1	
15221-11720	BAND, PIPE	1	
66704-58250	BAND, PIPE	1	
04015-50080	PLAIN WASHER	2	
04512-50080	SPRING WASHER	2	
1G659-11250	BRACKET	1	
1G659-11570	STAY, AIR CLEANER	2	
01123-50820	BOLT	2	
02114-50080	NUT	2	
EG561-11520	BOLT, AIR CLEANER	2	

B51			
AIR			
P/N	DESCRIPTION	QTY	NOTE
16616-11013	ASSY AIR CLEANER	1	
15741-11083	ELEMENT, AIR CLEANER	1	
15741-92620	BOLT, WING	1	^
15741-99430	WASHER, SEAL	1	^
15741-11470	VALVE	1	^
16616-11350	CAP, AIR CLEANER	1	^
15000-36930	BAND, AIR CLEANER	1	^
15000-36920	CUSHION	1	
01123-50835	BOLT	1	
16266-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	1	
15221-11720	PIPE, BAND	1	
01123-50814	BOLT	2	
16286-11570	STAY, AIR CLEANER	1	
01123-50816	BOLT	2	

[more...](#)

Option Kits

...continued

B52	AIR		
P/N	DESCRIPTION	QTY	NOTE
16616-11013	ASSY AIR CLEANER	1	
15741-11083	ELEMENT, AIR CLEANER	1	^
15741-92620	BOLT, WING	1	^
15741-99430	WASHER, SEAL	1	^
15741-11470	VALVE	1	^
16616-11350	CAP, AIR CLEANER	1	^
15000-36930	BAND, AIR CLEANER	1	
15000-36920	CUSHION	1	
01123-50835	BOLT	1	
16286-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	1	
15221-11720	PIPE, BAND	1	
01123-50814	BOLT	2	
16286-11570	STAY, AIR CLEANER	1	
01123-50816	BOLT	2	

B53	AIR		
P/N	DESCRIPTION	QTY	NOTE
16296-11013	ASSY AIR CLEANER	1	
17351-11083	ELEMENT, AIR CLEANER	1	^
15621-92620	NUT, WING	1	^
15741-99430	WASHER, SEAL	1	^
15741-11470	VALVE	1	^
16296-11350	CAP, AIR CLEANER	1	^
16296-11250	BAND, AIR CLEANER	1	
16296-11870	CUSHION	1	
01123-50840	BOLT	1	
16296-11620	PIPE, INLET	1	
16241-72970	PIPE, BAND	1	
16241-11720	PIPE, BAND	1	
01123-50814	BOLT	3	
16286-11570	STAY, AIR CLEANER	5	
01123-50816	BOLT	2	

B54	AIR		
P/N	DESCRIPTION	QTY	NOTE
16616-11013	ASSY AIR CLEANER	1	
15741-11 083	ELEMENT, AIR CLEANER	1	^
15741-92620	BOLT, WING	1	^
15741-99430	WASHER, SEAL	1	^

B54	AIR		
P/N	DESCRIPTION	QTY	NOTE
15741-11470	VALVE	1	^
16616-11350	CAP, AIR CLEANER	1	^
15000-36930	BAND, AIR CLEANER	1	
15000-36920	CUSHION	1	
01123-50835	BOLT	1	
16616-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	1	
15221-11720	PIPE, BAND	1	
01123-50814	BOLT	2	
16286-11570	STAY, AIR CLEANER	1	
01123-50816	BOLT	1	
01123-50820	BOLT	1	

B54G	AIR		
P/N	DESCRIPTION	QTY	NOTE
16616-11013	ASSY AIR CLEANER	1	
15741-11083	ELEMENT, AIR CLEANER	1	
15741-92620	BOLT, WING	1	^
15741-99430	WASHER, SEAL	1	^
15741-11470	VALVE	1	^
16616-11350	CAP, AIR CLEANER	1	^
15000-36930	BAND, AIR CLEANER	1	^
15000-36920	CUSHION	1	
01123-50835	BOLT	1	
E9121-11620	PIPE, INLET	1	
15401-11720	PIPE, BAND	1	
66704-58250	PIPE, BAND	1	
01123-50814	BOLT	2	
16616-11570	STAY, AIR CLEANER	1	
01123-50816	BOLT	1	
01123-50820	BOLT	1	

B71	AIR		
P/N	DESCRIPTION	QTY	NOTE
19077-11013	ASSY AIR CLEANER	1	
17351-11083	ELEMENT, AIR CLEANER	1	
15621-92620	NUT, WING	1	^
15741-94430	WASHER, SEAL	1	^
15741-11470	VALVE	1	^
16296-11350	CAP, AIR CLEANER	1	^

more...

more...

Option Kits

...continued

B71	AIR		
P/N	DESCRIPTION	QTY	NOTE
38430-13980	BAND, AIR CLEANER	2	^
38430-13970	CUSHION	2	
19426-87903	CAUTION LABEL	1	
32530-13943	SUPPORT, AIR CLEANER	1	
01133-51018	BOLT	2	

B72	AIR		
P/N	DESCRIPTION	QTY	NOTE
19077-11013	ASSY AIR CLEANER	1	
17351-11083	ELEMENT, AIR CLEANER	1	^
15621-92620	NUT, WING	1	^
15741-94430	WASHER, SEAL	1	^
15741-11470	VALVE	1	^
16296-11350	CAP, AIR CLEANER	1	^
38430-13980	BAND, AIR CLEANER	2	
38430-13970	CUSHION	2	
19426-87903	CAUTION LABEL	1	
38430-13940	SUPPORT, AIR CLEANER	1	
01133-51018	BOLT	2	
16454-11620	HOSE, INLET	1	
31351-18110	BAND, PIPE	2	
16454-11570	STAY, AIR CLEANER	1	
01233-50816	BOLT	1	
01123-50818	BOLT	2	

B73	AIR		
P/N	DESCRIPTION	QTY	NOTE
16414-11013	ASSY AIR CLEANER	1	
15741-11083	ELEMENT, AIR CLEANER	1	
15741-92630	NUT, WING	1	^
15741-94430	WASHER, SEAL	1	^
15741-11470	VALVE	1	^
16616-11350	CAP, AIR CLEANER	1	^
38240-13970	CUSHION		^
19426-87903	CAUTION LABEL		
01123-50845	BOLT		
16414-11622	PIPE, INLET		
31351-18110	BAND, PIPE		
15401-11720	BAND, PIPE		
16414-11570	STAY, AIR CLEANER		

...continued

B73	AIR		
P/N	DESCRIPTION	QTY	NOTE
01123-50816	BOLT	2	
01123-50818	BOLT	2	

<K03T4ACS	AIR CLEANER SUPPORT		
P/N	DESCRIPTION	QTY	NOTE
72000-00502	SUPPORT BRACKET	1	
01123-50830	M8 BOLT	3	
72000-00501	ELBOW	1	
15606-11721	BAND PIPE	1	

<KV33AC	AIR CLEANER		
P/N	DESCRIPTION	QTY	NOTE
1G518-11620	AIR INLET HOSE	1	
G070017	AIR CLEANER ASSY	1	
P777731	MOUNTING BAND	1	
01123-51220	BOLT	2	
00123-50830	BOLT	2	
04012-50080	WASHER	2	
04512-60080	WASHER LOCK	2	
02056-50080	NUT	2	
15571-11720	HOSE CLAMP	1	
68811-42270	HOSE CLAMP	1	
72000-00562	AIR CLEANER SUPPORT	1	
P827653	FILTER ASSY	1	
P829332	INNER FILTER	1	

<KV33TAC	AIR CLEANER		
P/N	DESCRIPTION	QTY	NOTE
G082526	AIR CLEANER	1	
P77732	MOUNTING BAND	1	
72000-00563	BRACKET	1	
72000-00566	HOSE	1	
01123-50820	BOLT	2	
01123-50830	BOLT	2	
04012-50080	WASHER	4	
02056-50080	NUT	2	
01123-51025	BOLT	1	
04013-50100	WASHER	1	
3A151-74470	HOSE CLAMP	1	
15401-11720	HOSE CLAMP	1	

^ This kit requires hose 72000-00630 when used with a V2003MT engine.

[more...](#)

more...

Option Kits

...continued

<KV33TAC	AIR CLEANER		
P/N	DESCRIPTION	QTY	NOTE
P828889	FILTER ASSY	1	
P829333	INNER FILTER	1	

<KV38AC	AIR CLEANER SUPPORT		
P/N	DESCRIPTION	QTY	NOTE
G070018	AIR CLEANER	1	
P777731	MOUNTING BAND	1	
72000-00563	MOUNTING BRACKET	1	
72000-00564	INLET HOSE	1	
01123-50820	BOLT	2	
01123-50830	BOLT	2	
04012-50080	WASHER PLAIN	4	
02056-50080	NUT	2	
01123-51025	BOLT	1	
04013-50100	WASHER PLAIN	1	
11571-11720	HOSE CLAMP	1	
33980-74460	HOSE CLAMP	1	
P887653	FILTER ASSY	1	
P829332	INNER FILTER	1	

<KV38TAC	AIR CLEANER		
P/N	DESCRIPTION	QTY	NOTE
G082526	AIR CLEANER	1	
P777732	MOUNTING BAND	1	
72000-00563	BRACKET	1	
72000-00565	HOSE	1	
01123-50820	BOLT	2	
01123-50830	BOLT	2	
04012-50080	WASHER PLAIN	4	
02056-50080	NUT	2	
01123-51025	BOLT	1	
04013-501 00	WASHER PLAIN	1	
3A151-74470	HOSE CLAMP	1	
33980-74460	HOSE CLAMP	1	
P828889	FILTER ASSY	1	
P829333	INNER FILTER	1	

<G02	AIR CLEANER SUPPORT		
P/N	DESCRIPTION	QTY	NOTE
19416-11573	AIR CLEANER STAY	1	
19414-10821	SUPPORT	1	

more...

...continued

<G02	AIR CLEANER SUPPORT		
P/N	DESCRIPTION	QTY	NOTE
01133-51225	BOLT	2	
01173-51225	BOLT	2	
04512-50120	SPRING WASHER	2	

D02	FUEL		
P/N	DESCRIPTION	QTY	NOTE
19204-43014	ASSY FILTER,FUEL	1	
15231-43560	ELEMENT, FILTER	1	^
14301-43650	O-RING, FILTER CUP	1	^
15393-43100	ASSY CUP, FILTER	1	^
14301-43570	O-RING, FILTER CUP	1	^
14301-43590	RING, RETAINING	1	
19427-43432	HOLDER,FUEL FILTER	1	
01153-50865	HEX.BOLT	1	
04013-50080	WASHER, PLAIN	1	
04512-50080	WASHER,SPRING LOCK	1	

D04	FUEL		
P/N	DESCRIPTION	QTY	NOTE
15291-43012	FUEL FILTER ASSY.	1	
15601-43170	ELEMENT, FILTER	1	^
19416-43433	HOLDER, FUEL FILTER	1	
01123-50825	BOLT	2	

D06	FUEL		
P/N	DESCRIPTION	QTY	NOTE
19077-43012	FUEL FILTER ASSY.	1	
16631-43560	ELEMENT, FILTER	1	^
17298-43430	HOLDER,FUEL FILTER	1	
01133-51025	BOLT	2	

D07	FUEL		
P/N	DESCRIPTION	QTY	NOTE
15601-43012	FUEL FILTER ASSY.		
15601-43170	ELEMENT, FILTER		^
19416-43433	HOLDER, FUEL FILTER		
01123-50825	BOLT		

D08	FUEL		
P/N	DESCRIPTION	QTY	NOTE
15601-43012	FUEL FILTER ASSY.	1	
15601-43170	ELEMENT, FILTER	1	^

more...

Option Kits

...continued

D08 FUEL			
P/N	DESCRIPTION	QTY	NOTE
19416-43433	HOLDER, FUEL FILTER	1	
01123-50825	BOLT	2	

D09 FUEL			
P/N	DESCRIPTION	QTY	NOTE
15224-43013	FUEL FILTER ASSY.	1	
15221-43170	ELEMENT, FILTER	1	^
19416-43433	HOLDER, FUEL FILTER	1	
01123-50822	BOLT	2	

D10 FUEL			
P/N	DESCRIPTION	QTY	NOTE
15393-43019	FUEL FILTER ASSY	1	
15231-43560	ELEMENT, FILTER	1	^
14301-43650	O-RING, FILTER CUP	1	^
15393-43100	ASSY CUP, FILTER	1	^
14301-43570	O RING, FILTER	1	^
14301-43590	RING, RETAINING	1	
19653-43432	FUEL FILTER HOLDER	1	
01153-50865	BOLT	1	
04013-50080	PLAIN WASHER	1	
04512-50080	SPRING WASHER	1	
01123-50820	BOLT	2	

D31 FUEL			
P/N	DESCRIPTION	QTY	NOTE
15393-43019	FUEL,FILTER ASSY	1	
15231-43560	ELEMENT, FILTER	1	
14301-43650	O RING, FILTER CUP	1	^
15393-43100	ASSY CUP, FILTER	1	^
14301-43570	O RING, FILTER CUP	1	^
14301-43590	RING, RETAINING	1	^
19427-43430	STAY, FUEL FILTER	1	
01153-50865	BOLT	1	
04013-50080	PLAIN WASHER	1	
04512-50080	SPRING WASHER	1	
15905-42110	PIPE, FUEL	1	
14301-42750	CLIP, PIPE	4	
19286-42521	PIPE, FUEL	1	
10244-42320	CLIP, PIPE	4	

D32 FUEL			
P/N	DESCRIPTION	QTY	NOTE
16665-43014	FUEL,FILTER ASSY	1	
16665-43160	ELEMENT, FILTER	1	
04811-50650	O RING, FILTER CUP	1	^
15521-43100	ASSY CUP, FILTER	1	^
04811-43930	O RING, FILTER	1	^
15521-43150	RING, RETAINING	1	^
19228-43430	HOLDER, FUEL FILTER	1	
01123-50825	BOLT	2	
15905-42110	PIPE, FUEL	1	
14301-42750	CLIP, PIPE	4	
19286-42520	PIPE, FUEL	1	
10244-42320	CLIP, PIPE	4	

D41 FUEL			
P/N	DESCRIPTION	QTY	NOTE
15393-43019	ASSY FILTER,FUEL	1	
15231-43560	ELEMENT, FILTER	1	^
14301-43650	O RING, FILTER CUP	1	^
15393-43100	ASSY CUP, FILTER	1	^
14301-43570	O RING, FILTER	1	^
14301-43590	RING, RETAINING	1	
19653-43432	HOLDER,FUEL FILTER	1	
01153-50865	HEX.BOLT	1	
04013-50080	WASHER,PLAIN	1	
04512-50080	WASHER,SPRING LOCK1	1	
01123-50820	BOLT,SEMS	2	
16266-42022	ASSY PIPE,FUEL	1	

D42 FUEL			
P/N	DESCRIPTION	QTY	NOTE
15393-43019	ASSY FILTER,FUEL	1	
15231-43560	ELEMENT, FILTER	1	^
14301-43650	a-RING, FILTER CUP	1	^
15393-43100	ASSY CUP, FILTER	1	^
14301-43570	a-RING, FILTER	1	^
14301-43590	RING, RETAINING	1	
19653-43432	HOLDER,FUEL FILTER	1	
01153-50865	HEX.BOLT	1	
04013-50080	WASHER,PLAIN	1	
04512-50080	WASHER,SPRING LOCK1	1	

[more...](#)

Option Kits

...continued

D42	FUEL		
P/N	DESCRIPTION	QTY	NOTE
01123-50820	BOLT,SEMS	2	
16863-42020	ASSY PIPE,FUEL	1	

D43	FUEL		
P/N	DESCRIPTION	QTY	NOTE
19204-43014	ASSY FILTER,FUEL	1	
15231-43560	ELEMENT, FILTER	1	
14301-43650	O RING, FILTER CUP	1	^
15393-43100	ASSY CUP, FILTER	1	^
14301-43570	O-RING, FILTER	1	^
14301-43590	RING, RETAINING	1	^
19653-43430	HOLDER,FUEL FILTER	1	
01153-50865	HEX.BOLT	1	
04013-50080	WASHER, PLAIN	1	
04512-50080	WASHER,SPRING LOCK	1	
01123-50820	BOLT	1	

D51	FUEL		
P/N	DESCRIPTION	QTY	NOTE
15224-43010	ASSY FILTER,FUEL		
15221-43170	ELEMENT, FILTER		^
16286-43430	HOLDER,FUEL FILTER		
01123-50822	HEX.BOLT		
16285-42022	ASSY, FUEL PIPE 2		

D52	FUEL		
P/N	DESCRIPTION	QTY	NOTE
15224-43010	ASSY FILTER, FUEL	1	
15221-43170	ELEMENT, FILTER	1	^
16286-43430	HOLDER, FUEL FILTER	1	
01123-50822	HEX. BOLT	2	
16286-42020	ASSY, FUEL PIPE 2	1	

16632-43001	FUEL		
P/N	DESCRIPTION	QTY	NOTE
15451-43352	SEDIMENTOR ASSY	1	
15451-43380	ELEMENT, FILTER	1	^
15451-96840	O RING, TOP BOLT	1	^
15451-43320	GASKET, UPPER BODY	1	^
15351-43330	GASKET, LOWER BODY	2	^
15451-42170	PIPE 1	2	

...continued

16632-43001	FUEL		
P/N	DESCRIPTION	QTY	NOTE
16541-95790	JOINT BOLT	2	
17105-33680	PACKING	4	

16614-43001	FUEL		
P/N	DESCRIPTION	QTY	NOTE
15831-43353	SEDIMENTOR ASSY	1	
15831-43090	KIT ELEMENT, FILTER	1	*
16271-43570	O-RING, FILTER CUP	1	^
15831-43100	ASSY CUP, FILTER	1	^
16271-43590	RING, RETAINING	1	^
15831-43250	FLOAT	1	^
17208-43360	BRACKET, SEDIMENTOR	1	
01754-50870	FLAGE BOLT	1	
* INCLUDES : ELEMENT FILTER AND O-RING			

CO1	MUFFLER KIT		
P/N	DESCRIPTION	QTY	NOTE
66711-54411	PIPE EXHAUST	1	
66711-54421	BAND EXHAUST	1	
01150-50865	BOLT	1	
04013-50080	PLAIN WASHER	2	
04512-50080	SPRING WASHER	1	
02114-50080	NUT	1	
15262-12111	MUFFLER	1	
66811-54512	COVER MUFFLER	1	
01202-50612	BOLT	4	
04012-50060	PLAIN WASHER	4	
66711-54551	FLANGE COVER LEFT	1	
66711-54561	FLANGE COVER RIGHT	1	
01050-50628	BOLT	2	
04512-50060	SRING WASHER	2	
02014-50060	NUT	2	
19427-12671	CAP MUFFLER	1	
19427-12681	CAP BAND	1	
05122-50612	PIN	1	
05511-51612	PIN SPLIT	1	
04012-50060	PLAIN WASHER	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	WASHER	1	

more...

Option Kits

CO2	MUFFLER KIT		
P/N	DESCRIPTION	QTY	NOTE
66711-54411	PIPE EXHAUST	1	
66711-54422	BAND EXHAUST	1	
01150-50865	BOLT	1	
014013-50080	WASHER PLAIN	2	
04512-50080	SPRING WASHER	1	
02114-50080	NUT	1	
15371-12113	MUFFLER	1	
66711-54522	COVER MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	WASHER PLAIN	4	
66711-54552	FLANGE COVER LEFT	1	
66711-54562	FLANGE COVER RIGHT	1	
01050-50628	BOLT	2	
04512-50060	WASHER SPRING	2	
02014-50060	NUT	2	
19427-12671	CAP MUFFLER	1	
19427-12681	BAND CAP	1	
05122-50612	PIN	1	
05511-51612	PIN	1	
04012-50060	WASHER PLAIN	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	SPRING WASHER	1	

C03	MUFFLER KIT 1		
P/N	DESCRIPTION	QTY	NOTE
15442-12112	MUFFLER	1	
15221-12413	PIPE EXHAUST	1	
15221-12433	BAND EXHAUST	1	
01053-50860	BOLT	1	
04013-50080	WASHER PLAIN	2	
04512-50080	WASHER SPRING	1	
02114-50080	NUT	1	
19427-12671	CAP MUFFLER	1	
19427-12681	BAND CAP	1	
05122-50612	PIN	1	
05511-51612	PIN SPLIT	1	
04012-50060	WASHER PLAIN	1	
01053-50620	BOLT	1	

...continued

C03	MUFFLER KIT 1		
P/N	DESCRIPTION	QTY	NOTE
02056-50060	NUT	1	
04512-50060	WASHER SPRING	1	

C05	MUFFLER KIT 1		
P/N	DESCRIPTION	QTY	NOTE
15521-12113	MUFFLER	1	
01123-50825	BOLT	4	
19494-12671	CAP MUFFLER	1	
19494-12681	BAND MUFFLER CAP	1	
05122-50612	PIN	1	
05511-51612	SPLIT PIN	1	
04012-50060	WASHER PLAIN	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	WASHER SPRING	1	

C06	MUFFLER KIT 1		
P/N	DESCRIPTION	QTY	NOTE
17391-12111	MUFFLER	1	
01123-50825	BOLT	4	
19418-12671	CAP MUFFLER	1	
19418-12681	BAND MUFFLER CAP	1	
05122-50612	PIN	1	
05511-51612	SPLIT PIN	1	
04012-50060	PLAIN WASHER	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	SPRING WASHER	1	

C31	MUFFLER KIT 2		
P/N	DESCRIPTION	QTY	NOTE
66711-54411	PIPE EXHAUST	1	
66711-54422	BAND EXHAUST	1	
01150-50865	BOLT	1	
04013-50080	PLAIN WASHER	2	
04512-50080	SPRING WASHER	1	
02114-50080	NUT	1	
15262-12111	MUFFLER	1	
66811-54512	COVER MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	PLAIN WASHER	4	

more...

more...

Option Kits

[...continued](#)

C31	MUFFLER KIT 2		
P/N	DESCRIPTION	QTY	NOTE
66711-54551	FLANGE COVER LEFT	1	
66711-54561	FLANGE COVER RIGHT	1	
01050-50628	BOLT	2	
04512-50060	SPRING WASHER	2	
02014-50060	NUT	2	

C32	MUFFLER KIT 2		
P/N	DESCRIPTION	QTY	NOTE
66711-54411	PIPE EXHAUST	1	
66711-54422	BAND EXHAUST	1	
01150-50865	BOLT	1	
04013-50080	PLAIN WASHER	2	
04512-50080	SPRING WASHER	1	
02114-50080	NUT	1	
15371-12111	MUFFLER	1	
66711-54521	COVER MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	PLAIN WASHER	4	
66711-54551	FLANGE COVER LEFT	1	
66711-54561	FLANGE COVER RIGHT	1	
01050-50628	BOLT	2	
04512-50060	SPRING WASHER	2	
02014-50060	NUT	2	

C33	MUFFLER KIT 2		
P/N	DESCRIPTION	QTY	NOTE
15442-12111	MUFFLER	1	
15221-12412	EXHAUST PIPE	1	
15221-12432	BAND EXHAUST PIPE	1	
01053-50860	BOLT	1	
04013-50080	PLAIN WASHER	2	
04512-50080	SPRING WASHER	1	
02114-50080	NUT	1	

C34	MUFFLER KIT 2		
P/N	DESCRIPTION	QTY	NOTE
15521-12112	MUFFLER	1	
01123-50825	BOLT	4	
15371-12371	PACKING MUFFLER	1	

C36	MUFFLER KIT 2		
P/N	DESCRIPTION	QTY	NOTE
1G952-12111	MUFFLER	1	
66711-54522	COVER	1	
01202-50612	BOLT	4	
04013-50060	WASHER PLAIN	4	
66711-54552	FLANGE COVER LEFT	1	
66711-54562	FLANGE COVER RIGHT	1	
04512-50060	WASHER SPRING	1	
01053-50628	BOLT	2	
04512-50060	WASHER SPRING	2	
02014-50060	NUT	2	
66711-54411	PIPE EXHAUST	1	
66711-54422	BAND PIPE EXHAUST	1	
01150-50865	BOLT	1	
04012-50080	WASHER PLAIN	2	
04512-50080	WASHER SPRING	1	
02114-50080	NUT	1	

C51	MUFFLER KIT 1		
P/N	DESCRIPTION	QTY	NOTE
16286-12110	MUFFLER	1	
01123-50823	BOLT	4	
19427-12671	CAP MUFFLER	1	
19428-12681	BAND CAP	1	
05122-50612	PIN	1	
05511-51612	SPLIT PIN	1	
04012-50060	WASHER PLAIN	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	WASHER SPRING	1	
15263-12371	GASKET MUFFLER	1	
16296-12111	MUFFLER KIT 1	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	SPRING WASHER	1	
16617-12671	CAP MUFFLER	1	
05122-50612	PIN	1	
04012-50060	PLAIN WASHER	1	
05511-51612	SPLIT PIN	1	
16617-12681	BAND MUFFLER CAP	1	

[more...](#)

Option Kits

...continued

C51	MUFFLER KIT 1		
P/N	DESCRIPTION	QTY	NOTE
01123-50825	BOLTR	4	
15263-12371	GASKET MUFFLER	1	

C52	MUFFLER KIT 1		
P/N	DESCRIPTION	QTY	NOTE
16296-12111	MUFFLER KIT 1	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	SPRING WASHER	1	
16617-12671	CAP MUFFLER	1	
05122-50612	PIN	1	
04012-50060	PLAIN WASHER	1	
05511-51612	SPLIT PIN	1	
16617-12681	BAND MUFFLER CAP	1	
01123-50825	BOLTR	4	
15263-12371	GASKET MUFFLER	1	

C72	MUFFLER KIT 1		
P/N	DESCRIPTION	QTY	NOTE
16484-12111	MUFFLER	1	
17326-12231	GASKET MUFFLER	1	
01123-50825	BOLT	4	

19418-12002 MUFFLER KIT 1			
P/N	DESCRIPTION	QTY	NOTE
15621-12111	MUFFLER	1	
01133-51025	BOLT	4	
19418-12671	CAP MUFFLER	1	
19418-12681	BAND MUFFLER CAP	1	
05122-50612	PIN	1	
05511-51612	SPLIT PIN	1	
04012-50060	PLAIN WASHER	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	SPRING WASHER	1	

19883-12001 MUFFLER KIT 1			
P/N	DESCRIPTION	QTY	NOTE
66711-54411	EXHAUST MANIFOLD	1	
66711-54422	BAND EXHAUST MANIFOLD	1	
01150-50865	BOLT	1	
04013-50080	PLAIN WASHER	2	
04512-50080	SPRING WASHER	1	
02114-50080	NUT	1	
15881-12111	MUFFLER	1	
66811-54512	COVER MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	PLAIN WASHER	4	
66711-54551	COVER FLANGE LEFT	1	
66711-54561	COVER FLANGE RIGHT	1	
01050-50628	BOLT	2	
04512-50060	SPRING WASHER	2	
02014-50060	NUT	2	
19427-12671	CAP MUFFLER	1	
19427-12681	BAND MUFFLER CAP	1	
05122-50612	PIN	1	
04012-50060	PLAIN WASHER	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	SPRING WASHER	1	
05511-51612	SPLIT PIN	1	

19496-12001 MUFFLER KIT 3			
P/N	DESCRIPTION	QTY	NOTE
14952-12112	MUFFLER ASSY	1	
14952-12132	BAND MUFFLER	1	
01153-50835	BOLT	1	
02114-50080	NUT	1	
04512-50080	SPRING WASHER	1	

19219-12001 MUFFLER KIT 3			
P/N	DESCRIPTION	QTY	NOTE
15274-12321	EXHAUST MANIFOLD	1	
19246-12371	PACKING	1	
34159-62193	MUFFLER	1	
54266-81781	BAND MUFFLER	1	
04012-50080	PLAIN WASHER	1	
04512-50080	SPRING WASHER	1	

[more...](#)

Option Kits

...continued

19219-12001 MUFFLER KIT 3			
P/N	DESCRIPTION	QTY	NOTE
02156-50080	NUT	1	
54266-81731	PIPE MUFFLER	1	

19064-12001 MUFFLER KIT 4			
P/N	DESCRIPTION	QTY	NOTE
76611-58513	MUFFLER	1	
15381-112361	PACKING EXHAUST	1	
15694-91482	STUD	3	
15694-91492	STUD	3	
02056-50060	NUT	6	
04013-50060	PLAIN WASHER	6	
04512-50060	SPRING WASHER	6	

14397-12001 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
14397-12321	EXHAUST MANIFOLD	1	
14397-12371	PACKING MUFFLER	1	
14397-12111	MUFFLER	1	
01754-50825	FLANGE BOLT	4	

19246-12001 MUFFLER KIT 2			
P/N	DESCRIPTION	QTY	NOTE
15274-12321	EXHAUST MANIFOLD	1	
19246-12371	PACKING	1	
15272-12111	MUFFLER	1	
54266-81781	BAND MUFFLER	1	
04013-50080	PLAIN WASHER	1	
04512-50080	SPRING WASHER	1	
02156-50080	NUT	1	

19275-12003 MUFFLER KIT 2			
P/N	DESCRIPTION	QTY	NOTE
15221-12116	MUFFLER	1	
15221-12133	BAND MUFFLER	1	
01153-50880	BOLT	1	
04012-50080	WASHER PLAIN	2	
04512-50080	WASHER SPRING	1	
02156-50080	NUT	1	
15221-12325	FLANGE MUFFLER	1	
15313-12371	GASKET MUFFLER	1	

19258-12001 MUFFLER KIT 2			
P/N	DESCRIPTION	QTY	NOTE
15621-12111	MUFFLER	1	
01133-51025	BOLT	4	
15621-12231	PACKING MUFFLER	1	

19286-12001 MUFFLER KIT 2			
P/N	DESCRIPTION	QTY	NOTE
16286-12111	MUFFLER	1	
01123-50822	BOLT	4	

16296-12001 MUFFLER KIT 1			
P/N	DESCRIPTION	QTY	NOTE
16296-12111	MUFFLER	1	
01123-50822	BOLT	4	

19077-12003 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
19077-12111	MUFFLER	1	
01123-50825	BOLT	4	
17326-12231	GASKET	1	

16662-12003 MUFFLER KIT 4			
P/N	DESCRIPTION	QTY	NOTE
19077-12111	MUFFLER	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	WASHER SPRING	1	
16617-12671	CAP MUFFLER	1	
05122-50612	PIN	1	
04011-50060	WASHER PLAIN	1	
05511-51612	PIN SPLIT	1	
16617-12681	BAND MUFFLER CAP	1	
01123-50825	BOLT	4	
17326-12231	GASKET	1	

16285-12004 MUFFLER KIT 4			
P/N	DESCRIPTION	QTY	NOTE
37560-88513	MUFFLER	1	
37560-88532	STAY MUFFLER	1	
01774-51020	FLANGE BOLT	2	
01123-50828	BOLT	2	
01123-50816	BOLT	2	
01153-50865	BOLT	1	

[more...](#)

Option Kits

[...continued](#)

16285-12004 MUFFLER KIT 4			
P/N	DESCRIPTION	QTY	NOTE
16271-91511	STUD	4	
16271-91521	STUD 2	4	
16271-05511	PIPE BREATHER	1	
16241-33511	BAND PIPE	1	
16271-92011	NUT	8	
04013-50080	WASHER PLAIN	2	
66711-54422	BAND MUFFLER	1	
04512-50080	WASHER SPRING	2	
02156-50080	NUT	1	
16271-03451	HEAD BOLTS	4	
37560-12361	GASKET MANIFOLD	1	

16264-12003 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
76630-58514	MUFFLER	1	
76630-58111	MUFFLER COVER	1	
16261-95111	STUD 1	3	
16261-91521	STUD 2	3	
16271-92011	NUT	6	
16261-12351	PACKING	1	
01754-50610	FLANGE BOLT	3	
16271-05511	BREATHING TUBE	1	
16241-33511	PIPE BAND	1	

16664-12002 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
34070-16413	MUFFLER	1	
01123-50825	BOLT	4	
17326-12231	GASKET	1	
34520-16414	MUFFLER	1	
34550-16452	MUFFLER COVER	1	
01754-50816	FLANGE BOLT	1	
34550-16424	STAY MUFFLER	1	
01754-50608	FLANGE BOLT	4	
01123-50830	BOLT	3	
17383-12371	PACKING MUFFLER	1	

17559-12004 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
34550-16414	MUFFLER	1	

[more...](#)
[...continued](#)

17559-12004 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
34550-16452	MUFFLER COVER	1	
01754-50816	FLANGE BOLT	1	
34550-16425	STAY MUFFLER	1	
01123-50830	BOLT	3	
01754-50608	FLANGE BOLT	4	
17383-12371	GASKET	1	

1729812002 MUFFLER KIT 2			
P/N	DESCRIPTION	QTY	NOTE
16484-12111	MUFFLER	1	
19491-12671	CAP MUFFLER	1	
05122-50612	PIN	1	
05511-51612	SPLIT PIN	1	
04012-50060	PLAIN WASHER	1	
19491-12681	BAND CAP MUFFLER	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	SPRING WASHER	1	
01123-50825	BOLT	4	
17326-12231	GASKET	1	

1G952-12001 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
1G952-12111	MUFFLER	1	
66711-5422	MUFFLER COVER	1	
01202-50612	BOLT	4	
04013-50060	WASHER PLAIN	4	
66711-54552	FLANGE COVER LEFT	1	
66711-54562	FLANGE COVER RIGHT	1	
04512-50060	SPRING WASHER	3	
01053-50628	BOLT	2	
02014-50060	NUT	2	
66711-54411	PIPE EXHAUST	1	
01150-50865	BOLT	1	
04013-50080	WASHER PLAIN	2	
04512-50080	WASHER SPRING	1	
02114-50080	NUT	1	

E9122-12001 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
E9122-12111	MUFFLER	1	

[more...](#)

Option Kits

[...continued](#)

E9122-12001 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
01123-50825	BOLT	4	
16617-12671	CAP MUFFLER	1	
16617-12681	BAND CAP	1	
05122-50612	PIN	1	
05511-51612	SPLIT PIN	1	
04012-50060	PLAIN WASHER	1	
01050-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	WASHER SPRING	1	
15263-12371	GASKET MUFFLER	1	

EG561-12001 MUFFLER KIT			
P/N	DESCRIPTION	QTY	NOTE
12582-12112	MUFFLER	1	
12691-54513	COVER MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	PLAIN WASHER	4	
01123-50812	BOLT	1	
04013-50080	PLAIN WASHER	1	
66711-54552	FLANGE COVER LEFT	1	
66711-54562	FLANGE COVER RIGHT	1	
01053-50628	BOLT	2	
04512-50060	SPRING WASHER	2	
02014-50060	NUT	2	
14911-12414	PIPE MUFFLER	1	
14431-12433	PIPE BAND	1	
14911-12474	COVER MUFFLER PIPE	1	
01222-50608	BOLT	2	
04512-50060	SPRING WASHER	2	

KV3MFLR			
P/N	DESCRIPTION	QTY	NOTE
72000-00548	MUFFLER	1	
72000-00504	45 DEGREE PIPE	1	
72000-00505	MUFFLER CLAMP	1	

F08X COMPLETE ACCY			
P/N	DESCRIPTION	QTY	NOTE
15372-11016	ASSY AIR CLEANER	1	
19167-11080	ELEMENT, AIR CLEANER	1	^
15241-11160	COVER, AIR CLEANER	1	^

[...continued](#)

F08X COMPLETE ACCY			
P/N	DESCRIPTION	QTY	NOTE
15241-11350	CAP, AIR CLEANER	1	^
15221-92620	BOLT, WING	1	^
19426-89703	CAUTION LABEL	1	
15371-11252	BAND, AIR CLEANER	1	
15371-11870	CUSHION	1	
01222-50830	BOLT	1	
02114-50080	NUT	1	
04512-50080	SPRING WASHER	1	
01123-50820	BOLT	2	
12581-11620	PIPE, INLET	1	
15221-11720	BAND, PIPE	1	
66704-58250	BAND, PIPE	1	
12691-72060	ASSY RADIATOR	1	
15401-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL, RADIATOR	1	
19426-87880	LABEL, COOLANT	1	
12594-72850	RADIATOR HOSE (LOWER)	1	
12594-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP, HOSE	1	
09318-89036	CLAMP, HOSE	2	
15841-72960	CLAMP, HOSE	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER, PLAIN	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
66711-54410	PIPE, EXHAUST	1	
66711-54420	BAND, EXHAUST PIPE	1	
01153-50865	BOLT	1	
04013-50080	WASHER, PLAIN	2	
04512-50080	WASHER, SPRING	1	
02114-50080	NUT	1	
12582-12110	MUFFLER	1	
12691-54510	COVER, MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	WASHER, PLAIN	4	
66711-54550	COVER(L), MUFFLER FLANGE	1	
66711-54560	COVER(R), MUFFLER FLANGE	1	

[more...](#)
[more...](#)

Option Kits

...continued

F08X	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
01053-50630	BOLT	2	
04512-50060	WASHER, SPRING	2	
02014-50060	NUT	2	
12581-55120	STARTER SWITCH ASSY.	1	
66711-55240	KEY	1	^

F08XX	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
15372-11016	ASSY AIR CLEANER	1	
19167-11080	ELEMENT, AIR CLEANER	1	^
15241-11160	COVER, AIR CLEANER	1	^
15241-11350	CAP, AIR CLEANER	1	^
15221-92620	BOLT, WING	1	^
19426-89703	CAUTION LABEL	1	
15371-11252	BAND, AIR CLEANER	1	
15371-11870	CUSHION	1	
01222-50830	BOLT	1	
02114-50080	NUT	1	
04512-50080	SPRING WASHER	1	
01123-50820	BOLT	2	
12581-11620	PIPE, INLET	1	
15221-11720	BAND, PIPE	1	
66704-58250	BAND, PIPE	1	
12594-72060	ASSY RADIATOR	1	
15401-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,COOLANT	1	
12594-72850	RADIATOR HOSE (LOWER)	1	
09318-89030	CLAMP,HOSE	1	
09318-89036	CLAMP,HOSE	2	
15841-72960	CLAMP,HOSE	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER,PLAIN	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
66711-54410	PIPE,EXHAUST	1	
66711-54420	BAND,EXHAUST PIPE	1	
01153-50865	BOLT	1	

...continued

F08XX	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
04013-50080	WASHER,PLAIN	2	
04512-50080	WASHER,SPRING	1	
02114-50080	NUT	1	
12582-12110	MUFFLER	1	
12691-54510	COVER,MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	WASHER,PLAIN	4	
66711-54550	COVER(L), FLANGE	1	
66711-54560	COVER(R), FLANGE	1	
01053-50630	BOLT	2	
04512-50060	WASHER, SPRING	2	
02014-50060	NUT	2	
12581-55120	STARTER SWITCH ASSY.	1	
66711-55240	KEY	1	^

F18X	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
1G657-11010	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
1G659-11350	RAIN CAP ASSY	1	
12581-11620	PIPE, INLET	1	
15221-11720	BAND, PIPE	1	
66704-58250	BAND, PIPE	1	
12691-72060	ASSY RADIATOR	1	
15401-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,COOLANT	1	
12691-72850	RADIATOR HOSE (LOWER)	1	
12691-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP,HOSE	1	
09318-89036	CLAMP,HOSE	2	
15841-72960	CLAMP,HOSE	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER,PLAIN	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	

more...

more...

Option Kits

[...continued](#)

F18X	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
66711-54410	PIPE,EXHAUST	1	
66711-54420	BAND,EXHAUST PIPE	1	
01153-50865	BOLT	1	
04013-50080	WASHER,PLAIN	2	
04512-50080	WASHER,SPRING	1	
02114-50080	NUT	1	
12582-12110	MUFFLER	1	
12691-54510	COVER,MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	WASHER,PLAIN	4	
66711-54550	COVER(L),MUFFLER FLANGE	1	
66711-54560	COVER(R),MUFFLER FLANGE	1	
01053-50630	BOLT	2	
04512-50060	WASHER, SPRING	2	
02014-50060	NUT	2	
12581-55120	STARTER SWITCH ASSY.	1	
66711-55240	KEY	1	^

F18XX	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
1G657-11010	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
1G659-11350	RAIN CAP ASSY	1	
12581-11620	PIPE, INLET	1	
15221-11720	BAND, PIPE	1	
66704-58250	BAND, PIPE	1	
12594-72060	ASSY RADIATOR	1	
15401-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,COOLANT	1	
12594-72850	RADIATOR HOSE (LOWER)	1	
12594-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP,HOSE	1	
09318-89036	CLAMP,HOSE	2	
15841-72960	CLAMP,HOSE	1	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	

[...continued](#)

F18XX	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
15111-72202	WASHER,PLAIN	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
66711-54410	PIPE,EXHAUST	1	
66711-54420	BAND,EXHAUST PIPE	1	
01153-50865	BOLT	1	
04013-50080	WASHER,PLAIN	2	
04512-50080	WASHER,SPRING	1	
02114-50080	NUT	1	
12582-12110	MUFFLER	1	
12691-54510	COVER,MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	WASHER,PLAIN	4	
66711-54550	COVER(L), FLANGE	1	
66711-54560	COVER(R), FLANGE	1	
01053-50630	BOLT	2	
04512-50060	WASHER, SPRING	2	
02014-50060	NUT	2	
12581-55120	STARTER SWITCH ASSY.	1	^
66711-55240	KEY	1	

F19	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
1G657-11010	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
1G659-11350	RAIN CAP ASSY	1	
19426-87903	CAUTION LABEL	1	
1G659-11250	BRACKET	1	
01123-50832	BOLT	2	
02114-50080	NUT	2	
04512-50080	WASHER,SPRING	2	
04015-50080	WASHER,PLAIN	2	
19462-11620	PIPE,INLET	1	
15221-11720	BAND,PIPE	1	
15261-11720	BAND,PIPE	1	
16676-72060	ASSY RADIATOR	1	
15549-72111	RADIATOR [NOT AVAIL]	1	^

[more...](#)
[more...](#)

Option Kits

[...continued](#)

F19	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
16676-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,COOLANT	1	
12594-72850	RADIATOR HOSE (LOWER)	1	
12594-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP,HOSE	2	
09318-89036	CLAMP,HOSE	2	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER,PLAIN	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
66711-54410	PIPE,EXHAUST	1	
66711-54420	BAND,EXHAUST PIPE	1	
01153-50865	BOLT	1	
04013-50080	WASHER,PLAIN	2	
04512-50080	WASHER,SPRING	1	
02114-50080	NUT	1	
15262-12110	MUFFLER	1	
66811-54510	COVER,MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	WASHER,PLAIN	4	
66711-54550	COVER(L),MUFFLER FLANGE	1	
66711-54560	COVER(R),MUFFLER FLANGE	1	
01053-50628	BOLT	2	

F19	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
04512-50060	WASHER,SPRING	2	
02014-50060	NUT	2	
66706-55120	ASSY SWITCH,STARTER	1	
66711-55120	KEY	1	^
19204-43014	ASSY FILTER, FUEL	1	
15231-43560	ELEMENT, FILTER	1	^
14301-43650	O-RING, FILTER CUP	1	^

[...continued](#)

F19	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
15393-43100	ASSY CUP, FILTER	1	^
14301-43570	O-RING, FILTER	1	^
14301-43590	RING, RETAINING	1	^
19427-12670	CAP,MUFFLER	1	
19427-12680	BAND,MUFFLER CAP	1	
05122-50612	PIN	1	
05511-51612	PIN,SPLIT	1	
04012-50060	WASHER,PLAIN	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	WASHER,SPRING	1	
12586-72130	SUPPORT1,RADIATOR	1	
12586-72140	SUPPORT2,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	BOLT	4	
02156-50080	NUT	4	
04512-50080	WASHER,SPRING	4	
1G639-74120	NET,RADIATOR	1	
04014-50060	WASHER,PLAIN	4	
01023-50610	BOLT	4	
19427-74124	COVER,FAN	1	
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER,SPRING	4	
04014-50060	WASHER,PLAIN	8	
19653-43430	HOLDER,FUEL FILTER	1	
01153-50865	BOLT	1	
04013-50080	WASHER,PLAIN	1	
04512-50080	WASHER,SPRING	1	
01123-50820	BOLT	2	

F20	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
66706-55120	ASSY SWITCH,STARTER	1	
66711-55120	KEY	1	^
15262-12110	MUFFLER	1	
66811-54513	COVER, MUFFLER	1	
01202-50612	BOLT	4	
04013-50060	WASHER,PLAIN	4	

[more...](#)
[more...](#)

Option Kits

...continued

F20	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
66711-54550	COVER(L),FLANGE	1	
66711-54560	COVER(R), FLANGE	1	
01053-50628	BOLT	2	
04512-50060	WASHER,SPRING	2	
02014-50060	NUT	2	
66711-54410	PIPE,EXHAUST	1	
66711-54422	BAND,EXHAUST PIPE	1	
01153-50865	BOLT	1	
04013-50080	WASHER,PLAIN	2	
04512-50080	WASHER,SPRING	1	
02114-50080	NUT	1	
15393-43019	FUEL,FILTER ASSY	1	^
15231-43560	ELEMENT, FILTER	1	^
14301-43650	O-RING, FILTER CUP	1	^
15393-43100	ASSY CUP, FILTER	1	^
14301-43570	O-RING, FILTER	1	^
14301-43590	RING, RETAINING	1	
19653-43430	HOLDER,FUEL FILTER	1	
01153-50865	BOLT	1	
04013-50080	WASHER,PLAIN	1	
04512-50080	WASHER,SPRING	1	
01123-50820	BOLT	2	
19653-72060	ASSY RADIATOR	1	^
15861-72111	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
19653-72330	SHROUD, FAN	1	^
15231-73110	COCK, DRAIN	1	^
15861-72710	PIPE, WATER OVERFLOW	1	^
15231-96690	GASKET	1	
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,COOLANT	1	
15861-72850	RADIATOR HOSE (LOWER)	1	
19462-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP,HOSE	1	
15841-72960	BAND,PIPE	3	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	

more...

...continued

F20	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
15111-72202	WASHER,PLAIN	4	

* Above kit does not come with air cleaner *

F20	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
15108-72383	BOLT	2	
05515-51000	PIN,SNAP	2	
1G657-11010	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
1G659-11350	RAIN CAP ASSY	1	
19426-87900	LABEL,ETHER	1	
1G659-11250	BRACKET	1	
01123-50832	BOLT	2	
02114-50080	NUT	2	
04512-50080	WASHER,SPRING	2	
04015-50080	WASHER,PLAIN	2	
19462-11620	PIPE,INLET	1	
15221-11720	BAND,PIPE	1	
15261-11720	BAND,PIPE	1	
19427-12670	CAP,MUFFLER	1	
19427-12680	BAND,MUFFLER CAP	1	
05122-50612	PIN	1	
05511-51612	PIN,SPLIT	1	
04012-50060	WASHER,PLAIN	1	
01053-50620	BOLT	1	
02056-50060	NUT	1	
04512-50060	WASHER,SPRING	1	
16687-72130	SUPPORT1,RADIATOR	1	
16687-72140	SUPPORT2,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	BOLT	4	
02156-50080	NUT	4	
04512-50080	WASHER, SPRING	4	
19653-72250	NET,RADIATOR	1	
04014-50060	WASHER, PLAIN	4	
01023-50610	BOLT	4	
1G637-74120	COVER,FAN	1	

more...

Option Kits

...continued

F20	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
01053-50614	BOLT	4	
02056-50060	NUT	4	
04512-50060	WASHER, SPRING	4	
04014-50060	WASHER, PLAIN	8	

F28X	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
1G657-11010	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
1G659-11350	RAIN CAP ASSY	1	
19426-87903	CAUTION LABEL	1	
1G659-11250	BRACKET	1	
12581-11620	PIPE, INLET	1	
15221-11720	BAND, PIPE	1	
66704-58250	CLAMP	1	
EG601-72060	ASSY RADIATOR	1	
15401-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL(RADIATOR)	1	
EG601-72850	RADIATOR HOSE (LOWER)	1	
12691-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	HOSE CLAMP	1	
15841-72960	BAND, PIPE	1	
09318-89036	HOSE CLAMP	2	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER, PLAIN	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
66711-54410	PIPE, EXHAUST	1	
66711-54422	BAND, EXHAUST PIPE	1	
01153-50865	BOLT	1	
04013-50080	WASHER, PLAIN	2	
04512-50080	WASHER, SPRING	1	
02114-50080	NUT	1	
12582-12110	MUFFLER	1	
12691-54510	MUFFLER COVER	1	
01202-50612	BOLT	4	

...continued

F28X	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
04013-50060	WASHER, PLAIN	4	
66711-54550	COVER(L), MUFFLER FLANGE	1	
66711-54560	COVER(R), MUFFLER FLANGE	1	
01053-50630	BOLT	2	
04512-50060	WASHER, SPRING	2	
02014-50060	NUT	2	
12581-55120	STARTER SWITCH ASSY.	1	
66711-55240	KEY	1	^
19426-87880	LABEL, COOLANT	1	

F28XX	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
1G657-11000	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
1G659-11350	RAIN CAP ASSY	1	
19426-87903	CAUTION LABEL	1	
1G659-11250	BRACKET	1	
12581-11620	PIPE, INLET	1	
15221-11720	BAND, PIPE	1	
66704-58250	CLAMP	1	
EG603-72060	ASSY RADIATOR	1	
15401-72710	PIPE, WATER OVERFLOW	1	
16478-88230	LABEL(RADIATOR)	1	
EG601-72850	RADIATOR HOSE (LOWER)	1	
12691-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	HOSE CLAMP	1	
15841-72960	BAND, PIPE	1	
09318-89036	HOSE CLAMP	2	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER, PLAIN	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
66711-54410	PIPE, EXHAUST	1	
66711-54422	BAND, EXHAUST PIPE	1	
01153-50865	BOLT	1	
04013-50080	WASHER, PLAIN	2	

more...

Option Kits

...continued

F28XX	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
04512-50080	WASHER,SPRING	1	
02114-50080	NUT	1	
12582-12110	MUFFLER	1	
12691-54510	MUFFLER COVER	1	
01202-50612	BOLT	4	
04013-50060	WASHER,PLAIN	4	
66711-54550	COVER(L), FLANGE	1	
66711-54560	COVER(R), FLANGE	1	
01053-50630	BOLT	2	
04512-50060	WASHER,SPRING	2	
02014-50060	NUT	2	
12581-55120	STARTER SWITCH ASSY.	1	
66711-55240	KEY	1	^
19426-87880	LABEL, COOLANT	1	

F31	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
1G657-11000	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	^
1G657-11160	COVER, AIR CLEANER	1	^
1G657-11470	VALVE	1	^
1G659-11350	RAIN CAP ASSY	1	
19426-87903	CAUTION LABEL	1	
1G659-11250	BAND,AIR CLEANER	1	
02156-50080	HEX.NUT	2	
04512-50080	WASHER,SPRING LOCK	2	
04015-50080	WASHER,PLAIN	2	
01123-50832	BOLT,SEMS	2	
19462-11620	PIPE,INLET	1	
15221-11720	BAND,PIPE	1	
15261-11720	BAND,PIPE	1	
1G958-72060	ASSY RADIATOR	1	
1G958-72112	RADIATOR [NOT AVAIL]	1	^
15272-72020	ASSY CAP	1	^
19077-87240	LABEL, CAUTION	1	^
1G958-72330	SHROUD, FAN	1	^
34070-16070	PLUG, DRAIN	1	^
15401-72710	PIPE, WATER OVERFLOW	1	^
34070-16090	O-RING	1	^

F31	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,INSTRUCTION	1	
EG601-72850	RADIATOR HOSE (LOWER)	1	
12594-72940	RADIATOR HOSE (UPPER)	1	
09318-89030	CLAMP HOSE	2	
09318-89036	CLAMP HOSE	2	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
66711-54410	PIPE,MUFFLER	1	
66711-54420	BAND PIPE MUFFLER	1	
01153-50865	HEX.BOLT	1	
04013-50080	WASHER, PLAIN	2	
04512-50080	WASHER,SPRING LOCK	1	
02156-50080	HEX.NUT	1	
15262-12110	MUFFLER	1	
66811-54510	COVER,MUFFLER	1	
01202-50612	BOLT,SEMS(PHILLIPS)	4	
04013-50060	WASHER, PLAIN	4	
66711-54550	COVER,FLANGE LH	1	
66711-54560	COVER,FLANGE RH	1	
01050-50628	BOLT	2	
04512-50060	WASHER,SPRING LOCK	2	
02014-50060	HEX.NUT	2	
66706-55120	ASSY SWITCH,STARTER	1	
66711-55120	KEY	1	^
19204-43014	ASSY FILTER, FUEL	1	
15231-43560	ELEMENT, FILTER	1	^
14301-43650	O-RING, FILTER CUP	1	^
15393-43100	ASSY CUP, FILTER	1	^
14301-43570	O-RING, FILTER	1	^
14301-43590	RING, RETAINING	1	^
19427-12670	CAP,MUFFLER	1	
19427-12680	BAND,MUFFLER CAP	1	
05122-50612	PIN	1	
05511-51612	PIN,SPLIT	1	

more...

[more...](#)

Option Kits

[...continued](#)

F31	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
04012-50060	WASHER, PLAIN	1	
01053-50620	HEX.BOLT	1	
02056-50060	HEX.NUT	1	
04512-50060	WASHER,SPRING LOCK	1	
12586-72130	SUPPORT,RADIATOR	1	
12586-72140	SUPPORT,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	HEX.BOLT	4	
02156-50080	HEX.NUT	4	
04512-50080	WASHER,SPRING LOCK	4	
19426-72250	NET,RADIATOR	1	
04014-50060	WASHER,PLAIN	4	
01023-50610	BOLT,SEMS	4	
1G639-74120	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	
19653-43430	HOLDER,FUEL FILTER	1	
01153-50865	HEX.BOLT	1	
04013-50080	WASHER, PLAIN	1	
04512-50080	WASHER,SPRING LOCK	1	
01123-50820	BOLT,SEMS	2	
01023-50610	BOLT,SEMS	4	
01123-50820	BOLT,SEMS	2	
01023-50610	BOLT,SEMS	4	
EG652-72130	SUPPORT IN RAD	1	
EG652-72140	SUPPORT EX RAD	1	
01025-50610	BOLT	2	
1G639-72170	STAY 2 RAD	1	
01023-50630	BOLT	2	
1G930-72190	CUSHION	1	
02014-50060	NUT	2	
04512-50060	WASHER	2	

F32	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
66706-55120	ASSY SWITCH,STARTER	1	
66711-55120	KEY	1	

[...continued](#)

F32	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
15262-12110	MUFFLER	1	
66811-54510	COVER,MUFFLER	1	
01202-50612	BOLT,SEMS(PHILLIPS)	4	
04013-50060	WASHER, PLAIN	4	
66711-54550	COVER,FLANGE LH	1	
66711-54560	COVER,FLANGE RH	1	
01050-50628	BOLT	2	
04512-50060	WASHER,SPRING LOCK	2	
02014-50060	HEX.NUT	2	
66711-54410	PIPE,MUFFLER	1	
66711-54420	BAND PIPE MUFFLER	1	
01153-50865	HEX.BOLT	1	
04013-50080	WASHER, PLAIN	2	
04512-50080	WASHER,SPRING LOCK	1	
02156-50080	HEX.NUT	1	
15393-43019	FUEL,FILTER ASSY	1	
15231-43560	ELEMENT, FILTER	1	
14301-43650	O-RING, FILTER CUP	1	
15393-43100	ASSY CUP, FILTER	1	
14301-43570	O-RING, FILTER	1	
14301-43590	RING, RETAINING	1	
19653-43430	HOLDER,FUEL FILTER	1	
01153-50865	HEX.BOLT	1	
04013-50080	WASHER, PLAIN	1	
04512-50080	WASHER,SPRING LOCK	1	
01123-50820	BOLT,SEMS	2	
1G957-72060	ASSY RADIATOR	1	
1G957-72111	RADIATOR [NOT AVAIL]	1	
1G957-72330	ASSY CAP	1	
19077-87240	LABEL, CAUTION	1	
1G957-72330	SHROUD, FAN	1	
15861-72710	PIPE, WATER OVERFLOW	1	
34070-16070	PLUG, DRAIN	1	
34070-16090	O-RING	1	
16478-88230	LABEL,RADIATOR	1	
19426-87880	LABEL,INSTRUCTION	1	
1G957-72850	RADIATOR HOSE (LOWER)	1	
1G957-72940	RADIATOR HOSE (UPPER)	1	

[more...](#)
[more...](#)

Option Kits

...continued

F32	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
09318-89030	CLAMP,HOSE	1	
15841-72960	BAND,PIPE	3	
15111-72180	CUSHION	2	
15111-72190	CUSHION	2	
15111-72202	WASHER	4	
15108-72383	BOLT	2	
05515-51000	SNAP PIN	2	
1G657-11000	ASSY AIR CLEANER	1	
1G659-11220	ELEMENT, AIR CLEANER	1	
1G657-11160	COVER, AIR CLEANER	1	
1G657-11470	VALVE	1	
1G659-11350	RAIN CAP ASSY	1	
19426-87900	LABEL	1	
1G659-11250	BAND,AIR CLEANER	1	
02156-50080	HEX.NUT	2	
04512-50080	WASHER,SPRING LOCK	2	
04015-50080	WASHER,PLAIN	2	
01123-50832	BOLT,SEMS	2	
19462-11620	PIPE,INLET	1	
15221-11720	BAND,PIPE	1	
15261-11720	BAND,PIPE	1	
19427-12670	CAP,MUFFLER	1	
19427-12680	BAND,MUFFLER CAP	1	
05122-50612	PIN	1	
05511-51612	PIN,SPLIT	1	
04012-50060	WASHER, PLAIN	1	
01053-50620	HEX.BOLT	1	
02056-50060	HEX.NUT	1	
04512-50060	WASHER,SPRING LOCK	1	
16687-72130	SUPPORT,RADIATOR	1	
16687-72140	SUPPORT,RADIATOR	1	
19416-72150	STAY	1	
01153-50822	HEX.BOLT	4	
02156-50080	HEX.NUT	4	
04512-50080	WASHER,SPRING LOCK	4	
19653-72250	NET,RADIATOR	1	
04014-50060	WASHER,PLAIN	4	
01023-50610	BOLT,SEMS	4	

more...

...continued

F32	COMPLETE ACCY		
P/N	DESCRIPTION	QTY	NOTE
1G637-74120	COVER,FAN	1	
01053-50614	HEX.BOLT	4	
02056-50060	HEX.NUT	4	
04512-50060	WASHER,SPRING LOCK	4	
04014-50060	WASHER,PLAIN	8	
01023-50610	BOLT,SEMS	4	
EG652-72130	SUPPORT IN RAD	1	
EG652-72140	SUPPORT EX RAD	1	
01025-50610	BOLT	2	
1G639-72170	STAY 2 RAD	1	
01023-50630	BOLT	2	
1G930-72190	CUSHION	1	
02014-50060	NUT	2	
04512-50060	WASHER	2	

This page has been left blank intentionally.

Section 7- Miscellaneous

Block Heaters	7-1
Block Heater Contents	7-3
Starter Switches Assemblies & Keys	7-6
Miscellaneous Part Numbers	7-9
Paint	7-9
Batteries	7-9
GL Panel Covers	7-9
GL Remote Starts	7-9
Sealants	7-9
Complete O-Ring Kit	7-9
Machine to Engine Cross Reference	7-10
Glow Plug Specifications	7-14
Alternator Specifications - IC Regulator Type	7-16
AC Dynamo Specifications	7-20
Stop Solenoid Specifications	7-22
Starter Specifications	7-24

Block Heaters

VERTICAL ENGINES						
MODEL		LOCATIONS			CYL CODE	STROKE (mm)
BASE	SPECIFIC	CYL HEAD	BLOCK	RAD HOSE 1.0		
Z400	Z400	70000-73595	~	~	Z	62.2
Z430	Z430	70000-73595	~	~	Z	62.2
D600	ALL	70000-73595	~	~	D	62.2
D640	ALL	70000-73595	~	~	D	62.2
V800	ALL	70000-73595	~	~	V	62.2
WG600	ALL	70000-73595	~	~	D	62.2
Z442	Z442	70000-73595	~	~	Z	68
Z482	Z482	70000-73595	~	~	Z	68
	Z482-E2B	70000-17552	~	~	Z	68
D662	D662	70000-73595	~	~	D	68
	D662-E2B	70000-17552	~	~	D	68
D722	D722	70000-73595	~	~	D	68
	D722-E2B	70000-17552	~	~	D	68
	D722T	70000-73595	~	~	D	68
DF750	ALL	70000-73595	~	~	D	68
DF752	ALL	70000-73595	~	~	D	68
WG750	ALL	70000-73595	~	~	D	68
WG752	ALL	70000-73595	~	~	D	68
				RAD HOSE 1.25		
Z500	ALL	~	~	~	Z	70
Z600	ALL	~	~	~	Z	70
ZB	ALL	~	~	~	Z	70
D650	ALL	~	70000-91510	~	D	70
D750	ALL	~	70000-91510	70000-81500	D	70
D850	ALL	~	70000-91510	70000-81500	D	70
D950	ALL	70000-91510	~	70000-81500	D	70
V1100	ALL	~	70000-91510	70000-81500	V	70
V1200	ALL	~	70000-91510	70000-81500	V	70
Z602	ALL	70000-17552	70000-00846	~	Z	73.6
D782	D782	70000-17552	70000-00846	70000-81500	D	73.6
D902	ALL	~	72000-00546	70000-81500	D	73.6
D905	ALL	70000-91510	~	70000-81500	D	73.6
D1005	ALL	70000-91510	~	70000-81500	D	73.6
DF972	ALL		72000-00546	70000-81500	D	73.6
DF1005	ALL	~	70000-91510	70000-81500	D	73.6
WG972	ALL	70000-73595	~	70000-81500	D	73.6
WG1005	ALL	~	70000-91510	70000-81500	D	73.6
V1205	ALL	~	70000-91510	70000-81500	V	73.6

Block Heaters


...continued

VERTICAL ENGINES						
MODEL		LOCATIONS			CYL CODE	STROKE (mm)
BASE	SPECIFIC	CYL HEAD	BLOCK	RAD HOSE 1.0		
V1305	ALL	~	70000-91510	70000-81500	V	73.6
D1105	D1105	~	70000-91510	70000-81500	D	78.4
	D1105T	~	SEE NOTE 1	70000-81500	D	78.4
V1505	V1505	~	70000-91510	70000-81500	V	78.4
	V1505T	~	SEE NOTE 1	70000-81500	V	78.4
				RAD HOSE 1.50		
Z751	ALL	70000-91530	70000-92500	~	Z	82
Z851	ALL	70000-91530	70000-92500	~	Z	82
D1101	ALL	70000-91530	70000-92500	70000-82500	D	82
D1102	ALL	70000-91530	70000-92500	70000-82500	D	82
D1301	ALL	70000-91530	70000-92500	70000-82500	D	82
D1302	ALL	70000-91530	70000-92500	70000-82500	D	82
D1402	ALL	70000-91530	70000-92500	70000-82500	D	82
V1502	ALL	70000-91530	70000-92500	70000-82500	V	82
V1701	ALL	70000-91530	70000-92500	70000-82500	V	82
V1702	ALL	70000-91530	70000-92500	70000-82500	V	82
V1902	ALL	70000-91530	70000-92500	70000-82500	V	82
D1403	ALL	70000-91530	70000-92500	70000-82500	D	92.4
D1503	ALL	70000-91530	70000-92500	70000-82500	D	92.4
D1703	ALL	70000-91530	70000-92500	70000-82500	D	92.4
V1903	ALL	70000-91530	70000-92500	70000-82500	V	92.4
V2003	ALL	70000-91530	70000-92500	70000-82500	V	92.4
V2203	ALL	70000-91530	70000-92500	70000-82500	V	92.4
V2803	ALL	70000-91530	70000-92500	70000-82500	V	92.4
D1803	ALL	~	~	70000-82500	D	102
V2403	ALL	70000-91530	70000-92500	70000-82500	V	102
V3300	ALL	~	70000-91510	70000-82500	V	110
D3000	ALL	~	~	70000-82500	D	115
V4000	ALL	~	~	70000-82500	V	115
V4300	ALL	~	~	70000-82500	V	115
V3800	ALL	~	70000-91510	70000-82500	V	120
D3502	ALL	~	~	70000-82500	D	125
V4702	ALL	~	~	70000-82500	V	125
F2503	ALL	70000-91530	70000-92500	70000-82500	F	92.4
F2803	ALL	70000-91530	70000-92500	70000-82500	F	92.4
S2200	ALL	70000-91530	70000-92500	70000-82500	S	82
S2600	ALL	70000-91530	70000-92500	70000-82500	S	82
S2800	ALL	70000-91530	70000-92500	70000-82500	S	82

Block Heaters

GENERATORS						
MODEL		LOCATIONS			CYL CODE	STROKE (mm)
BASE	SPECIFIC	CYL HEAD	BLOCK	RAD HOSE		
ZB600GLS	GL6500S	~	1"	72000-01016	Z	70
Z482	GL7000	~	72000-01016	72000-81816	Z	NSM
D722	GL11000	~	72000-01016	70000-81500	D	NSM
D1703	SQ1140	~	70000-92500	70000-82500	D	92.4
V2203	SQ1200	~	70000-92500	70000-82500	V	92.4
V2203	SQ3250	~	70000-92500	70000-82500	V	92.4
V3300	SQ3350	~	70000-91510	70000-82500	V	110

NOTE: The oil cooler supply is taken from the fitting of optional cylinder block heater 70000-91510. Reference Bulletin OEM 99.04

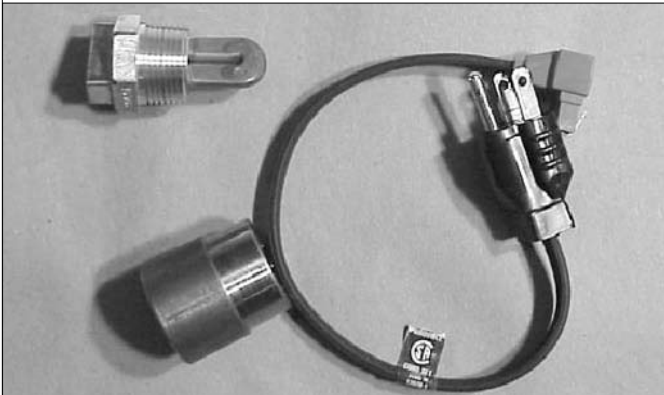70000-92500	
Frost Plug Block Heater 400 Watts, 115 Volts Kubota P/N: 70000-92500	
	
ENGINE APPLICATION:	03 AND 82 MM SERIES
LOCATION:	CYLINDER BLOCK IN FROST PLUG
METHOD OF ATTACHMENT:	KNOCK IN TYPE CORD LENGTH - 12 IN
NOTE: CORD LENGTH = 12", IT IS PERFERABLE TO USE 70000-91530	

70000-91530	
Engine Heater 400 Watts, 115 Volts Code No.: 70000-91530	
	
ENGINE APPLICATION:	03 AND 82 MM SERIES
LOCATION:	CYLINDER HEAD FROST PLUG
METHOD OF ATTACHMENT:	INTERGRAL CLAMP WITH O RING SEAL
NOTE: NOTE: CORD LENGTH 60 IN	

Block Heaters


70000-91510	
For Block Heater 400 Watts, 115 Volts Code No.: 70000-91510 Applicable models: D850, D950	
	
ENGINE APPLICATION:	05,V3300 AND 70 MM SERIES.
LOCATION:	CLYINDER BLOCK 05 SERIES EXHAUST SIDE THREADED PLUG. 3300 INLET SIDE THREADED PLUG 70 MM UNDER FUEL INJECTION PUMP
METHOD OF ATTACHMENT:	TAPERED THREAD
NOTE : CORD LENGTH = 12 IN	

70000-17552	
Engine Block Heater 400 Watts, 115 Volts 70000-91510 For KUBOTA Equipment utilizing engines with 30mm freeze plug	
	
ENGINE APPLICATION:	ALL SUPER MINI TIER II MODEL WITH HALF FLOAT VALVE COVER
LOCATION:	REAR OF CYLINDER HEAD IN REAR FROST PLUG
METHOD OF ATTACHMENT:	KNOCK IN TYPE
NOTE: CORD LENGTH =60 IN , DISTANCE REQUIRED AT LEAST 80 MM OF CLEARANCE AT REAR OF HEAD	

70000-81500	
	
ENGINE APPLICATION:	ANY HOSE WITH AN 1.25 DIAMETER
LOCATION:	LOWER RAD HOSE
METHOD OF ATTACHMENT:	CUT RAD HOSE AND SECURE WITH CLAMPS
NOTE: 60 IN CORD	

70000-82500	
	
ENGINE APPLICATION:	ANY HOSE WITH AN 1.50 DIAMETER
LOCATION:	LOWER RAD HOSE
METHOD OF ATTACHMENT:	CUT RAD HOSE AND SECURE WITH CLAMPS
NOTE: 60 IN CORD	

Block Heaters

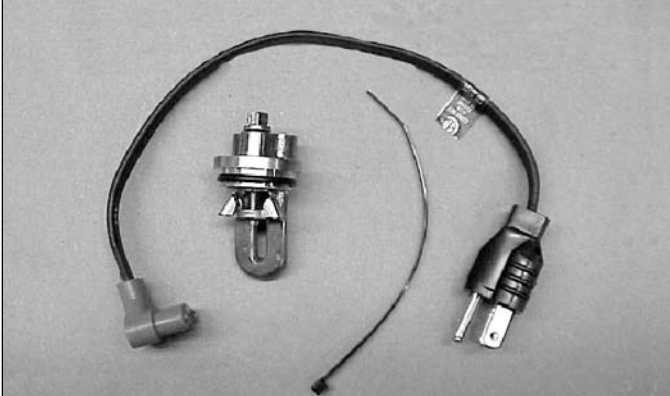70000-73595	
Engine Heater 400 Watts, 115 Volts Code No.: 70000-73595	
	
ENGINE APPLICATION:	ALL SUPER MINI PRE TIER II WITHOUT HALF FLOAT VALVE COVER
LOCATION:	REAR OF CYLINDER HEAD IN FROST PLUG
METHOD OF ATTACHMENT:	INTEGRAL CLAMP WITH O-RING SEAL
NOTE : 12 IN CORD	

70000-91530	
Engine Block Heater 400 Watts, 115 Volts 70000-00546 For KUBOTA Equipment utilizing engines with 25mm freeze plug	
	
ENGINE APPLICATION:	Z602-D902
LOCATION:	INJECTION SIDE OF CRANKCASE USING 25MM FROST PLUG
METHOD OF ATTACHMENT:	KNOCK IN TYPE
NOTE : 60 IN CORD	

REPLACEMENT CORDS		
BLOCK HEATER	REPLACEMENT CORD	LENGTH
72000-00546	72000-00547	60" CORD
70000-91510	70000-91515	12" CORD
70000-73595	70000-93595	12" CORD
70000-17552	70000-17553	60" CORD
70000-91530	70000-91535	60" CORD
7000-81500	72000-01013	46"CORD
70000-92500	72000-01014	12" CORD
72000-00546	70000-00773	12" CORD

Starter Switches Assy And Keys

		STARTER SWITCH ASSEMBLIES																
		66706-55120	15377-63610	15393-63610	66711-55130	12581-55120	15248-63590	16286-63602	15193-63590	18510-63590	19237-63590	EG273-63590	1E013-63590	67980-55150	66101-55200	RC101-53602	66591-55500	15957-63600
KIT NUMBER												463	436					
DESCRIP- TION	PART NUMBER																	
STARTER SWITCH	66711-55130	X	X	X	replaced by 66706-55120	X					X							
	6C040-55410						X											
	37410-59110							X										
	15193-63610								X									
	18510-63600									X								
	RA111-53690											X	X			X		
	66101-55210														X			
	67985-55160													X				
	66591-55513																X	
	68331-53610																	X
KEY & CASE ASSY	15393-63700			X														
	15193-63700								X									
KEY	66711-55240	X	X	X		X					X							
	15248-63700						X											
	37410-55150							X						X	X			
	35260-31852								X									
	RC101-53630											X	X			X		
	15878-63700																	
	34710-55150																	
	18510-63720																	
	66591-61190																X	
	15957-63700																	X
LABEL	66706-55150	X											X					
	12581-55150					X						X						
	11420-87520							X										
	66704-55150															X		
	19237-87690										X							
CASE	15193-63710			X					X									

Starter Switches And Keys

[15878-63700 KEY](#)



APPLICATION

[37410-55150 KEY](#)



APPLICATION

16286-36302

[66711-55240 KEY](#)



APPLICATION

66706-55120, 15377-63610, 15393-63610, 12581-55120,
19237-63590, EO1,E51 KIT

[RC101-53630 KEY](#)



APPLICATION

EG273-63590, 1E013-63590, EO2 ,EO2G

[15248-63700 KEY](#)



APPLICATION

15248-63590, SQ GENS

[15193-63700 KEY](#)



APPLICATION

15193-63590, 35260-31852

Starter Switches And Keys

18510-63720 KEY

APPLICATION
GENERATORS

66711-55240 KEY

APPLICATION
15393-63610, 15393-63700

35260-31852 KEY

APPLICATION
15193-63590

Miscellaneous Part Numbers

TOUCH UP PAINT			
PART NUMBER	DESCRIPTION	SIZE	USED ON
70000-00197	ENGINE BLUE	12 oz SPRAY	INDUSTRIAL ENGINE
70000-00199	ENGINE BLUE	1 QT CAN	INDUSTRIAL ENGINE
70000-00200	ENGINE BLUE	1 GAL CAN	INDUSTRIAL ENGINE
70000-73713	ORANGE II	12 oz SPRAY	SQ GENERATORS
70000-73712	ORANGE II	1 QT CAN	SQ GENERATORS
70000-73711	ORANGE II	1 GAL CAN	SQ GENERATORS
70000-00210	DARK GRAY	12 oz SPRAY	ENGINES
70000-73358	DARK GRAY	1 QT CAN	ENGINES
70000-73269	DARK GRAY	1 GAL CAN	ENGINES
72000-03012	CONSTRUCTION NAVY	12 oz SPRAY	SQ GENERATORS
72000-03011	CONSTRUCTION NAVY	1 QT CAN	SQ GENERATORS
72000-03010	CONSTRUCTION NAVY	1 GAL CAN	SQ GENERATORS
GENERATOR BATTERIES			
51-450	BATTERY	12V-45Ah	GL6500S
55B24R	BATTERY	12 V x 36Ah / 5 hr	GL7000
55B24R	BATTERY	12 V x 36Ah / 5 hr	GL1100
***** batteries are to be order through East penn battery *****			
OPTIONAL GENERATOR PARTS			
G3106-6310A	CONTROL PANEL COVER BLUE		GL7000
G3116-6311A	CONTROL PANEL COVER BLUE		GL11000
GENERATOR REMOTE START KITS			
<GLRC	REMOTE START	90 FT CORD	GL 6500S
<GL2RC	REMOTE START	90 FT CORD	GL7000/ GL11000
SEALANTS			
72000-01097	THREE BOND 1208D	250 GRAM	ALL APPLICATIONS
07935-05250	THREE BOND 1212	250 GRAM	ALL APPLICATIONS
72000-01095	THREE BOND 1217D	330 ML	ALL APPLICATIONS
72000-01096	THREE BOND 1521C	150 ML (adhesive)	ALL APPLICATIONS
COMPLETE O-RING KIT			
07916-25005	O-RING KIT	COMPLETE	ALL APPLICATIONS

Machine To Engine Cross Reference

MACHINE SERIES	ENGINE MODEL	STROKE SERIES
T SERIES		
T1400	GH400V-L	
T1700	GH540V	
T1600H	Z482	68
T1460	GH410V	
T1560	GH420V	
T1760	WG510V	
T1570	GH430V	
T1670	GH430V	
T1770	GH570V	Kohler
T1870	GH630V	Kohler
T1770	GH500V	Kawasaki
T1770	GH570V	Kawasaki
T1870	GH531V	Kawasaki
T1870	GH630V	Kawasaki

TG SERIES		
TG1860G	WG590V	
TG1860	D722-E-GX	68

G SERIES		
G2160	D782-EG21	73.6
G2460	WG752-ES-24G	68
G1700	D662-L	68
G1800	D662	68
G2000	WG750-G	68
G3200	Z400-G	62.2
G4200	Z430	62.2
G5200	D600	62.2

GR SERIES		
GR2000G	GH630V	Kawasaki
GR2100	D782	68

F SERIES		
GF1800	D722-FM	68
F2000	D950-FM1	70
F2100	D950-FM2	70
F2400	D1105-F	78.4

...continued

MACHINE SERIES	ENGINE MODEL	STROKE SERIES
F SERIES		
FZ2100	D905-FZ	73.6
FZ2400	D1105-FZ	78.4
F2260	D1005-EFM	73.6
F2560	D1105-EFM	78.4
F3060	V1305-EFM	73.6
F3560	V1505-EFM	78.4
F2880	D1105-E2-FM2	73.6
F3680	V1505-E2-FM3	78.4

ZD SERIES		
ZD18	D722-E-XFM5	68
ZD21	D782-E-XFM5	73.6
ZD25	D1005-	
ZD28	D1105-E-XFM5	78.4
ZG20	GH630	
ZG23	GH680	
ZD321	D782-E2-ZD	73.6
ZD326	D1005-E2-ZD-2	73.6
ZD331	D1305-E3-ZD	73.6

B SERIES		
B6000	ZL600	
B5100	Z500	70
B6100	D650-A	70
B7100 note1	D750-A	70
B4200	Z600A	70
B6200	D850-LA	70
B7200	D950-LA	70
B8200	D950-A-DT	70
B1550	D850-5B	70
B1750	D950-5B	70
B2150	V1200-5B	70
B20	D950-AT	70
B21	D1005-TLB	73.6
B1700	D905A	73.6
B2100	D1005A	73.6
B2400	D1105A	74.8
B7300	D722-D10SP	68

more...

[more...](#)

Machine To Engine Cross Reference

...continued

MACHINE SERIES	ENGINE MODEL	STROKE SERIES
B SERIES		
B7400	D722-E-D14	68
B7500	D1005-E-D16	73.6
B7510	D1005-E-D16	73.6
B7610	D1105-E-D16	78.4
B7810	V1505-E-D16	78.4
B2410	D1105-E-D16	78.4
B2710	V1305-E-D12	73.6
B2910	V1505-E-D16	78.4
B2630	D1105-E2-D21	78.4
B3030	V1505-E-D16	78.4

B7100HSDT (Note 1)		
	D750AH ~ SN 171078	no w/pump
D750-AH	D750AH SN 171079~	with w/pump
	D750AH SN 725148~	no w/pump

BX SERIES		
BX1500	Z602-E	73.6 (SM)
BX1800	D722-E-BX1	68
BX2200	D905-E-BX1	73.6
BX1830	D722-E-BX	68
BX2230	D902-E-BX	73.6 (SM)
BX23	D905-E-BX	73.6
BX1850	D722-EBX2	SM
BX2350	D902-E2BX2	73.6(SM)
BX24	D902-E2BX2	73.6(SM)

PX SERIES		
PX2100	D950-AM	70

L SERIES		
L200	Z1100-A	
L210	Z1100-A	
L260	Z1300-A	
L175	Z750-A	82
L185	Z751-A	82

more...

...continued

MACHINE SERIES	ENGINE MODEL	STROKE SERIES
L SERIES		
L225	D1101-A	82
L235	D1102-A	82
L245	DH1101-A	82
L275	D1302-A	82
L285	V1501-A	82
L295	D1301-A	82
L305	D1301-A	82
L345	V1501-DA	82
L355SS	V1702-A	82
L2250	D1302-DIA	82
L2350	D1102-A	82
L2550	D1402-DIA	82
L2650	D1402-DIA	82
L2850	V1702-DIA	82
L2950	D1462-DIA	82
L3350	V1902-DIA	82
L3450	V1902-DIA	82
L3650	V1902-DIA	82
L4150	F2302-DIA	82
L4350	V2203-DIA	92.4
L4850	F2503-DIA	92.4
L5450	F2803-DIA	92.4
L2500	D1403-AE-2	92.4
L2600	D1403-AE	92.4
L2800	D1403-M-E2A	92.4
L2900	D1503-L-A	92.4
L3000	D1503-AE	92.4
L3300	D1703-A	92.4
L3400	D1703-MA-E2A	92.4
L4300	V2203-AN	92.4
L3600	V1903-A	92.4
L4200	V2203-A	92.4
L3010	D1503-L-A	92.4
L3410	D1703-A	92.4
L3710	V1903-A	92.4
L4310	V2203-A	92.4
L4610	V2203-EHA	92.4
L3130	D1503-MA-2E-GST	92.4

more...

Machine To Engine Cross Reference

...continued

MACHINE SERIES	ENGINE MODEL	STROKE SERIES
L SERIES		
L3430	D1703-MA-2E-GST	92.4
L3830	D1803-MA-2E-GST	92.4
L4330	V2203-MA-2E-GST	92.4
L4400	V2203-M-E2A	92.4
L4630	V2203-MA-2E-GST	92.4
L5030	V2403-MA-2E-GST	92.4
L3240	D1703-M-E2-HST	92.4
L3540	D1803-M-E2-HST	92.4
L3940	V2003-M-E2-HST	92.4
L4240	V2003-M-E2-HST	92.4
L4720	V2403-M-E2-HST	92.4
L5240	V2403-M-TE2-HST	92.4
L5740	V2403-M-TE2-HST	92.4

RTV SERIES		
RTV 900	D902-E	73.6 (SM)
RTV1100	D1105	78.4

TRACTOR/ LOADER/ BACKHOE		
B20	D950-AT	70
B21	D1005-TLB	73.6

TRACTOR/ LOADER/ BACKHOE		
B26	D1105-E2-D21	73.6
L35	D1703-TLB	92.4
L39	D1803-MA-2E-GST	92.4
L48	V2403-M-ETLB	102.4

CARRIER		
KC50	GH170-GCL-Y-EC	
KC51	GH170-1-E2-GCL-Y	

WHEEL LOADER		
R400	V1902-BDW2	82
R310	V1305-RP	73.6
R410	V1902-BDW-3	82
R320	V1305-RP	73.6
R320	V1305-E2RP	73.6

...continued

MACHINE SERIES	ENGINE MODEL	STROKE SERIES
WHEEL LOADER		
R420	D1503-T-RP	92.4
R420S	D1503-M-T-E2RP-1	92.4
R510	V2203-DI-BDW	92.4
	up to #10081	
	V2203-BDW	92.4
	after #10082	
R520	V2203-RP	92.4
R520S	V2203-M-E2RP	92.4

EXCAVATORS		
KH007	Z430-K1	62.2
KH5	Z600-K1	70
KH18	S2200-D	82
KH28	S2600-D	82
KH35	D850-BH-W1	70
KH41	D950-BH-1	70
KH60	D1302-BH-2	82
KH66	D1402-BH-4	82
KH90	V1702-BH	82
KH101	V1902-BH-3	82
KH151	V1902-BH-4	82
KH191	S2800D	82
K-008	D722-BH	68
KX41	D1105-BH	78.4
KX71	V1505-BH	78.4
KX101	V1902BH-5	82
KX151	V1902BH-6	82
KX41-2	D1105-BH-7	78.4
KX41-2V	D1105-EBH-7	78.4
KX61-2	D1105-EBH-6	78.4
KX91-2	V1505-EBH-7	78.4
KX121-2	V2203-EBH-4	92.4
KX161-2	V2203-EBH-5	92.4

EXCAVATORS -3		
KO08-3	D722-E2BH-3	68
KX41-3	D902-E2BH	68
KX71-3	V1505-E2-BH10	78.4

more...

more...

Machine To Engine Cross Reference

...continued

MACHINE SERIES	ENGINE MODEL	STROKE SERIES
EXCAVATORS -3		
KX080-3	V3800DI-E2BH	110
KX91-3	D1503 -M-E2BH-2	92.4
KX121-3	V2203-M-E2BH-2	92.4
KX161-3	V2403-M-E2BH-2	92.4
U15	D782-E2BH-4	73.6
U25	D1105-E2BH-14	78.4
U35S	D1503 M-E2BH-2	92.4

M SERIES		
M4050	S2600-L	82
M4500	S2600-A	82
M7500	V4000-A	115
M5030	S2802-DIA	82
M6030	D3200-2A	115
M7030	V4000-3A	115
M8030	V4300-1A	115
M4950	S2800-A	82
M5950	D3200-A	115
M6950	V4000-2A	115
M7950	V4300-A	115
M8950	V4300-TA	115
M7580	V4302-A	125
M8580	V4702-A	125
M9580	V4702-TA	125
M4700	F2803-LA	92.4
M4900	F2803-ELA	92.4
MX5000	V2403-EA	102.4
M5400	F2803-A	92.4
M5700	F2803-EA	92.4
M6800	V3300-E	110
M8200	V3300-TE	110
M9000	V3300-TIE	110
M5040	V3007-DI-E2	110
M6040	V3307-DI-E2	120
M7040	V3307-DI-E2-1	120
M8540	V3800DI-T-E2	120
M9540	V3800DI-T-E2	120

MACHINE SERIES	ENGINE MODEL	STROKE SERIES
M-SERIES		
M95	V3800-DI	120
M95X	V3800TE2	120
M96S	V3800-DI-T	120
M100	V4702-TH	125
M105	V3800-DI	120
M105S	V3800-DI-TI	120
M105X	V3800TIE2	120
M108S	V3800-CR-TI	120
M108X	V3800=CR-TI	120
M110	F5802-TE	125
M120	F5802-TEI	125
M125	F5802-TEI	125
M125X	F5802TE2	125

Glow Plug Specifications

Part No.	Rated Voltage	Resistance	Temperature Rise	Overall Length	Tightening Torque		Manufacturer
					Body	Terminal Nut	
15204-65512	10.5 V	0.94 to 1.16Ω (at 20 □)	Must rise to 800 °C within 22 seconds (at 10.5 V)	84 mm	15 to 20 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
15221-65513	10.5 V	1.40 to 1.70Ω (at 20 □)	Must rise to 800 °C within 20 seconds (at 10.5 V)	74 mm	20 to 25 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
15231-65512	10.5 V	0.95 to 1.15Ω (at 20 □)	Must rise to 800 °C within 22 seconds (at 10.5 V)	84 mm	14.7 to 19.6 N□m (M10×1.25)	0.98 to 1.76 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
15261-65514	10.5 V	1.40 to 1.70Ω (at 20 □)	Must rise to 800 °C within 18 seconds (at 10.5 V)	71 mm	20 to 25 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
15451-65511	10.5 V	1.0 to 1.2Ω (at 20 □)	Must rise to 800 °C within 25 seconds (at 10.5 V)	158 mm	25 to 35 N□m (M12×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
15521-65512	10.5 V	0.75Ω (at 20 □)	Must rise to 800 °C within 16 seconds (at 10.5 V)	74 mm	20 to 25 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
15571-65512	10.5 V	0.75Ω (at 20 □)	Must rise to 800 °C within 16 seconds (at 10.5 V)	158 mm	25 to 35 N□m (M12×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
15694-65513	11 V	1.0Ω (at 20 □)	Must rise to 800 °C within 6 seconds (at 11.0 V)	71 mm	20 to 25 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
15806-65513	11 V	1.0Ω (at 20 □)	Must rise to 800 °C within 6 seconds (at 11.0 V)	74 mm	20 to 25 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
15951-65513	10.5 V	0.75Ω (at 20 □)	Must rise to 800 °C within 16 seconds (at 10.5 V)	72 mm	20 to 25 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16065-65511	11 V	0.9Ω (at 20 □)	Must rise to 800 °C within 6 seconds (at 11.0 V)	69 mm	8 to 15 N□m (M8×1.0)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16241-65512	11 V	1.0Ω (at 20 □)	Must rise to 800 °C within 6 seconds (at 11.0 V)	79.5 mm	20 to 25 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16261-65511	11 V	0.90Ω (at 20 □)	Must rise to 800 °C within 5 seconds (at 11.0 V)	76 mm	19.6 to 24.5 N□m (M10×1.25)	0.98 to 1.47 N□m (M4×0.7)	JIDOSHA KIKI CO., LTD.
16292-65511	11 V	1.0Ω (at 20 □)	Must rise to 800 °C within 6 seconds (at 11.0 V)	79.5 mm	20 to 25 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16296-65511	23 V	5.0Ω (at 20 □)	Must rise to 800 °C within 10 seconds (at 23.0 V)	75 mm	8 to 15 N□m (M8×1.0)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16415-65512	11 V	1.0Ω (at 20 □)	Must rise to 800 °C within 6 seconds (at 11.0 V)	85 mm	20 to 25 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16616-65511	10.5 V	1.40 to 1.70Ω (at 20 □)	Must rise to 800 °C within 18 seconds (at 10.5 V)	69 mm	7.8 to 14.7 N□m (M8×1.0)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16641-65511	23 V	4.1Ω (at 20 □)	Must rise to 800 °C within 10 seconds (at 23.0 V)	125 mm	15 to 20 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16665-65512	23 V	4Ω (at 20 □)	Must rise to 800 °C within 10 seconds (at 23.0 V)	85 mm	15 to 20 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16695-65512	10.5 V	1.40 to 1.70Ω (at 20 □)	Must rise to 800 °C within 18 seconds (at 10.5 V)	79.5 mm	15 to 20 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16851-65512	11 V	0.9Ω (at 20 □)	Must rise to 800 °C within 6 seconds (at 11.0 V)	69 mm	8 to 15 N□m (M8×1.00)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
16881-65513	23 V	5.0Ω (at 20 □)	Must rise to 800 °C within 10 seconds (at 23.0 V)	75 mm	8 to 15 N□m (M8×1.0)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.
17331-65511	10.5 V	0.5Ω (at 20 □)	Must rise to 800 °C within 16 seconds (at 10.5 V)	125 mm	15 to 20 N□m (M10×1.25)	1.0 to 1.8 N□m (M4×0.7)	NGK SPARK PLUGCO., LTD.

[more...](#)

Glow Plug Specifications (continued)

...continued

Part No.	Rated Voltage	Resistance	Temperature Rise	Overall Length	Tightening Torque		Manufacturer
					Body	Terminal Nut	
17529-65511	12.5 V	2.85 to 3.55Ω (at 20 °C)	Must rise to 800 °C within 25 seconds (at 12.5 V)	69 mm	8 to 15 N·m (M8×1.0)	1.0 to 1.8 N·m (M4×0.7)	NGK SPARK PLUGCO., LTD.
19077-65513	11 V	1.0Ω (at 20 °C)	Must rise to 800 °C within 6 seconds (at 11.0 V)	85 mm	20 to 25 N·m (M10×1.25)	1.0 to 1.8 N·m (M4×0.7)	NGK SPARK PLUGCO., LTD.
19215-65513	12.5 V	2.05 to 2.55Ω (at 20 °C)	Must rise to 800 °C within 25 seconds (at 12.5 V)	72 mm	20 to 25 N·m (M10×1.25)	1.0 to 1.8 N·m (M4×0.7)	NGK SPARK PLUGCO., LTD.
19821-65513	10.5 V	0.8Ω (at 20 °C)	Must rise to 800 °C within 16 seconds (at 10.5 V)	125 mm	15 to 20 N·m (M10×1.25)	1.0 to 1.8 N·m (M4×0.7)	NGK SPARK PLUGCO., LTD.
19872-65511	23 V	4.1Ω (at 20 °C)	Must rise to 800 °C within 10 seconds (at 23.0 V)	74 mm	20 to 25 N·m (M10×1.25)	1.0 to 1.8 N·m (M4×0.7)	NGK SPARK PLUGCO., LTD.
19883-65511	23 V	4.1Ω (at 20 °C)	Must rise to 800 °C within 10 seconds (at 23.0 V)	71 mm	20 to 25 N·m (M10×1.25)	1.0 to 1.8 N·m (M4×0.7)	NGK SPARK PLUGCO., LTD.
1G772-65511	11 V	0.95Ω (at 20 °C)	Must rise to 800 °C within 6 seconds (at 11.0 V)	143.5 mm	7.7 to 9.3 N·m (M8×1.0)	1.0 to 1.8 N·m (M4×0.7)	NGK SPARK PLUGCO., LTD.
1G911-65512	11 V	1.0Ω (at 20 °C)	Must rise to 800 °C within 6 seconds (at 11.0 V)	125 mm	15 to 20 N·m (M10×1.25)	1.0 to 1.8 N·m (M4×0.7)	NGK SPARK PLUGCO., LTD.

Alternator Specifications - IC Regular Type

Code Number	Nominal Voltage	Output	Speed of Charging Start	Maximum Speed	Temperature Range	Direction of Rotation	Weight	Manufacturer
15253-64012	12 V	35 A at 14 V, 4000 rpm	1200 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 3.3 kg	DENSO CORPORATION
15276-64011	12 V	25 A at 14 V, 4000 rpm	1250 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 3.3 kg	DENSO CORPORATION
15321-64012	12 V	20 A at 14 V, 4000 rpm	1250 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 3.3 kg	DENSO CORPORATION
15411-64011	12 V	25 A at 14 V, 4000 rpm	1250 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 3.3 kg	DENSO CORPORATION
15451-64013	12 V	45 A at 14 V, 4500 rpm	860 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 5.4 kg	DENSO CORPORATION
15469-64011	12 V	30 A at 14 V, 4000 rpm	1050 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 3.5 kg	DENSO CORPORATION
15471-64011	12 V	25 A at 14 V, 4000 rpm	1250 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 3.7 kg	DENSO CORPORATION
15606-64011	12 V	25 A at 14 V, 4000 rpm	1250 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 3.7 kg	DENSO CORPORATION
15621-64011	12 V	35 A at 14 V, 4000 rpm	1200 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 3.7 kg	DENSO CORPORATION
15763-64012	12 V	35 A at 14 V, 4000 rpm	1200 rpm at 14 V	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 3.5 kg	DENSO CORPORATION
17525-64011	12 V	40 A at 13.5 V, 5000 rpm	1050 rpm at 13.5 V	12400 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.5 kg	HITACHI LTD.
19489-64011	12 V	35 A at 14 V, 4000 rpm	1200 rpm at 14 V	12000 rpm	-40 to 80 °C	Counter-clockwise viewed from pulley side	Approx. 3.3 kg	DENSO CORPORATION
16241-64012	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.7 kg	DENSO CORPORATION
16541-64012	12 V	45 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.35 kg	DENSO CORPORATION
16705-64012	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.7 kg	DENSO CORPORATION
16771-64012	12 V	45 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
17356-64012	12 V	45 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
17369-64011	12 V	45 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.1 kg	DENSO CORPORATION
17474-64011	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.7 kg	DENSO CORPORATION
17559-64013	12 V	70 A at 13.5 V, 5000 rpm	1250 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 4.4 kg	DENSO CORPORATION
66436-64013	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.7 kg	DENSO CORPORATION
16495-64013	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.75 kg	DENSO CORPORATION

[more...](#)

Alternator Specifications - IC Regular Type (continued)

...continued

Code Number	Nominal Voltage	Output	Speed of Charging Start	Maximum Speed	Temperature Range	Direction of Rotation	Weight	Manufacturer
16615-64012	12 V	60 A at 13.5 V, 5000 rpm	1180 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
17580-64012	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.7 kg	DENSO CORPORATION
1G090-64011	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.75 kg	DENSO CORPORATION
1G595-64011	12 V	60 A at 13.5 V, 5000 rpm	1180 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.2 kg	DENSO CORPORATION
1G728-64011	12 V	60 A at 13.5 V, 5000 rpm	1180 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
TA043-74012	12 V	60 A at 13.5 V, 5000 rpm	1180 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
16404-64012	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.75 kg	DENSO CORPORATION
16652-64012	12 V	45 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
16678-64012	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.7 kg	DENSO CORPORATION
17490-64011	12 V	45 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
19260-64012	12 V	90 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 5.3 kg	DENSO CORPORATION
19279-64013	12 V	70 A at 13.5 V, 5000 rpm	1250 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 4.4 kg	DENSO CORPORATION
19630-64012	12 V	60 A at 13.5 V, 5000 rpm	1180 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
1G012-64011	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.75 kg	DENSO CORPORATION
1G070-64011	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.75 kg	DENSO CORPORATION
1G486-64011	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.9 kg	DENSO CORPORATION
16231-64012	12 V	30 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.7 kg	DENSO CORPORATION
16427-64012	12 V	30 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.7 kg	DENSO CORPORATION
1K531-64013	12 V	30 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.7 kg	DENSO CORPORATION
16483-64012	12 V	45 A at 13.5 V, 5000 rpm	1110 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
T1065-15602	12 V	45 A at 13.5 V, 5000 rpm	1110 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.05 kg	DENSO CORPORATION
PH101-81402	12 V	30 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.75 kg	DENSO CORPORATION
17077-64011	24 V	20 A at 27 V, 5000 rpm	1030 rpm at 27 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.14 kg	DENSO CORPORATION

Alternator Specifications - IC Regular Type (continued)

...continued

Code Number	Nominal Voltage	Output	Speed of Charging Start	Maximum Speed	Temperature Range	Direction of Rotation	Weight	Manufacturer
17588-64012	24 V	20 A at 27 V, 5000 rpm	1030 rpm at 27 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.14 kg	DENSO CORPORATION
19883-64012	24 V	20 A at 27 V, 5000 rpm	1030 rpm at 27 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.1 kg	DENSO CORPORATION
1G882-64013	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.78 kg	DENSO CORPORATION
1K411-64011	12 V	60 A at 13.5 V, 5000 rpm	1180 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
1K574-64015	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.75 kg	DENSO CORPORATION
17241-64011	12 V	40 A at 13.5 V, 5000 rpm	1020 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.17 kg	DENSO CORPORATION
3A011-74013	12 V	40 A at 13.5 V, 5000 rpm	1350 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.75 kg	DENSO CORPORATION
3A611-74012	12 V	60 A at 13.5 V, 5000 rpm	1180 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
K7561-61912	12 V	60 A at 13.5 V, 5000 rpm	1180 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
T1270-15682	12 V	60 A at 13.5 V, 5000 rpm	1180 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 3.15 kg	DENSO CORPORATION
16540-64013	12 V	60 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 4.5 kg	DENSO CORPORATION
17498-64012	12 V	60 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 4.5 kg	DENSO CORPORATION
33970-64015	12 V	80 A at 13.5 V, 5000 rpm	950 rpm at 13.5 V	18000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 5.3 kg	DENSO CORPORATION
17279-64012	12 V	35 A at 13.5 V, 5000 rpm	1150 rpm at 13.5 V	15000 rpm	-30 to 90 °C	Clockwise viewed from pulley side	Approx. 2.77 kg	DENSO CORPORATION
1C010-64011	12 V	45 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 3.65 kg	mitsubishi electric corp.
1C011-64011	12 V	60 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 4.2 kg	mitsubishi electric corp.
1G373-64011	12 V	45 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 3.65 kg	mitsubishi electric corp.
1K011-64012	24 V	30 A at 27 V, 5000 rpm	1400 rpm at 27 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 4.85 kg	mitsubishi electric corp.
1G541-64011	12 V	70 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 4.2 kg	mitsubishi electric corp.
3A612-74011	12 V	70 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 4 kg	mitsubishi electric corp.

[more...](#)

Alternator Specifications - IC Regular Type (continued)

...continued

Code Number	Nominal Voltage	Output	Speed of Charging Start	Maximum Speed	Temperature Range	Direction of Rotation	Weight	Manufacturer
3F261-64011	12 V	80 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 5 kg	mitsubishi electric corp.
3N301-64011	12 V	80 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 4.6 kg	mitsubishi electric corp.
1G371-64011	24 V	50 A at 27 V, 5000 rpm	1400 rpm at 27 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 5.7 kg	mitsubishi electric corp.
1K021-64011	24 V	60 A at 27 V, 5000 rpm	1400 rpm at 27 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 5.6 kg	mitsubishi electric corp.
3F271-64011	12 V	115 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 6.3 kg	mitsubishi electric corp.
3M760-64011	12 V	80 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 4.8 kg	mitsubishi electric corp.
3P200-64011	12 V	80 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 4.6 kg	mitsubishi electric corp.
3P201-64011	12 V	115 A at 13.5 V, 5000 rpm	1400 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 6.1 kg	mitsubishi electric corp.
1G524-64011	12 V	60 A at 13.5 V, 5000 rpm	18000 rpm at 13.5 V	18000 rpm	-30 to 100 °C	Clockwise viewed from pulley side	Approx. 4.2 kg	mitsubishi electric corp.

AC Dynamo Specifications

Code Number	Nominal Voltage	Output	Speed of Charging Start	Maximum Speed	Temperature Range	Direction of Rotation	Weight	Manufacturer
15261-64014	12 V	2.5 to 3.5 A at 16 V, 4250 rpm	1000 rpm (Battery voltage at 16 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 1.6 kg	KOKUSAN DENKICO., LTD.
15372-64013	12 V	8.5 to 9.5 A at 14 V, 4250 rpm	1800 rpm (Battery voltage at 14 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 1.6 kg	KOKUSAN DENKICO., LTD.
15531-64017	12 V	14 to 15 A at 14 V, 5200 rpm	1800 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 1.3 kg	KOKUSAN DENKICO., LTD.
15679-64012	12 V	25 to 26 A at 12 V, 5200 rpm	1600 rpm (Battery voltage at 12 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 2.3 kg	KOKUSAN DENKICO., LTD.
15868-64011	12 V	18 to 19 A at 14 V, 5200 rpm	1400 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 1.9 kg	KOKUSAN DENKICO., LTD.
15878-64011	12 V	35 to 36 A at 12 V, 7000 rpm	2000 rpm (Battery voltage at 12 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 2.3 kg	KOKUSAN DENKICO., LTD.
15964-64012	12 V	10.5 to 11.5 A at 14 V, 3500 rpm	750 rpm (Battery voltage at 14 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 2.1 kg	KOKUSAN DENKICO., LTD.
15973-64013	12 V	10.5 to 12.0 A at 14 V, 3700 rpm	1800 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 2.1 kg	KOKUSAN DENKICO., LTD.
16879-64011	12 V	11 A or more at 14 V, 4300 rpm	800 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 1.9 kg	KOKUSAN DENKICO., LTD.
17054-64011	12 V	14 to 15 A at 14 V, 5200 rpm	1800 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 1.4 kg	KOKUSAN DENKICO., LTD.
17472-64012	12 V	15 to 16 A at 13 V, 5200 rpm	1600 rpm (Battery voltage at 13 V)	12000 rpm	-30 to 80 °C	Clockwise viewed from pulley side	Approx. 2.35 kg	KOKUSAN DENKICO., LTD.
17485-64012	12 V	15 to 16 A at 13 V, 5200 rpm	1600 rpm (Battery voltage at 13 V)	12000 rpm	-30 to 80 °C	Clockwise viewed from pulley side	Approx. 2.35 kg	KOKUSAN DENKICO., LTD.
17531-64012	12 V	14 to 15 A at 14 V, 5200 rpm	1800 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 1.4 kg	KOKUSAN DENKICO., LTD.
19269-64011	12 V	14 to 15 A at 14 V, 5200 rpm	1800 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 130 °C	Clockwise viewed from pulley side	Approx. 1.3 kg	KOKUSAN DENKICO., LTD.
19482-64013	12 V	4.0 to 5.0 A at 14 V, 1500 rpm	700 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 1.9 kg	KOKUSAN DENKICO., LTD.
19844-64012	12 V	18 to 19 A at 14 V, 5200 rpm	1400 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 1.9 kg	KOKUSAN DENKICO., LTD.

[more...](#)

AC Dynamo Specifications (continued)

...continued

Code Number	Nominal Voltage	Output	Speed of Charging Start	Maximum Speed	Temperature Range	Direction of Rotation	Weight	Manufacturer
1E120-64011	12V	20 to 21.5 A at 12 V, 5000 rpm	-	12000 rpm	-30 to 80 °C	Clockwise viewed from pulley side	Approx. 2.5 kg	KOKUSAN DENKICO., LTD.
1K125-64011	12 V	7.0 to 8.5 A at 14 V, 5200 rpm	1800 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 1.4 kg	KOKUSAN DENKICO., LTD.
6A830-59251	12 V	14 to 15 A at 14 V, 5200 rpm	1800 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 1.3 kg	KOKUSAN DENKICO., LTD.
6C040-59252	12 V	14 to 15 A at 14 V, 5200 rpm	1800 rpm (Battery voltage at 13 V)	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 1.4 kg	KOKUSAN DENKICO., LTD.
PH100-81401	12 V	6 to 6.5 A at 14 V, 3600 rpm	1700 rpm (Battery voltage at 14 V)	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 1.4 kg	KOKUSAN DENKICO., LTD.
RP201-53501	12 V	10A or more at 14 V, 4300 rpm	1700 rpm (Battery voltage at 14 V)	12000 rpm	-40 to 80 °C	Clockwise viewed from pulley side	Approx. 1.8 kg	KOKUSAN DENKICO., LTD.

Stop Solenoid Specifications

Code Number	Rated Voltage	Rated Current	Pull Force	Hold Force	Stroke	Type	Temperature Range	Manufacturer
15471-60012	12 V	11 to 13 A	“31.4 N at 8 V, 20 °C, stroke 9.0 mm”	-	8.5 to 9.5 mm	“Energize to stop”	-30 to 80 °C	Denso Corporation
15878-60011	12 V	“50 A (Pull coil) 1 A (Hold coil)”	24 N at 12 V, 20 °C, stroke 20.0 mm	31 N at 12 V, 20 °C	20 mm or less	“Energize to run”	-30 to 80 °C	Hitchi Ltd.
16259-60012	12 V	“70 A (Pull coil) 1 A (Hold coil)”	Must pull-in against return spring at 9 V, 20 °C	Must hold-in against return spring at 9 V, 20 °C	12 mm or less	“Energize to run”	-30 to 80 °C	Hitchi Ltd.
16271-60012	12 V	12.5 to 14.5 A	19.6 N at 8 V, 20 °C, stroke 10.0 mm	-	10 mm	“Energize to stop”	-30 to 100 °C	Denso Corporation
16296-60014	12 V	19.6 A (Pull coil) 0.59 A (Hold coil)	Must pull-in against return spring at 18 V, 121 °C	Must hold-in against return spring at 12 V, 121 °C	12 mm	“Energize to run”	-40 to 121 °C	Woodward Controls Inc.
16616-60014	12 V	32 A (Pull coil) 0.8 A (Hold coil)	Must pull-in against return spring at 9 V, 80 °C	Must hold-in against return spring at 6 V, 80 °C	12 mm	“Energize to run”	-40 to 80 °C	Synchro-Start Products Inc.
16644-60012	12 V	19.6 A (Pull coil) 0.59 A (Hold coil)	Must pull-in against return spring at 18 V, 80 °C	Must hold-in against return spring at 12 V, 80 °C	14 mm	“Energize to run”	-30 to 80 °C	Woodward Controls Inc.
16661-60012	12 V	36.5 A (Pull coil) 0.97 A (Hold coil)	Must pull-in against return spring at 9 V, 80 °C	Must hold-in against return spring at 6 V, 80 °C	14 mm	“Energize to run”	-30 to 80 °C	Woodward Controls Inc.
16851-60013	12 V	11 to 13 A	31.4 N at 8 V, 20 °C, stroke 9.0 mm	-	8.5 to 9.5 mm	“Energize to stop”	-30 to 80 °C	Denso Corporation
17077-60011	12 V	17 A (Pull coil) 0.25 A (Hold coil)	39.2 N at 24 V, 25 °C, stroke 25.0 mm	88.2 N at 24 V, 25 °C	25 mm	“Energize to run”	-40 to 121 °C	Synchro-Start Products Inc.
17153-60011	12 V	“50 A (Pull coil) 1 A (Hold coil)”	24.5 N at 24 V, 20 °C, stroke 20.0 mm	31.4 N at 24 V, 20 °C	20 mm or less	“Energize to run”	-30 to 80 °C	Hitchi Ltd.
17208-60014	12 V	32 A (Pull coil) 0.77 A (Hold coil)	Must pull-in against return spring at 8 V, 20 °C	Must hold-in against return spring at 5 V, 20 °C	9.6 to 10.4 mm	“Energize to run”	-30 to 100 °C	Kyosan Denki Co. Ltd.
17454-60011	12 V	36.5 A (Pull coil) 0.98 A (Hold coil)	Must pull-in against return spring at 9 V, 121 °C	Must hold-in against return spring at 6 V, 121 °C	11.9 mm	“Energize to run”	-40 to 121 °C	Synchro-Start Products Inc.
17490-60011	12 V	36.5 A (Pull coil) 0.98 A (Hold coil)	Must pull-in against return spring at 9 V, 80 °C	Must hold-in against return spring at 6 V, 80 °C	14 mm	“Energize to run”	-30 to 80 °C	Synchro-Start Products Inc.
17514-60011	12 V	30 A (Pull coil) 0.7 A (Hold coil)	39.2 N at 12 V, 25 °C, stroke 25 mm	88.2 N at 12 V, 25 °C	25 mm	“Energize to run”	-40 to 121 °C	Synchro-Start Products Inc.
17520-60013	12 V	46.5 A (Pull coil) 1.10 A (Hold coil)	49 N at 12 V, 90 °C, stroke 9.0 mm	178 N at 12 V, 20 °C	8.5 to 10 mm	“Energize to run”	-40 to 120 °C	Woodward Controls Inc.
17594-60014	12 V	36.5 A (Pull coil) 0.98 A (Hold coil)	Must pull-in against return spring at 9 V, 121 °C	Must hold-in against return spring at 6 V, 121 °C	12 mm	“Energize to run”	-40 to 121 °C	Woodward Controls Inc.
18901-15101	12 V	“25 A (Pull coil) 5 A (Hold coil)”	9.8 N at 12 V, 20 °C, stroke 27 mm	9.8 N at 12 V, 20 °C	27 mm	“Energize to run”	-30 to 80 °C	Denso Corporation
19004-60011	12 V	47 A (Pull coil) 1.1 A (Hold coil)	89 N at 12 V, 20 °C, stroke 25.4 mm	178 N at 12 V, 20 °C	25.4 mm	“Energize to run”	-40 to 121 °C	Synchro-Start Products Inc.

[more...](#)

Stop Solenoid Specifications (continued)

...continued

Code Number	Rated Voltage	Rated Current	Pull Force	Hold Force	Stroke	Type	Temperature Range	Manufacturer
19026-60011	12 V	41 A (Pull coil) 0.75 A (Hold coil)	44.1 N at 12 V, 25 °C, stroke 25 mm	88.2 N at 12 V, 25 °C	25 mm	"Energize to run"	-40 to 121 °C	Synchro-Start Products Inc.
19091-17551	12 V	6.5 to 8.5 A	19.6 N at 16 V, 20 °C, stroke 10 mm	-	10 mm	"Energize to stop"	-30 to 100 °C	Denso Corporation
19091-17874	12 V	36.5 A (Pull coil) 0.98 A (Hold coil)	Must pull-in against return spring at 9 V, 121 °C	Must hold-in against return spring at 6 V, 121 °C	12 mm	"Energize to run"	-40 to 121 °C	Woodward Controls Inc.
19460-60014	12 V	36.5 A (Pull coil) 0.49 A (Hold coil)	Must pull-in against return spring at 9 V, 121 °C	Must hold-in against return spring at 4 V, -40 °C	14 mm	"Energize to run"	-40 to 121 °C	Woodward Controls Inc.
1A021-60014	12 V	32 A (Pull coil) 0.77 A (Hold coil)	Must pull-in against return spring at 8 V, 20 °C	Must hold-in against return spring at 5 V, 20 °C	14 mm	Energize to run	-30 to 100 °C	Kyosan Denki Co. Ltd.
1C010-60014	12 V	32 A (Pull coil) 0.77 A (Hold coil)	Must pull-in against return spring at 8 V, 20 °C	Must hold-in against return spring at 5 V, 20 °C	9.6 to 10.4 mm	Energize to run	-30 to 100 °C	Kyosan Denki Co. Ltd.
1E152-60011	12 V	36.5 A (Pull coil) 0.98 A (Hold coil)	Must pull-in against return spring at 8 V, 20 °C	Must hold-in against return spring at 5 V, 20 °C	11.9 mm	Energize to run	-40 to 121 °C	Woodward Controls Inc.
1E152-60011	12 V	33.8 A (Pull coil) 0.54 A (Hold coil)	Must pull-in against return spring at 8 V, 20 °C	Must hold-in against return spring at 5 V, 20 °C	10 mm	Energize to run	-40 to 121 °C	Woodward Controls Inc.
1G386-60012	12 V	46.5 A (Pull coil) 1.1 A (Hold coil)	49 N at 12 V, 90 °C, stroke 9 mm	178 N	8.5 to 10.0 mm	Energize to run	-40 to 120 °C	Woodward Controls Inc.
1G577-60011	12 V	36.5 A (Pull coil) 0.49 A (Hold coil)	Must pull-in against return spring at 8 V, 20 °C	Must hold-in against return spring at 5 V, 20 °C	10 mm	Energize to run	-40 to 121 °C	Woodward Controls Inc.
1G820-60022	12 V	33.8 A (Pull coil) 0.54 A (Hold coil)	Must pull-in against return spring at 8 V, 20 °C	Must hold-in against return spring at 5 V, 20 °C	10 mm	Energize to run	-40 to 121 °C	Woodward Controls Inc.
1G882-60011	12 V	47 A (Pull coil) 1.1 A (Hold coil)	89 N at 12 V, 20 °C, stroke 25.4 mm	178 N at 12 V, 20 °C	25.4 mm	Energize to run	-40 to 121 °C	Woodward Controls Inc.
1G925-60011	12 V	36.5 A (Pull coil) 0.49 A (Hold coil)	Must pull-in against return spring at 7 V, 20 °C	Must hold-in against return spring at 6 V, 121 °C	14 mm	Energize to run	-40 to 121 °C	Woodward Controls Inc.
1K011-60014	24 V	24 A (Pull coil) 0.39 A (Hold coil)	Must pull-in against return spring at 16 V, 20 °C	Must hold-in against return spring at 10 V, 20 °C	9.6 to 10.4 mm	Energize to run	-30 to 100 °C	Kyosan Denki Co. Ltd.
6A320-31151	12 V	32 A (Pull coil) 0.77 A (Hold coil)	Must pull-in against return spring at 8 V, 20 °C	Must hold-in against return spring at 5 V, 20 °C	9.6 to 10.4 mm	Energize to run	-40 to 100 °C	Kyosan Denki Co. Ltd.

Starter Specifications

Code Number	Rated Voltage	Output	Rated Time	Starter Performance (Load)		Direction of Rotation	No. of Pinion Teeth	Weight	Manufacturer
				Voltage / Torque	Current / Speed				
ELECTROMAGNETIC DRIVE TYPE									
14601-63013	12 V	0.8 kW	30 sec.	9.5 V / 6.86 N·m	270 A / 1200 rpm	Clockwise viewed from pinion end	9	Approx. 4.3 kg	DENSO CORPORATION
14958-63011	12 V	1.1 kW	30 sec.	8.7 V / 6.86 N·m	230 A / 1130 rpm	Clockwise viewed from pinion end	11	Approx. 3.2 kg	DENSO CORPORATION
15201-63011	12 V	1.0 kW	30 sec.	9.5 V / 7.84 N·m	240 A / 1200 rpm	Clockwise viewed from pinion end	9	Approx. 8.0 kg	DENSO CORPORATION
15221-63018	12 V	0.8 kW	30 sec.	9.5 V / 6.86 N·m	270 A / 1200 rpm	Clockwise viewed from pinion end	9	Approx. 4.3 kg	DENSO CORPORATION
15231-63017	12 V	0.8 kW	30 sec.	9.5 V / 6.86 N·m	270 A / 1200 rpm	Clockwise viewed from pinion end	9	Approx. 4.3 kg	DENSO CORPORATION
15271-63014	12 V	0.8 kW	30 sec.	9.5 V / 6.86 N·m	270 A / 1200 rpm	Clockwise viewed from pinion end	9	Approx. 4.3 kg	DENSO CORPORATION
15321-63016	12 V	1.0 kW	30 sec.	9.5 V / 7.84 N·m	240 A / 1200 rpm	Clockwise viewed from pinion end	9	Approx. 7 kg	DENSO CORPORATION
15331-63012	12 V	1.2 kW	30 sec.	9 V / 7.84 N·m	400 A / 1500 rpm	Clockwise viewed from pinion end	9	Approx. 9.5 kg	DENSO CORPORATION
15852-63013	12 V	0.7 kW	30 sec.	9 V / 2.75 N·m	150 A / 1900 rpm	Clockwise viewed from pinion end	9	Approx. 3.4 kg	MITSUBISHI ELECTRIC CORP.
16225-63013	12 V	0.95 kW	30 sec.	9 V / 2.84 N·m	150 A / 1950 rpm	Clockwise viewed from pinion end	9	Approx. 4.1 kg	MITSUBISHI ELECTRIC CORP.
16226-63012	12 V	0.95 kW	30 sec.	9 V / 2.84 N·m	150 A / 1950 rpm	Clockwise viewed from pinion end	9	Approx. 4.1 kg	MITSUBISHI ELECTRIC CORP.
19007-63011	12 V	0.95 kW	30 sec.	9 V / 2.84 N·m	150 A / 1950 rpm	Clockwise viewed from pinion end	9	Approx. 4.1 kg	MITSUBISHI ELECTRIC CORP.
19026-63012	12 V	0.8 kW	30 sec.	9.5 V / 6.86 N·m	270 A / 1200 rpm	Counterclockwise viewed from pinion end	8	Approx. 4.3 kg	DENSO CORPORATION
19837-63013	12 V	0.8 kW	30 sec.	9 V / 2.75 N·m	150 A / 2000 rpm	Clockwise viewed from pinion end	9	Approx. 4 kg	MITSUBISHI ELECTRIC CORP.
67980-31151	12 V	1.0 kW	30 sec.	8 V / 4.71 N·m	200 A / 1240 rpm	Clockwise viewed from pinion end	9	Approx. 2.8 kg	DENSO CORPORATION
1E152-63011	12 V	0.8 kW	30 sec.	9 V / 2.75 N·m	150 A / 2000 rpm	Clockwise viewed from pinion end	9	Approx. 4.0 kg	MITSUBISHI ELECTRIC CORP.
1G023-63011	12 V	1.0 kW	30 sec.	8 V / 4.71 N·m	200 A / 1240 rpm	Clockwise viewed from pinion end	9	Approx. 2.8 kg	DENSO CORPORATION
1G069-63011	12 V	1.1 kW	30 sec.	8.7 V / 6.86 N·m	230 A / 1130 rpm	Clockwise viewed from pinion end	9	Approx. 3.0 kg	DENSO CORPORATION
1G772-63011	12 V	2.5 kW	30 sec.	7.7 V / 10.59 N·m	400 A / 1280 rpm	Clockwise viewed from pinion end	9	Approx. 5.6 kg	MITSUBISHI ELECTRIC CORP.
6A100-31151	12 V	1.0 kW	30 sec.	8 V / 4.71 N·m	200 A / 1240 rpm	Clockwise viewed from pinion end	9	Approx. 2.8 kg	DENSO CORPORATION
6A671-31151	12 V	1.1 kW	30 sec.	8.7 V / 6.86 N·m	230 A / 1130 rpm	Clockwise viewed from pinion end	9	Approx. 3.0 kg	DENSO CORPORATION
6C090-59212	12 V	0.85 kW	30 sec.	9 V / 2.75 N·m	150 A / 2100 rpm	Clockwise viewed from pinion end	9	Approx. 3.5 kg	MITSUBISHI ELECTRIC CORP.

[more...](#)

Starter Specifications (continued)

...continued

Code Number	Rated Voltage	Output	Rated Time	Starter Performance (Load)		Direction of Rotation	No. of Pinion Teeth	Weight	Manufacturer
				Voltage / Torque	Current / Speed				
6C090-59301	12 >	0.7 kW	30 sec.	9 V / 2.75 N□m	150 A / 1900 rpm	Clockwise viewed from pinion end	8	Approx. 3.4 kg	MITSUBISHI ELECTRIC CORP.
E9153-63011	12 >	0.6 kW	30 sec.	9 V / 2.75 N□m	150 A / 1900 rpm	Clockwise viewed from pinion end	9	Approx. 3.0 kg	DENSO CORPORATION
K3511-81411	12 >	1.1 kW	30 sec.	8.7 V / 6.86 N□m	230 A / 1130 rpm	Clockwise viewed from pinion end	9	Approx. 3.0 kg	DENSO CORPORATION
GEAR REDUCTION TYPE									
15401-63012	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 5.1 kg	DENSO CORPORATION
15425-63016	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	9	Approx. 4.7 kg	DENSO CORPORATION
15451-63017	12 >	2.5 kW	30 sec.	8 V / 19.6 N□m	600 A / 1100 rpm	Clockwise viewed from pinion end	9	Approx. 8.5 kg	DENSO CORPORATION
15461-63015	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.6 kg	DENSO CORPORATION
15481-63013	12 >	2.5 kW	30 sec.	8 V / 19.6 N□m	600 A / 1100 rpm	Clockwise viewed from pinion end	9	Approx. 8.5 kg	DENSO CORPORATION
15501-63014	12 >	1.0 kW	30 sec.	8 V / 6.37 N□m	230 A / 1180 rpm	Clockwise viewed from pinion end	9	Approx. 4.0 kg	DENSO CORPORATION
15504-63012	12 >	1.0 kW	30 sec.	8 V / 6.37 N□m	230 A / 1180 rpm	Clockwise viewed from pinion end	9	Approx. 3.95 kg	DENSO CORPORATION
15511-63011	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 4.6 kg	DENSO CORPORATION
15521-63011	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 5.4 kg	DENSO CORPORATION
15527-63013	12 >	2.5 kW	30 sec.	8 V / 19.6 N□m	600 A / 1100 rpm	Clockwise viewed from pinion end	11	Approx. 8.5 kg	DENSO CORPORATION
15601-63012	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	11	Approx. 5.4 kg	DENSO CORPORATION
15611-63013	12 >	2.5 kW	30 sec.	8 V / 19.6 N□m	600 A / 1100 rpm	Clockwise viewed from pinion end	11	Approx. 8.5 kg	DENSO CORPORATION
15621-63015	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	11	Approx. 3.6 kg	DENSO CORPORATION
15707-63013	12 >	3.0 kW	30 sec.	7 V / 29.4 N□m	890 A / 940 rpm	Clockwise viewed from pinion end	9	Approx. 10.5 kg	DENSO CORPORATION
15741-63012	12 >	1.0 kW	30 sec.	8 V / 6.37 N□m	230 A / 1180 rpm	Clockwise viewed from pinion end	9	Approx. 3.95 kg	DENSO CORPORATION
15833-63015	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	11	Approx. 4.7 kg	DENSO CORPORATION
16235-63012	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	13	Approx. 3.6 kg	DENSO CORPORATION
16271-63013	12 >	1.2 kW	30 sec.	8 V / 9.81 N□m	280 A / 900 rpm	Clockwise viewed from pinion end	9	Approx. 4.0 kg	DENSO CORPORATION
16285-63012	12 >	1.2 kW	30 sec.	8 V / 9.81 N□m	280 A / 900 rpm	Clockwise viewed from pinion end	9	Approx. 3.35 kg	DENSO CORPORATION

[more...](#)

Starter Specifications (continued)

...continued

Code Number	Rated Voltage	Output	Rated Time	Starter Performance (Load)		Direction of Rotation	No. of Pinion Teeth	Weight	Manufacturer
				Voltage / Torque	Current / Speed				
16531-63015	12 >	2.5 kW	30 sec.	8 V / 19.6 N□m	600 A / 1100 rpm	Clockwise viewed from pinion end	9	Approx. 8.6 kg	DENSO CORPORATION
16541-63014	12 >	2.5 kW	30 sec.	8 V / 19.6 N□m	600 A / 1100 rpm	Clockwise viewed from pinion end	9	Approx. 8.6 kg	DENSO CORPORATION
16551-63013	12 >	3.0 kW	30 sec.	7 V / 29.4 N□m	890 A / 940 rpm	Clockwise viewed from pinion end	9	Approx. 10.8 kg	DENSO CORPORATION
16611-63013	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.6 kg	DENSO CORPORATION
16612-63012	12 >	1.0 kW	30 sec.	8 V / 6.37 N□m	230 A / 1180 rpm	Clockwise viewed from pinion end	9	Approx. 3.8 kg	DENSO CORPORATION
16614-63011	12 >	1.2 kW	30 sec.	8 V / 9.81 N□m	280 A / 900 rpm	Clockwise viewed from pinion end	9	Approx. 4.0 kg	DENSO CORPORATION
16617-63012	24 >	1.4 kW	30 sec.	20 V / 13.23 N□m	180 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.95 kg	DENSO CORPORATION
16652-63015	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	9	Approx. 4.7 kg	DENSO CORPORATION
16661-63015	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.6 kg	DENSO CORPORATION
16695-63013	12 >	1.2 kW	30 sec.	8 V / 9.81 N□m	280 A / 900 rpm	Clockwise viewed from pinion end	9	Approx. 3.35 kg	DENSO CORPORATION
16871-63012	12 >	1.0 kW	30 sec.	8 V / 6.37 N□m	230 A / 1180 rpm	Clockwise viewed from pinion end	9	Approx. 3.8 kg	DENSO CORPORATION
16883-63012	12 >	1.0 kW	30 sec.	8 V / 6.37 N□m	230 A / 1180 rpm	Clockwise viewed from pinion end	9	Approx. 3.8 kg	DENSO CORPORATION
17077-63014	24 >	1.4 kW	30 sec.	20 V / 13.24 N□m	180 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.95 kg	DENSO CORPORATION
17121-63014	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	11	Approx. 4.7 kg	DENSO CORPORATION
17123-63016	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	9	Approx. 4.7 kg	DENSO CORPORATION
17298-63013	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.6 kg	DENSO CORPORATION
17311-63014	12 >	1.0 kW	30 sec.	8 V / 6.37 N□m	230 A / 1180 rpm	Clockwise viewed from pinion end	9	Approx. 4.0 kg	DENSO CORPORATION
17341-63015	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.6 kg	DENSO CORPORATION
17381-63015	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	11	Approx. 3.6 kg	DENSO CORPORATION
17423-63012	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	13	Approx. 3.6 kg	DENSO CORPORATION
17490-63014	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	9	Approx. 4.7 kg	DENSO CORPORATION
17588-63012	24 >	4.5kW	30 sec.	17 V / 39.2 N□m	530 A / 950 rpm	Clockwise viewed from pinion end	11	Approx. 8.4 kg	DENSO CORPORATION
17594-63012	12 >	1.2 kW	30 sec.	8 V / 9.81 N□m	280 A / 900 rpm	Clockwise viewed from pinion end	9	Approx. 3.35 kg	DENSO CORPORATION

Starter Specifications (continued)

...continued

Code Number	Rated Voltage	Output	Rated Time	Starter Performance (Load)		Direction of Rotation	No. of Pinion Teeth	Weight	Manufacturer
				Voltage / Torque	Current / Speed				
19013-63013	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	11	Approx. 3.6 kg	DENSO CORPORATION
19090-17862	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.6 kg	DENSO CORPORATION
19202-63011	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	11	Approx. 5.4 kg	DENSO CORPORATION
19215-63013	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.6 kg	DENSO CORPORATION
19269-63013	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.6 kg	DENSO CORPORATION
19420-63012	12 >	1.2 kW	30 sec.	8 V / 9.81 N□m	280 A / 900 rpm	Clockwise viewed from pinion end	9	Approx. 3.4 kg	DENSO CORPORATION
19460-63013	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	9	Approx. 4.7 kg	DENSO CORPORATION
19616-63014	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.6 kg	DENSO CORPORATION
19821-63011	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	11	Approx. 4.6 kg	DENSO CORPORATION
19872-63013	24 >	4.5 kW	30 sec.	17 V / 39.2 N□m	530 A / 950 rpm	Clockwise viewed from pinion end	11	Approx. 8.5 kg	DENSO CORPORATION
19883-63012	24 >	1.4 kW	30 sec.	20 V / 13.23 N□m	180 A / 1000 rpm	Clockwise viewed from pinion end	9	Approx. 3.95 kg	DENSO CORPORATION
1G524-63011	12 >	2.7 kW	30 sec.	8 V / 19.6 N□m	600 A / 1130 rpm	Clockwise viewed from pinion end	9	Approx. 8.5 kg	DENSO CORPORATION
1G835-63011	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	11	Approx. 4.7 kg	DENSO CORPORATION
1G911-63012	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	9	Approx. 5.7 kg	DENSO CORPORATION
1K371-63011	12 >	2.0 kW	30 sec.	7.5 V / 12.7 N□m	500 A / 1300 rpm	Clockwise viewed from pinion end	9	Approx. 4.7 kg	DENSO CORPORATION
34070-16803	12 >	1.2 kW	30 sec.	8 V / 9.81 N□m	280 A / 900 rpm	Clockwise viewed from pinion end	9	Approx. 3.3 kg	DENSO CORPORATION
37560-63012	12 >	1.2 kW	30 sec.	8 V / 9.81 N□m	280 A / 900 rpm	Clockwise viewed from pinion end	9	Approx. 3.4 kg	DENSO CORPORATION
67955-59212	12 >	1.0 kW	30 sec.	8 V / 6.37 N□m	230 A / 1180 rpm	Clockwise viewed from pinion end	9	Approx. 3.8 kg	DENSO CORPORATION
K7561-61811	12 >	1.2 kW	30 sec.	8 V / 9.81 N□m	280 A / 900 rpm	Clockwise viewed from pinion end	9	Approx. 3.35 kg	DENSO CORPORATION
T1150-16801	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	8	Approx. 3.6 kg	DENSO CORPORATION
RC411-53202	12 >	1.4 kW	30 sec.	8.5 V / 13.24 N□m	350 A / 1000 rpm	Clockwise viewed from pinion end	8	Approx. 3.6 kg	DENSO CORPORATION
PLANTETARY GEAR REDUCTION TYPE									
16808-63011	12 >	1.0 kW	30 sec.	8 V / 4.71 N□m	200 A / 1240 rpm	Clockwise viewed from pinion end	9	Approx. 2.8 kg	DENSO CORPORATION

[more...](#)

Starter Specifications (continued)

...continued

Code Number	Rated Voltage	Output	Rated Time	Starter Performance (Load)		Direction of Rotation	No. of Pinion Teeth	Weight	Manufacturer
				Voltage / Torque	Current / Speed				
16824-63011	12 >	1.2 kW	30 sec.	7.5 V / 10.5 N□m	300 A / 880 rpm	Clockwise viewed from pinion end	8	Approx. 2.85 kg	MITSUBISHI ELECTRIC CORP.
16853-63011	12 >	0.95 kW	30 sec.	8 V / 4.8 N□m	200 A / 1260 rpm	Clockwise viewed from pinion end	8	Approx. 2.7 kg	MITSUBISHI ELECTRIC CORP.
1C010-63012	12 >	2.5 kW	30 sec.	7.7 V / 10.59 N□m	400 A / 1280 rpm	Clockwise viewed from pinion end	9	Approx. 5.6 kg	MITSUBISHI ELECTRIC CORP.
1G023-63011	12 >	1.0 kW	30 sec.	8.0 V / 4.71 N□m	200 A / 1240 rpm	Clockwise viewed from pinion end	9	Approx. 2.8 kg	DENSO CORPORATION
1G373-63011	12 >	3.0 kW	30 sec.	6.6 V / 13.23 N□m	500 A / 980 rpm	Clockwise viewed from pinion end	9	Approx. 6.8 kg	MITSUBISHI ELECTRIC CORP.
1K011-63012	24 >	3.2 kW	30 sec.	18.6 V / 12.94 N□m	250 A / 1550 rpm	Clockwise viewed from pinion end	9	Approx. 5.6 kg	MITSUBISHI ELECTRIC CORP.
1K012-63011	12 >	3.0 kW	30 sec.	6.6 V / 13.23 N□m	500 A / 980 rpm	Clockwise viewed from pinion end	9	Approx. 6.8 kg	MITSUBISHI ELECTRIC CORP.
6A320-59212	12 >	1.0 kW	30 sec.	8 V / 4.71 N□m	200 A / 1240 rpm	Clockwise viewed from pinion end	9	Approx. 2.8 kg	DENSO CORPORATION
6C040-59212	12 >	1.0 kW	30 sec.	7.7 V / 8.34 N□m	300 A / 980 rpm	Clockwise viewed from pinion end	8	Approx. 2.9 kg	MITSUBISHI ELECTRIC CORP.
6C070-59212	12 >	1.4 kW	30 sec.	7.5 V / 10.8 N□m	300 A / 870 rpm	Clockwise viewed from pinion end	8	Approx. 3.3 kg	MITSUBISHI ELECTRIC CORP.
6C140-59212	12 >	0.95 kW	30 sec.	8 V / 4.8 N□m	200 A / 1260 rpm	Clockwise viewed from pinion end	8	Approx. 2.7 kg	MITSUBISHI ELECTRIC CORP.
T1060-16805	12 >	1.2 kW	30 sec.	8.4 V / 7.2 N□m	250 A / 1200 rpm	Clockwise viewed from pinion end	8	Approx. 2.9 kg	HITACHI LTD.
T1270-16801	12 >	1.2 kW	30 sec.	8.4 V / 7.2 N□m	250 A / 1200 rpm	Clockwise viewed from pinion end	8	Approx. 2.9 kg	HITACHI LTD.